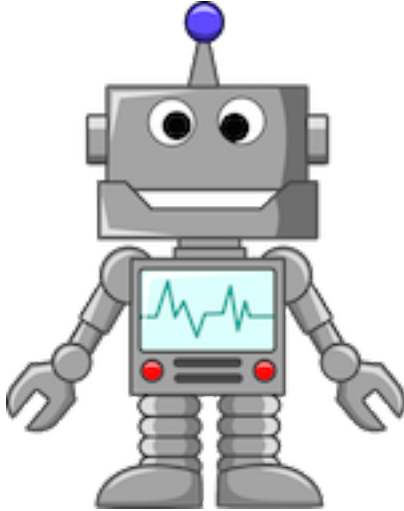

Servant Documentation

Servant Contributors

Feb 24, 2022

1	Tutorial	3
1.1	Install	3
1.2	A web API as a type	4
1.3	Serving an API	10
1.4	Querying an API	27
1.5	Generating Javascript functions to query an API	31
1.6	Documenting an API	39
1.7	Authentication in Servant	44
2	Cookbook	53
2.1	Structuring APIs	53
2.2	Record-based APIs: the simple case	56
2.3	Record-based APIs: the nested records case	60
2.4	Serving web applications over HTTPS	65
2.5	Overview	65
2.6	SQLite database	69
2.7	PostgreSQL connection pool	71
2.8	Using a custom monad	73
2.9	Inspecting, debugging, simulating clients and more	75
2.10	Customizing errors from Servant	78
2.11	Listing alternative responses and exceptions in your API types	81
2.12	Basic Authentication	85
2.13	Streaming out-of-the-box	87
2.14	Combining JWT-based authentication with basic access authentication	90
2.15	Hoist Server With Context for Custom Monads	93
2.16	File Upload (<code>multipart/form-data</code>)	100
2.17	Pagination	102
2.18	Generating mock curl calls	106
2.19	Error logging with Sentry	109
2.20	How To Test Servant Applications	111
2.21	OpenID Connect	120
3	Helpful Links	129
4	Principles	131



servant is a set of Haskell libraries for writing *type-safe* web applications but also *deriving* clients (in Haskell and other languages) or generating documentation for them, and more.

This is achieved by taking as input a description of the web API as a Haskell type. Servant is then able to check that your server-side request handlers indeed implement your web API faithfully, or to automatically derive Haskell functions that can hit a web application that implements this API, generate a Swagger description or code for client functions in some other languages directly.

If you would like to learn more, click the tutorial link below.

This is an introductory tutorial to **servant**. Whilst browsing is fine, it makes more sense if you read the sections in order, or at least read the first section before anything else.

Any comments, issues or feedback about the tutorial can be submitted to [servant's issue tracker](#).

1.1 Install

1.1.1 cabal-install

The whole tutorial is a `cabal` project and can be built locally as follows:

```
$ git clone https://github.com/haskell-servant/servant.git
$ cd servant
# build
$ cabal new-build tutorial
# load in ghci to play with it
$ cabal new-repl tutorial
```

1.1.2 stack

The servant `stack` template includes the working tutorial. To initialize this template, run:

```
$ stack new myproj servant
$ cd myproj
# build
$ stack build
# start server
$ stack exec myproj-exe
```

The code can be found in the `*.lhs` files under `doc/tutorial/` in the repository. Feel free to edit it while you're reading this documentation and see the effect of your changes.

1.1.3 nix

Nix users should feel free to take a look at the `nix/shell.nix` file in the repository and use it to provision a suitable environment to build and run the examples.

1.2 A web API as a type

The source for this tutorial section is a literate haskell file, so first we need to have some language extensions and imports:

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE TypeOperators #-}

module ApiType where

import Data.Text
import Data.Time (UTCTime)
import Servant.API
```

Consider the following informal specification of an API:

The endpoint at `/users` expects a GET request with query string parameter `sortBy` whose value can be one of `age` or `name` and returns a list/array of JSON objects describing users, with fields `age`, `name`, `email`, `registration_date`”.

You *should* be able to formalize that. And then use the formalized version to get you much of the way towards writing a web app. And all the way towards getting some client libraries, and documentation, and more.

How would we describe it with **servant**? An endpoint description is a good old Haskell **type**:

```
type UserAPI = "users" :> QueryParam "sortBy" SortBy :> Get '[JSON] [User]

data SortBy = Age | Name

data User = User {
  name :: String,
  age  :: Int,
  email :: String,
  registration_date :: UTCTime
}
```

Let’s break that down:

- `"users"` says that our endpoint will be accessible under `/users`;
- `QueryParam "sortBy" SortBy`, where `SortBy` is defined by `data SortBy = Age | Name`, says that the endpoint has a query string parameter named `sortBy` whose value will be extracted as a value of type `SortBy`.
- `Get '[JSON] [User]` says that the endpoint will be accessible through HTTP GET requests, returning a list of users encoded as JSON. You will see later how you can make use of this to make your data available under different formats, the choice being made depending on the [Accept header](#) specified in the client’s request.
- The `:>` operator that separates the various “combinators” just lets you sequence static path fragments, URL captures and other combinators. The ordering only matters for static path fragments and URL captures. `"users" :> "list-all" :> Get '[JSON] [User]`, equivalent to `/users/list-all`, is obviously not the

same as `"list-all" :> "users" :> Get '[JSON] [User]`, which is equivalent to `/list-all/users`. This means that sometimes `:>` is somehow equivalent to `/`, but sometimes it just lets you chain another combinator.

Tip: If your endpoint responds to `/` (the root path), just omit any combinators that introduce path segments. E.g. the following api has only one endpoint on `/`:

```
type RootEndpoint =
  Get '[JSON] User
```

We can also describe APIs with multiple endpoints by using the `:<|>` combinators. Here's an example:

```
type UserAPI2 = "users" :> "list-all" :> Get '[JSON] [User]
  :<|> "list-all" :> "users" :> Get '[JSON] [User]
```

`servant` provides a fair amount of combinators out-of-the-box, but you can always write your own when you need it. Here's a quick overview of the most often needed combinators that `servant` comes with.

1.2.1 Combinators

Static strings

As you've already seen, you can use type-level strings (enabled with the `DataKinds` language extension) for static path fragments. Chaining them amounts to `/`-separating them in a URL.

```
type UserAPI3 = "users" :> "list-all" :> "now" :> Get '[JSON] [User]
  -- describes an endpoint reachable at:
  -- /users/list-all/now
```

Delete, Get, Patch, Post and Put

The `Get` combinator is defined in terms of the more general `Verb`:

```
data Verb method (statusCode :: Nat) (contentType :: [*]) a
type Get = Verb 'GET 200
```

There are other predefined type synonyms for other common HTTP methods, such as e.g.:

```
type Delete = Verb 'DELETE 200
type Patch  = Verb 'PATCH 200
type Post   = Verb 'POST 200
type Put    = Verb 'PUT 200
```

There are also variants that do not return a 200 status code, such as for example:

```
type PostCreated = Verb 'POST 201
type PostAccepted = Verb 'POST 202
```

An endpoint always ends with a variant of the `Verb` combinator (unless you write your own combinators). Examples:

```
type UserAPI4 = "users" :> Get '[JSON] [User]
  :<|> "admins" :> Get '[JSON] [User]
```

StreamGet and StreamPost

Note: Streaming has changed considerably in `servant-0.15`.

The `StreamGet` and `StreamPost` combinators are defined in terms of the more general `Stream`

```
data Stream (method :: k1) (status :: Nat) (framing :: *) (contentType :: *) (a :: *)
type StreamGet = Stream 'GET 200
type StreamPost = Stream 'POST 200
```

These describe endpoints that return a stream of values rather than just a single value. They not only take a single content type as a parameter, but also a framing strategy – this specifies how the individual results are delineated from one another in the stream. The three standard strategies given with Servant are `NewlineFraming`, `NetstringFraming` and `NoFraming`, but others can be written to match other protocols.

Capture

URL captures are segments of the path of a URL that are variable and whose actual value is captured and passed to the request handlers. In many web frameworks, you’ll see it written as in `/users/:userid`, with that leading `:` denoting that `userid` is just some kind of variable name or placeholder. For instance, if `userid` is supposed to range over all integers greater or equal to 1, our endpoint will match requests made to `/users/1`, `/users/143` and so on.

The `Capture` combinator in **servant** takes a (type-level) string representing the “name of the variable” and a type, which indicates the type we want to decode the “captured value” to.

```
data Capture (s :: Symbol) a
-- s :: Symbol just says that 's' must be a type-level string.
```

In some web frameworks, you use regexes for captures. We use a `FromHttpApiData` class, which the captured value must be an instance of.

Examples:

```
type UserAPI5 = "user" :> Capture "userid" Integer :> Get '[JSON] User
-- equivalent to 'GET /user/:userid'
-- except that we explicitly say that "userid"
-- must be an integer

:<|> "user" :> Capture "userid" Integer :> DeleteNoContent
-- equivalent to 'DELETE /user/:userid'
```

In the second case, `DeleteNoContent` specifies a 204 response code and that the response will always be empty.

QueryParam, QueryParams, QueryFlag

`QueryParam`, `QueryParams` and `QueryFlag` are about parameters in the query string, i.e., those parameters that come after the question mark (`?`) in URLs, like `sortBy` in `/users?sortBy=age`, whose value is set to `age`. `QueryParams` lets you specify that the query parameter is actually a list of values, which can be specified using `?param=value1¶m=value2`. This represents a list of values composed of `value1` and `value2`. `QueryFlag` lets you specify a boolean-like query parameter where a client isn’t forced to specify a value. The absence or presence of the parameter’s name in the query string determines whether the parameter is considered to have the value `True` or `False`. For instance, `/users?active` would list only active users whereas `/users` would list them all.

Here are the corresponding data type declarations:

```
data QueryParam (sym :: Symbol) a
data QueryParams (sym :: Symbol) a
data QueryFlag (sym :: Symbol)
```

Examples:

```
type UserAPI6 = "users" :> QueryParam "sortBy" SortBy :> Get '[JSON] [User]
  -- equivalent to 'GET /users?sortBy={age, name}'
```

Again, your handlers don't have to deserialize these things (into, for example, a `SortBy`). **servant** takes care of it.

ReqBody

Each HTTP request can carry some additional data that the server can use in its *body*, and this data can be encoded in any format – as long as the server understands it. This can be used for example for an endpoint for creating new users: instead of passing each field of the user as a separate query string parameter or something dirty like that, we can group all the data into a JSON object. This has the advantage of supporting nested objects.

servant's `ReqBody` combinator takes a list of content types in which the data encoded in the request body can be represented and the type of that data. And, as you might have guessed, you don't have to check the content type header, and do the deserialization yourself. We do it for you. And return `Bad Request` or `Unsupported Content Type` as appropriate.

Here's the data type declaration for it:

```
data ReqBody (contentTypes :: [*]) a
```

Examples:

```
type UserAPI7 = "users" :> ReqBody '[JSON] User :> Post '[JSON] User
  -- - equivalent to 'POST /users' with a JSON object
  --   describing a User in the request body
  -- - returns a User encoded in JSON

:<|> "users" :> Capture "userid" Integer
  :> ReqBody '[JSON] User
  :> Put '[JSON] User
  -- - equivalent to 'PUT /users/:userid' with a JSON
  --   object describing a User in the request body
  -- - returns a User encoded in JSON
```

Request Headers

Request headers are used for various purposes, from caching to carrying auth-related data. They consist of a header name and an associated value. An example would be `Accept: application/json`.

The `Header` combinator in **servant** takes a type-level string for the header name and the type to which we want to decode the header's value (from some textual representation), as illustrated below:

```
data Header (sym :: Symbol) a
```

Here's an example where we declare that an endpoint makes use of the `User-Agent` header which specifies the name of the software/library used by the client to send the request.

```
type UserAPI8 = "users" :> Header "User-Agent" Text :> Get '[JSON] [User]
```

Content types

So far, whenever we have used a combinator that carries a list of content types, we've always specified '[JSON]'. However, **servant** lets you use several content types, and also lets you define your own content types.

Four content types are provided out-of-the-box by the core **servant** package: `JSON`, `PlainText`, `FormUrlEncoded` and `OctetStream`. If for some obscure reason you wanted one of your endpoints to make your user data available under those 4 formats, you would write the API type as below:

```
type UserAPI9 = "users" :> Get '[JSON, PlainText, FormUrlEncoded, OctetStream] [User]
```

(There are other packages that provide other content types. For example **servant-lucid** and **servant-blaze** allow to generate html pages (using **lucid** and **blaze-html**) and both come with a content type for html.)

We will further explain how these content types and your data types can play together in the [section about serving an API](#).

Response Headers

Just like an HTTP request, the response generated by a webserver can carry headers too. **servant** provides a `Headers` combinator that carries a list of `Header` types and can be used by simply wrapping the “return type” of an endpoint with it.

```
data Headers (ls :: [*]) a
```

If you want to describe an endpoint that returns a “User-Count” header in each response, you could write it as below:

```
type UserAPI10 = "users" :> Get '[JSON] (Headers '[Header "User-Count" Integer]_  
  ↳ [User])
```

Basic Authentication

Once you've established the basic routes and semantics of your API, it's time to consider protecting parts of it. Authentication and authorization are broad and nuanced topics; as **servant** began to explore this space we started small with one of HTTP's earliest authentication schemes: [Basic Authentication](#).

When protecting endpoints with basic authentication, we need to specify two items:

1. The **realm** of authentication as per the Basic Authentication spec.
2. The datatype returned by the server after authentication is verified. This is usually a `User` or `Customer` type datatype.

With those two items in mind, *servant* provides the following combinator:

```
data BasicAuth (realm :: Symbol) (userData :: *)
```

Which is used like so:

```
type ProtectedAPI11  
  = UserAPI -- this is public  
:<|> BasicAuth "my-realm" User :> UserAPI2 -- this is protected by auth
```

Empty APIs

Sometimes it is useful to be able to generalise an API over the type of some part of it:

```
type UserAPI12 innerAPI
  = UserAPI           -- this is the fixed bit of the API
  :<|> "inner" :> innerAPI -- this lets us put various other APIs under /inner
```

If there is a case where you do not have anything extra to serve, you can use the `EmptyAPI` combinator to indicate this:

```
type UserAPI12Alone = UserAPI12 EmptyAPI
```

This also works well as a placeholder for unfinished parts of an API while it is under development, for when you know that there should be *something* there but you don't yet know what. Think of it as similar to the unit type `()`.

Interoperability with `wai: Raw`

Finally, we also include a combinator named `Raw` that provides an escape hatch to the underlying low-level web library `wai`. It can be used when you want to plug a `wai Application` into your webservice:

```
type UserAPI13 = "users" :> Get '[JSON] [User]
  -- a /users endpoint

  :<|> Raw
  -- requests to anything else than /users
  -- go here, where the server will try to
  -- find a file with the right name
  -- at the right path
```

One example for this is if you want to serve a directory of static files along with the rest of your API. But you can plug in everything that is an `Application`, e.g. a whole web application written in any of the web frameworks that support `wai`.

Be mindful! The `servant-server`'s router works by pattern-matching the different routes that are composed using `:<|>`. `Raw`, as an escape hatch, matches any route that hasn't been matched by previous patterns. Therefore, any subsequent route will be silently ignored.

```
type UserAPI14 = Raw
  :<|> "users" :> Get '[JSON] [User]
  -- In this situation, the /users endpoint
  -- will not be reachable because the Raw
  -- endpoint matches requests before
```

A simple way to avoid this pitfall is to either use `Raw` as the last definition, or to always have it under a static path.

```
type UserAPI15 = "files" :> Raw
  -- The raw endpoint is under the /files
  -- static path, so it won't match /users.
  :<|> "users" :> Get '[JSON] [User]

type UserAPI16 = "users" :> Get '[JSON] [User]
  :<|> Raw
  -- The Raw endpoint is matched last, so
  -- it won't overlap another endpoint.
```

1.3 Serving an API

Enough chit-chat about type-level combinators and representing an API as a type. Can we have a webservice already?

1.3.1 A first example

Equipped with some basic knowledge about the way we represent APIs, let's now write our first webservice.

The source for this tutorial section is a literate haskell file, so first we need to have some language extensions and imports:

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE FlexibleInstances #-}
{-# LANGUAGE GeneralizedNewtypeDeriving #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE OverloadedStrings #-}
{-# LANGUAGE RankNTypes #-}
{-# LANGUAGE ScopedTypeVariables #-}
{-# LANGUAGE TypeOperators #-}

module Server where

import Prelude ()
import Prelude.Compat

import Control.Monad.Except
import Control.Monad.Reader
import Data.Aeson
import Data.Aeson.Types
import Data.Attoparsec.ByteString
import Data.ByteString (ByteString)
import Data.List
import Data.Maybe
import Data.String.Conversions
import Data.Time.Calendar
import GHC.Generics
import Lucid
import Network.HTTP.Media ((//), (/:))
import Network.Wai
import Network.Wai.Handler.Warp
import Servant
import System.Directory
import Text.Blaze
import Text.Blaze.Html.Renderer.Utf8
import Servant.Types.SourceT (source)
import qualified Data.Aeson.Parser
import qualified Text.Blaze.Html
```

Important: the `Servant` module comes from the `servant-server` package, the one that lets us run web servers that implement a particular API type. It reexports all the types from the `servant` package that let you declare API types as well as everything you need to turn your request handlers into a fully-fledged webserver. This means that in your applications, you can just add `servant-server` as a dependency, import `Servant` and not worry about anything else.

We will write a server that will serve the following API.

```
type UserAPI1 = "users" :> Get '[JSON] [User]
```

Here's what we would like to see when making a GET request to /users.

```
[ {"name": "Isaac Newton", "age": 372, "email": "isaac@newton.co.uk", "registration_
↪date": "1683-03-01"}
, {"name": "Albert Einstein", "age": 136, "email": "ae@mc2.org", "registration_date":
↪"1905-12-01"}
]
```

Now let's define our User data type and write some instances for it.

```
data User = User
  { name :: String
  , age  :: Int
  , email :: String
  , registration_date :: Day
  } deriving (Eq, Show, Generic)

instance ToJSON User
```

Nothing funny going on here. But we now can define our list of two users.

```
users1 :: [User]
users1 =
  [ User "Isaac Newton"    372 "isaac@newton.co.uk" (fromGregorian 1683 3 1)
  , User "Albert Einstein" 136 "ae@mc2.org"         (fromGregorian 1905 12 1)
  ]
```

We can now take care of writing the actual webservice that will handle requests to such an API. This one will be very simple, being reduced to just a single endpoint. The type of the web application is determined by the API type, through a *type family* named `Server`. (Type families are just functions that take types as input and return types.) The `Server` type family will compute the right type that a bunch of request handlers should have just from the corresponding API type.

The first thing to know about the `Server` type family is that behind the scenes it will drive the routing, letting you focus only on the business logic. The second thing to know is that for each endpoint, your handlers will by default run in the `Handler` monad. This is overridable very easily, as explained near the end of this guide. Third thing, the type of the value returned in that monad must be the same as the second argument of the HTTP method combinator used for the corresponding endpoint. In our case, it means we must provide a handler of type `Handler [User]`. Well, we have a monad, let's just `return` our list:

```
server1 :: Server UserAPI1
server1 = return users1
```

That's it. Now we can turn `server` into an actual webserver using `wai` and `warp`:

```
userAPI :: Proxy UserAPI1
userAPI = Proxy

-- 'serve' comes from servant and hands you a WAI Application,
-- which you can think of as an "abstract" web application,
-- not yet a webserver.
app1 :: Application
app1 = serve userAPI server1
```

The `userAPI` bit is, alas, boilerplate (we need it to guide type inference). But that's about as much boilerplate as you get.

And we're done! Let's run our webservice on the port 8081.

```
main :: IO ()
main = run 8081 app1
```

You can put this all into a file or just grab [servant's repo](#) and look at the `doc/tutorial` directory. This code (the source of this web page) is in `doc/tutorial/Server.lhs`.

If you run it, you can go to `http://localhost:8081/users` in your browser or query it with curl and you see:

```
$ curl http://localhost:8081/users
[{"email":"isaac@newton.co.uk","registration_date":"1683-03-01","age":372,"name":
↪ "Isaac Newton"}, {"email":"ae@mc2.org","registration_date":"1905-12-01","age":136,
↪ "name":"Albert Einstein"}]
```

1.3.2 More endpoints

What if we want more than one endpoint? Let's add `/albert` and `/isaac` to view the corresponding users encoded in JSON.

```
type UserAPI2 = "users"  => Get '[JSON] [User]
                :<|> "albert" => Get '[JSON] User
                :<|> "isaac"  => Get '[JSON] User
```

And let's adapt our code a bit.

```
isaac :: User
isaac = User "Isaac Newton" 372 "isaac@newton.co.uk" (fromGregorian 1683 3 1)

albert :: User
albert = User "Albert Einstein" 136 "ae@mc2.org" (fromGregorian 1905 12 1)

users2 :: [User]
users2 = [isaac, albert]
```

Now, just like we separate the various endpoints in `UserAPI` with `:<|>`, we are going to separate the handlers with `:<|>` too! They must be provided in the same order as in the API type.

```
server2 :: Server UserAPI2
server2 = return users2
        :<|> return albert
        :<|> return isaac
```

And that's it! You can run this example in the same way that we showed for `server1` and check out the data available at `/users`, `/albert` and `/isaac`.

1.3.3 From combinators to handler arguments

Fine, we can write trivial webservices easily, but none of the two above use any “fancy” combinator from `servant`. Let's address this and use `QueryParam`, `Capture` and `ReqBody` right away. You'll see how each occurrence of these combinators in an endpoint makes the corresponding handler receive an argument of the appropriate type automatically. You don't have to worry about manually looking up URL captures or query string parameters, or decoding/encoding data from/to JSON. Never.

We are going to use the following data types and functions to implement a server for API.


```

type API = "position" :> Capture "x" Int :> Capture "y" Int :> Get '[JSON] Position
         :<|> "hello" :> QueryParam "name" String :> Get '[JSON] HelloMessage
         :<|> "marketing" :> ReqBody '[JSON] ClientInfo :> Post '[JSON] Email

data Position = Position
  { xCoord :: Int
  , yCoord :: Int
  } deriving Generic

instance ToJSON Position

newtype HelloMessage = HelloMessage { msg :: String }
  deriving Generic

instance ToJSON HelloMessage

data ClientInfo = ClientInfo
  { clientName :: String
  , clientEmail :: String
  , clientAge :: Int
  , clientInterestedIn :: [String]
  } deriving Generic

instance FromJSON ClientInfo
instance ToJSON ClientInfo

data Email = Email
  { from :: String
  , to :: String
  , subject :: String
  , body :: String
  } deriving Generic

instance ToJSON Email

emailForClient :: ClientInfo -> Email
emailForClient c = Email from' to' subject' body'

  where from'    = "great@company.com"
        to'      = clientEmail c
        subject' = "Hey " ++ clientName c ++ ", we miss you!"
        body'    = "Hi " ++ clientName c ++ ",\n\n"
                  ++ "Since you've recently turned " ++ show (clientAge c)
                  ++ ", have you checked out our latest "
                  ++ intercalate ", " (clientInterestedIn c)
                  ++ " products? Give us a visit!"

```

We can implement handlers for the three endpoints:

```

server3 :: Server API
server3 = position
  :<|> hello
  :<|> marketing

  where position :: Int -> Int -> Handler Position
        position x y = return (Position x y)

```

(continues on next page)

```
hello :: Maybe String -> Handler HelloMessage
hello mname = return . HelloMessage $ case mname of
  Nothing -> "Hello, anonymous coward"
  Just n   -> "Hello, " ++ n

marketing :: ClientInfo -> Handler Email
marketing clientinfo = return (emailForClient clientinfo)
```

Did you see that? The types for your handlers changed to be just what we needed! In particular:

- a Capture "something" a becomes an argument of type a (for position);
- a QueryParam "something" a becomes an argument of type Maybe a (because an endpoint can technically be accessed without specifying any query string parameter, we decided to “force” handlers to be aware that the parameter might not always be there);
- a ReqBody contentTypeList a becomes an argument of type a;

And that’s it. Here’s the example in action:

```
$ curl http://localhost:8081/position/1/2
{"xCoord":1,"yCoord":2}
$ curl http://localhost:8081/hello
{"msg":"Hello, anonymous coward"}
$ curl http://localhost:8081/hello?name=Alp
{"msg":"Hello, Alp"}
$ curl -X POST -d '{"clientName":"Alp Mestanogullari", "clientEmail" : "alp@foo.com",
↪ "clientAge": 25, "clientInterestedIn": ["haskell", "mathematics"]}' -H 'Accept:
↪ application/json' -H 'Content-type: application/json' http://localhost:8081/
↪ marketing
{"subject":"Hey Alp Mestanogullari, we miss you!","body":"Hi Alp Mestanogullari,
↪ \n\nSince you've recently turned 25, have you checked out our latest haskell,
↪ mathematics products? Give us a visit!","to":"alp@foo.com", "from":"great@company.com
↪ "}
```

For reference, here’s a list of some combinators from **servant**:

- Delete, Get, Patch, Post, Put: these do not become arguments. They provide the return type of handlers, which usually is Handler <something>.
- Capture "something" a becomes an argument of type a.
- QueryParam "something" a, Header "something" a all become arguments of type Maybe a, because there might be no value at all specified by the client for these.
- QueryFlag "something" gets turned into an argument of type Bool.
- QueryParams "something" a gets turned into an argument of type [a].
- ReqBody contentTypeList a gets turned into an argument of type a.

1.3.4 The FromHttpApiData/ToHttpApiData classes

Wait... How does **servant** know how to decode the Ints from the URL? Or how to decode a ClientInfo value from the request body? The following three sections will help us answer these questions.

Captures and QueryParams are represented by some textual value in URLs. Headers are similarly represented by a pair of a header name and a corresponding (textual) value in the request’s “metadata”. How types are decoded

from headers, captures, and query params is expressed in a class `FromHttpApiData` (from the package [http-api-data](#)):

```
class FromHttpApiData a where
  {-# MINIMAL parseUrlPiece | parseQueryParam #-}
  -- | Parse URL path piece.
  parseUrlPiece :: Text -> Either Text a
  parseUrlPiece = parseQueryParam

  -- | Parse HTTP header value.
  parseHeader :: ByteString -> Either Text a
  parseHeader = parseUrlPiece . decodeUtf8

  -- | Parse query param value.
  parseQueryParam :: Text -> Either Text a
  parseQueryParam = parseUrlPiece
```

As you can see, as long as you provide either `parseUrlPiece` (for Captures) or `parseQueryParam` (for QueryParams), the other methods will be defined in terms of this.

[http-api-data](#) provides a decent number of instances, helpers for defining new ones, and wonderful documentation.

There's not much else to say about these classes. You will need instances for them when using `Capture`, `QueryParam`, `QueryParams`, and `Header` with your types. You will need `FromHttpApiData` instances for server-side request handlers and `ToHttpApiData` instances only when using **servant-client**, as described in the section about [deriving haskell functions to query an API](#).

1.3.5 Using content-types with your data types

The same principle was operating when decoding request bodies from JSON, and responses *into* JSON. (JSON is just the running example - you can do this with any content-type.)

This section introduces a couple of typeclasses provided by **servant** that make all of this work.

The truth behind JSON

What exactly is JSON (the type as used in `Get '[JSON] User`)? Like the 3 other content-types provided out of the box by **servant**, it's a really dumb data type.

```
data JSON
data PlainText
data FormUrlEncoded
data OctetStream
```

Obviously, this is not all there is to JSON, otherwise it would be quite pointless. Like most of the data types in **servant**, JSON is mostly there as a special *symbol* that's associated with encoding (resp. decoding) to (resp. from) the *JSON* format. The way this association is performed can be decomposed into two steps.

The first step is to provide a proper `MediaType` (from [http-media](#)) representation for JSON, or for your own content-types. If you look at the haddocks from this link, you can see that we just have to specify `application/json` using the appropriate functions. In our case, we can just use `(//) :: ByteString -> ByteString -> MediaType`. The precise way to specify the `MediaType` is to write an instance for the `Accept` class:

```
-- for reference:
class Accept ctype where
  contentType :: Proxy ctype -> MediaType
```

(continues on next page)

(continued from previous page)

```
instance Accept JSON where
  contentType _ = "application" // "json"
```

The second step is centered around the `MimeRender` and `MimeUnrender` classes. These classes just let you specify a way to encode and decode values into or from your content-type's representation.

```
class Accept ctype => MimeRender ctype a where
  mimeRender :: Proxy ctype -> a -> ByteString
  -- alternatively readable as:
  mimeRender :: Proxy ctype -> (a -> ByteString)
```

Given a content-type and some user type, `MimeRender` provides a function that encodes values of type `a` to lazy `ByteStrings`.

In the case of JSON, this is easily dealt with! For any type `a` with a `ToJSON` instance, we can render values of that type to JSON using `Data.Aeson.encode`.

```
instance ToJSON a => MimeRender JSON a where
  mimeRender _ = encode
```

And now the `MimeUnrender` class, which lets us extract values from lazy `ByteStrings`, alternatively failing with an error string.

```
class Accept ctype => MimeUnrender ctype a where
  mimeUnrender :: Proxy ctype -> ByteString -> Either String a
```

We don't have much work to do there either, `Data.Aeson.eitherDecode` is precisely what we need. However, it only allows arrays and objects as toplevel JSON values and this has proven to get in our way more than help us so we wrote our own little function around `aeson` and `attoparsec` that allows any type of JSON value at the toplevel of a "JSON document". Here's the definition in case you are curious.

```
eitherDecodeLenient :: FromJSON a => ByteString -> Either String a
eitherDecodeLenient input = do
  v :: Value <- parseOnly (Data.Aeson.Parser.value <*> endOfInput) (cs input)
  parseEither parseJSON v
```

This function is exactly what we need for our `MimeUnrender` instance.

```
instance FromJSON a => MimeUnrender JSON a where
  mimeUnrender _ = eitherDecodeLenient
```

And this is all the code that lets you use JSON with `ReqBody`, `Get`, `Post` and friends. We can check our understanding by implementing support for an HTML content-type, so that users of your webservice can access an HTML representation of the data they want, ready to be included in any HTML document, e.g. using `jQuery`'s `load` function, simply by adding `Accept: text/html` to their request headers.

Case-studies: servant-blaze and servant-lucid

These days, most of the haskellers who write their HTML UIs directly from Haskell use either `blaze-html` or `lucid`. The best option for `servant` is obviously to support both (and hopefully other templating solutions!). We're first going to look at `lucid`:

```
data HTMLLucid
```

Once again, the data type is just there as a symbol for the encoding/decoding functions, except that this time we will only worry about encoding since **lucid** doesn't provide a way to extract data from HTML.

```
instance Accept HTMLLucid where
  contentType _ = "text" // "html" /: ("charset", "utf-8")
```

Note that this instance uses the (/:) operator from **http-media** which lets us specify additional information about a content-type, like the charset here.

The rendering instances call similar functions that take types with an appropriate instance to an “abstract” HTML representation and then write that to a ByteString.

```
instance ToHtml a => MimeRender HTMLLucid a where
  mimeRender _ = renderBS . toHtml

-- let's also provide an instance for lucid's
-- 'Html' wrapper.
instance MimeRender HTMLLucid (Html a) where
  mimeRender _ = renderBS
```

For **blaze-html** everything works very similarly:

```
-- For this tutorial to compile 'HTMLLucid' and 'HTMLBlaze' have to be
-- distinct. Usually you would stick to one html rendering library and then
-- you can go with one 'HTML' type.
data HTMLBlaze

instance Accept HTMLBlaze where
  contentType _ = "text" // "html" /: ("charset", "utf-8")

instance ToMarkup a => MimeRender HTMLBlaze a where
  mimeRender _ = renderHtml . Text.Blaze.Html.toHtml

-- while we're at it, just like for lucid we can
-- provide an instance for rendering blaze's 'Html' type
instance MimeRender HTMLBlaze Text.Blaze.Html.Html where
  mimeRender _ = renderHtml
```

Both **servant-blaze** and **servant-lucid** let you use HTMLLucid and HTMLBlaze in any content-type list as long as you provide an instance of the appropriate class (ToMarkup for **blaze-html**, ToHtml for **lucid**).

We can now write a webservice that uses **servant-lucid** to show the HTMLLucid content-type in action. We will be serving the following API:

```
type PersonAPI = "persons" :> Get '[JSON, HTMLLucid] [Person]
```

where Person is defined as follows:

```
data Person = Person
  { firstName :: String
  , lastName  :: String
  } deriving Generic -- for the JSON instance

instance ToJSON Person
```

Now, let's teach **lucid** how to render a Person as a row in a table, and then a list of Persons as a table with a row per person.

```
-- HTML serialization of a single person
instance ToHtml Person where
  toHtml person =
    tr_ $ do
      td_ (toHtml $ firstName person)
      td_ (toHtml $ lastName person)

  -- do not worry too much about this
  toHtmlRaw = toHtml

-- HTML serialization of a list of persons
instance ToHtml [Person] where
  toHtml persons = table_ $ do
    tr_ $ do
      th_ "first name"
      th_ "last name"

  -- this just calls toHtml on each person of the list
  -- and concatenates the resulting pieces of HTML together
  foldMap toHtml persons

  toHtmlRaw = toHtml
```

We create some `Person` values and serve them as a list:

```
people :: [Person]
people =
  [ Person "Isaac" "Newton"
  , Person "Albert" "Einstein"
  ]

personAPI :: Proxy PersonAPI
personAPI = Proxy

server4 :: Server PersonAPI
server4 = return people

app2 :: Application
app2 = serve personAPI server4
```

And we're good to go:

```
$ curl http://localhost:8081/persons
[{"lastName":"Newton","firstName":"Isaac"}, {"lastName":"Einstein","firstName":"Albert"}]
↪

$ curl -H 'Accept: text/html' http://localhost:8081/persons
<table><tr><td>first name</td><td>last name</td></tr><tr><td>Isaac</td><td>Newton</td></tr><tr><td>Albert</td><td>Einstein</td></tr></table>
↪
# or just point your browser to http://localhost:8081/persons
```

1.3.6 The Handler monad

At the heart of the handlers is the monad they run in, namely a newtype `Handler` around `ExceptT ServerError IO` ([haddock documentation for ExceptT](#)). One might wonder: why this monad? The answer is that it is the simplest monad with the following properties:

- it lets us both return a successful result (using `return`) or “fail” with a descriptive error (using `throwError`);

- it lets us perform IO, which is absolutely vital since most webservices exist as interfaces to databases that we interact with in IO.

Let's recall some definitions.

```
-- from the 'mtl' package at
newtype ExceptT e m a = ExceptT (m (Either e a))
```

In short, this means that a handler of type `Handler a` is simply equivalent to a computation of type `IO (Either ServerError a)`, that is, an IO action that either returns an error or a result.

The module `Control.Monad.Except` from which `ExceptT` comes is worth looking at. Perhaps most importantly, `ExceptT` and `Handler` are instances of `MonadError`, so `throwError` can be used to return an error from your handler (whereas `return` is enough to return a success).

Most of what you'll be doing in your handlers is running some IO and, depending on the result, you might sometimes want to throw an error of some kind and abort early. The next two sections cover how to do just that.

Performing IO

Other important instances from the list above are `MonadIO m => MonadIO (ExceptT e m)`, and therefore also `MonadIO Handler` as there is a `MonadIO IO` instance. `MonadIO` is a class from the **transformers** package defined as:

```
class Monad m => MonadIO m where
  liftIO :: IO a -> m a
```

So if you want to run any kind of IO computation in your handlers, just use `liftIO`:

```
type IOAPI1 = "myfile.txt" :> Get '[JSON] FileContent

newtype FileContent = FileContent
  { content :: String }
  deriving Generic

instance ToJSON FileContent

server5 :: Server IOAPI1
server5 = do
  filecontent <- liftIO (readFile "myfile.txt")
  return (FileContent filecontent)
```

Failing, through ServerError

If you want to explicitly fail at providing the result promised by an endpoint using the appropriate HTTP status code (not found, unauthorized, etc) and some error message, all you have to do is use the `throwError` function mentioned above and provide it with the appropriate value of type `ServerError`, which is defined as:

```
data ServerError = ServerError
  { errHTTPCode      :: Int
  , errReasonPhrase  :: String
  , errBody          :: ByteString -- lazy bytestring
  , errHeaders       :: [Header]
  }
```

Many standard values are provided out of the box by the `Servant.Server` module. If you want to use these values but add a body or some headers, just use record update syntax:

```
failingHandler :: Handler ()
failingHandler = throwError myerr

where myerr :: ServerError
      myerr = err503 { errBody = "Sorry dear user." }
```

Here's an example where we return a customised 404-Not-Found error message in the response body if “myfile.txt” isn't there:

```
server6 :: Server IOAPI1
server6 = do
  exists <- liftIO (doesFileExist "myfile.txt")
  if exists
    then liftIO (readFile "myfile.txt") >>= return . FileContent
    else throwError custom404Err

where custom404Err = err404 { errBody = "myfile.txt just isn't there, please leave_
↳this server alone." }
```

Here's how that server looks in action:

```
$ curl --verbose http://localhost:8081/myfile.txt
[snip]
* Connected to localhost (127.0.0.1) port 8081 (#0)
> GET /myfile.txt HTTP/1.1
> User-Agent: curl/7.30.0
> Host: localhost:8081
> Accept: */*
>
< HTTP/1.1 404 Not Found
[snip]
myfile.txt just isn't there, please leave this server alone.

$ echo Hello > myfile.txt

$ curl --verbose http://localhost:8081/myfile.txt
[snip]
* Connected to localhost (127.0.0.1) port 8081 (#0)
> GET /myfile.txt HTTP/1.1
> User-Agent: curl/7.30.0
> Host: localhost:8081
> Accept: */*
>
< HTTP/1.1 200 OK
[snip]
< Content-Type: application/json
[snip]
{"content":"Hello\n"}
```

1.3.7 Response headers

To add headers to your response, use `addHeader`. Note that this changes the type of your API, as we can see in the following example:


```

type MyHandler = Get '[JSON] (Headers '[Header "X-An-Int" Int] User)

myHandler :: Server MyHandler
myHandler = return $ addHeader 1797 albert

```

Note that the type of `addHeader header x` is different than the type of `x`! And if you add more headers, more headers will appear in the header list:

```

type MyHeadfulHandler = Get '[JSON] (Headers '[Header "X-A-Bool" Bool, Header "X-An-
↪Int" Int] User)

myHeadfulHandler :: Server MyHeadfulHandler
myHeadfulHandler = return $ addHeader True $ addHeader 1797 albert

```

But what if your handler only *sometimes* adds a header? If you declare that your handler adds headers, and you don't add one, the return type of your handler will be different than expected. To solve this, you have to explicitly *not* add a header by using `noHeader`:

```

type MyMaybeHeaderHandler
  = Capture "withHeader" Bool :> Get '[JSON] (Headers '[Header "X-An-Int" Int] User)

myMaybeHeaderHandler :: Server MyMaybeHeaderHandler
myMaybeHeaderHandler x = return $ if x then addHeader 1797 albert
                          else noHeader albert

```

1.3.8 Serving static files

`servant-server` also provides a way to just serve the content of a directory under some path in your web API. As mentioned earlier in this document, the `Raw` combinator can be used in your APIs to mean “plug here any WAI application”. Well, `servant-server` provides a function to get a file and directory serving WAI application, namely:

```

-- exported by Servant and Servant.Server
serveDirectoryWebApp :: FilePath -> Server Raw

```

`serveDirectoryWebApp`'s argument must be a path to a valid directory.

Here's an example API that will serve some static files:

```

type StaticAPI = "static" :> Raw

```

And the server:

```

staticAPI :: Proxy StaticAPI
staticAPI = Proxy

```

```

server7 :: Server StaticAPI
server7 = serveDirectoryWebApp "static-files"

app3 :: Application
app3 = serve staticAPI server7

```

This server will match any request whose path starts with `/static` and will look for a file at the path described by the rest of the request path, inside the `static-files/` directory of the path you run the program from.

In other words: If a client requests `/static/foo.txt`, the server will look for a file at `./static-files/foo.txt`. If that file exists it'll succeed and serve the file. If it doesn't exist, the handler will fail with a 404 status

code.

`serveDirectoryWebApp` uses some standard settings that fit the use case of serving static files for most web apps. You can find out about the other options in the documentation of the `Servant.Server.StaticFiles` module.

1.3.9 Nested APIs

Let's see how you can define APIs in a modular way, while avoiding repetition. Consider this simple example:

```
type UserAPI3 = -- view the user with given userid, in JSON
  Capture "userid" Int -> Get '[JSON] User

  :<|> -- delete the user with given userid. empty response
  Capture "userid" Int -> DeleteNoContent
```

We can instead factor out the `userid`:

```
type UserAPI4 = Capture "userid" Int ->
  (   Get '[JSON] User
  :<|> DeleteNoContent
  )
```

However, you have to be aware that this has an effect on the type of the corresponding `Server`:

```
Server UserAPI3 = (Int -> Handler User)
  :<|> (Int -> Handler NoContent)

Server UserAPI4 = Int -> (   Handler User
  :<|> Handler NoContent
  )
```

In the first case, each handler receives the `userid` argument. In the latter, the whole `Server` takes the `userid` and has handlers that are just computations in `Handler`, with no arguments. In other words:

```
server8 :: Server UserAPI3
server8 = getUser :<|> deleteUser

  where getUser :: Int -> Handler User
        getUser _userid = error "...

        deleteUser :: Int -> Handler NoContent
        deleteUser _userid = error "...

-- notice how getUser and deleteUser
-- have a different type! no argument anymore,
-- the argument directly goes to the whole Server
server9 :: Server UserAPI4
server9 userid = getUser userid :<|> deleteUser userid

  where getUser :: Int -> Handler User
        getUser = error "...

        deleteUser :: Int -> Handler NoContent
        deleteUser = error "...
```

Note that there's nothing special about `Capture` that lets you “factor it out”: this can be done with any combinator. Here are a few examples of APIs with a combinator factored out for which we can write a perfectly valid `Server`.

```

-- we just factor out the "users" path fragment
type API1 = "users" :>
  (   Get '[JSON] [User] -- user listing
  :<|> Capture "userid" Int :> Get '[JSON] User -- view a particular user
  )

-- we factor out the Request Body
type API2 = ReqBody '[JSON] User :>
  (   Get '[JSON] User -- just display the same user back, don't register it
  :<|> PostNoContent -- register the user. empty response
  )

-- we factor out a Header
type API3 = Header "Authorization" Token :>
  (   Get '[JSON] SecretData -- get some secret data, if authorized
  :<|> ReqBody '[JSON] SecretData :> PostNoContent -- add some secret data, if_
↳authorized
  )

newtype Token = Token ByteString
newtype SecretData = SecretData ByteString

```

This approach lets you define APIs modularly and assemble them all into one big API type only at the end.

```

type UsersAPI =
  Get '[JSON] [User] -- list users
  :<|> ReqBody '[JSON] User :> PostNoContent -- add a user
  :<|> Capture "userid" Int :>
    ( Get '[JSON] User -- view a user
    :<|> ReqBody '[JSON] User :> PutNoContent -- update a user
    :<|> DeleteNoContent -- delete a user
    )

usersServer :: Server UsersAPI
usersServer = getUsers :<|> newUser :<|> userOperations

  where getUsers :: Handler [User]
        getUsers = error "...

        newUser :: User -> Handler NoContent
        newUser = error "...

        userOperations userid =
          viewUser userid :<|> updateUser userid :<|> deleteUser userid

        where
          viewUser :: Int -> Handler User
          viewUser = error "...

          updateUser :: Int -> User -> Handler NoContent
          updateUser = error "...

          deleteUser :: Int -> Handler NoContent
          deleteUser = error "...

```

```

type ProductsAPI =
  Get '[JSON] [Product] -- list products

```

(continues on next page)

(continued from previous page)

```

:<|> ReqBody '[JSON] Product :> PostNoContent -- add a product
:<|> Capture "productid" Int :>
  ( Get '[JSON] Product -- view a product
  :<|> ReqBody '[JSON] Product :> PutNoContent -- update a product
  :<|> DeleteNoContent -- delete a product
  )

data Product = Product { productId :: Int }

productsServer :: Server ProductsAPI
productsServer = getProducts :<|> newProduct :<|> productOperations

  where getProducts :: Handler [Product]
        getProducts = error "...

        newProduct :: Product -> Handler NoContent
        newProduct = error "...

        productOperations productid =
          viewProduct productid :<|> updateProduct productid :<|> deleteProduct_
↳productid

          where
            viewProduct :: Int -> Handler Product
            viewProduct = error "...

            updateProduct :: Int -> Product -> Handler NoContent
            updateProduct = error "...

            deleteProduct :: Int -> Handler NoContent
            deleteProduct = error "..."

```

```

type CombinedAPI = "users" :> UsersAPI
                  :<|> "products" :> ProductsAPI

server10 :: Server CombinedAPI
server10 = usersServer :<|> productsServer

```

Finally, we can realize the user and product APIs are quite similar and abstract that away:

```

-- API for values of type 'a'
-- indexed by values of type 'i'
type APIFor a i =
  Get '[JSON] [a] -- list 'a's
  :<|> ReqBody '[JSON] a :> PostNoContent -- add an 'a'
  :<|> Capture "id" i :>
    ( Get '[JSON] a -- view an 'a' given its "identifier" of type 'i'
    :<|> ReqBody '[JSON] a :> PutNoContent -- update an 'a'
    :<|> DeleteNoContent -- delete an 'a'
    )

-- Build the appropriate 'Server'
-- given the handlers of the right type.
serverFor :: Handler [a] -- handler for listing of 'a's
          -> (a -> Handler NoContent) -- handler for adding an 'a'
          -> (i -> Handler a) -- handler for viewing an 'a' given its identifier of_
↳type 'i'

```

(continues on next page)

(continued from previous page)

```

-> (i -> a -> Handler NoContent) -- updating an 'a' with given id
-> (i -> Handler NoContent) -- deleting an 'a' given its id
-> Server (APIFor a i)
serverFor = error "...
-- implementation left as an exercise. contact us on IRC
-- or the mailing list if you get stuck!

```

When your API contains the `EmptyAPI` combinator, you'll want to use `emptyServer` in the corresponding slot for your server, which will simply fail with 404 whenever a request reaches it:

```

type CombinedAPI2 = API :<|> "empty" :> EmptyAPI

server11 :: Server CombinedAPI2
server11 = server3 :<|> emptyServer

```

1.3.10 Using another monad for your handlers

Remember how `Server` turns combinators for HTTP methods into `Handler`? Well, actually, there's more to that. `Server` is actually a simple type synonym.

```

type Server api = ServerT api Handler

```

`ServerT` is the actual type family that computes the required types for the handlers that's part of the `HasServer` class. It's like `Server` except that it takes another parameter which is the monad you want your handlers to run in, or more generally the return types of your handlers. This third parameter is used for specifying the return type of the handler for an endpoint, e.g when computing `ServerT (Get '[JSON] Person) SomeMonad`. The result would be `SomeMonad Person`.

The first and main question one might have then is: how do we write handlers that run in another monad? How can we “bring back” the value from a given monad into something **servant** can understand?

Natural transformations

If we have a function that gets us from an `m a` to an `n a`, for any `a`, what do we have?

```

type (~>) m n = forall a. m a -> n a

```

For example:

```

listToMaybe' :: [] ~> Maybe
listToMaybe' = listToMaybe -- from Data.Maybe

```

Note that `servant` doesn't declare the `~>` type-alias, as the unfolded variant isn't much longer to write, as we'll see shortly.

So if you want to write handlers using another monad/type than `Handler`, say the `Reader String` monad, the first thing you have to prepare is a function:

```

readerToHandler :: Reader String a -> Handler a

```

We obviously have to run the `Reader` computation by supplying it with a `String`, like `"hi"`. We get an `a` out from that and can then just `return` it into `Handler`.

```
readerToHandler :: Reader String a -> Handler a
readerToHandler r = return (runReader r "hi")
```

We can write some simple webservice with the handlers running in `Reader String`.

```
type ReaderAPI = "a" :> Get '[JSON] Int
                :<|> "b" :> ReqBody '[JSON] Double :> Get '[JSON] Bool

readerAPI :: Proxy ReaderAPI
readerAPI = Proxy

readerServerT :: ServerT ReaderAPI (Reader String)
readerServerT = a :<|> b where
  a :: Reader String Int
  a = return 1797

  b :: Double -> Reader String Bool
  b _ = asks (== "hi")
```

We unfortunately can't use `readerServerT` as an argument of `serve`, because `serve` wants a `Server ReaderAPI`, i.e., with handlers running in `Handler`. But there's a simple solution to this.

Welcome `hoistServer`

That's right. We have just written `readerToHandler`, which is exactly what we would need to apply to all handlers to make the handlers have the right type for `serve`. Being cumbersome to do by hand, we provide a function `hoistServer` which takes a natural transformation between two parameterized types `m` and `n` and a `ServerT someapi m`, and returns a `ServerT someapi n`.

In our case, we can wrap up our little webservice by using `hoistServer readerAPI readerToHandler` on our handlers.

```
readerServer :: Server ReaderAPI
readerServer = hoistServer readerAPI readerToHandler readerServerT

app4 :: Application
app4 = serve readerAPI readerServer
```

This is the webservice in action:

```
$ curl http://localhost:8081/a
1797
$ curl http://localhost:8081/b -X GET -d '42.0' -H 'Content-Type: application/json'
true
```

An arrow is a reader too.

In previous versions of `servant` we had an `enter` to do what `hoistServer` does now. `enter` had an ambitious design goals, but was problematic in practice.

One problematic situation was when the source monad was `(->) r`, yet it's handy in practice, because `(->) r` is isomorphic to `Reader r`.

We can rewrite the previous example without `Reader`:

```

funServerT :: ServerT ReaderAPI ((->) String)
funServerT = a :<|> b where
  a :: String -> Int
  a _ = 1797

  -- unfortunately, we cannot make `String` the first argument.
  b :: Double -> String -> Bool
  b _ s = s == "hi"

funToHandler :: (String -> a) -> Handler a
funToHandler f = return (f "hi")

app5 :: Application
app5 = serve readerAPI (hoistServer readerAPI funToHandler funServerT)

```

1.3.11 Streaming endpoints

We can create endpoints that don't just give back a single result, but give back a *stream* of results, served one at a time. Stream endpoints only provide a single content type, and also specify what framing strategy is used to delineate the results. To serve these results, we need to give back a stream producer. Adapters can be written to *Pipes*, *Conduit* and the like, or written directly as `SourceIO`s. `SourceIO` builds upon servant's own `SourceT` stream type (it's simpler than *Pipes* or *Conduit*). The API of a streaming endpoint needs to explicitly specify which sort of generator it produces. Note that the generator itself is returned by a `Handler` action, so that additional IO may be done in the creation of one.

```

type StreamAPI = "userStream" :> StreamGet NewlineFraming JSON (SourceIO User)
streamAPI :: Proxy StreamAPI
streamAPI = Proxy

streamUsers :: SourceIO User
streamUsers = source [isaac, albert, albert]

app6 :: Application
app6 = serve streamAPI (return streamUsers)

```

This simple application returns a stream of `User` values encoded in JSON format, with each value separated by a newline. In this case, the stream will consist of the value of `isaac`, followed by the value of `albert`, then the value of `albert` a second time. Importantly, the stream is written back as results are produced, rather than all at once. This means first that results are delivered when they are available, and second, that if an exception interrupts production of the full stream, nonetheless partial results have already been written back.

1.3.12 Conclusion

You're now equipped to write webservers/web-applications using **servant**. The rest of this document focuses on **servant-client**, **servant-js** and **servant-docs**.

1.4 Querying an API

While defining handlers that *serve* an API has a lot to it, querying an API is simpler: we do not care about what happens inside the webserver, we just need to know how to talk to it and get a response back. That said, we usually have to write the querying functions by hand because the structure of the API isn't a first class citizen and can't be inspected to generate the client-side functions.

servant however has a way to inspect APIs, because APIs are just Haskell types and (GHC) Haskell lets us do quite a few things with types. In the same way that we look at an API type to deduce the types the handlers should have, we can inspect the structure of the API to *derive* Haskell functions that take one argument for each occurrence of `Capture`, `ReqBody`, `QueryParam` and friends (see [the tutorial introduction](#) for an overview). By *derive*, we mean that there's no code generation involved - the functions are defined just by the structure of the API type.

The source for this tutorial section is a literate Haskell file, so first we need to have some language extensions and imports:

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE TypeOperators #-}

module Client where

import Data.Aeson
import Data.Proxy
import GHC.Generics
import Network.HTTP.Client (newManager, defaultManagerSettings)
import Servant.API
import Servant.Client
import Servant.Types.SourceT (foreach)

import qualified Servant.Client.Streaming as S
```

Also, we need examples for some domain specific data types:

```
data Position = Position
  { xCoord :: Int
  , yCoord :: Int
  } deriving (Show, Generic)

instance FromJSON Position

newtype HelloMessage = HelloMessage { msg :: String }
  deriving (Show, Generic)

instance FromJSON HelloMessage

data ClientInfo = ClientInfo
  { clientName :: String
  , clientEmail :: String
  , clientAge :: Int
  , clientInterestedIn :: [String]
  } deriving Generic

instance ToJSON ClientInfo

data Email = Email
  { from :: String
  , to :: String
  , subject :: String
  , body :: String
  } deriving (Show, Generic)

instance FromJSON Email
```

Enough chitchat, let's see an example. Consider the following API type from the previous section:


```
type API = "position" :> Capture "x" Int :> Capture "y" Int :> Get '[JSON] Position
          :<|> "hello" :> QueryParam "name" String :> Get '[JSON] HelloMessage
          :<|> "marketing" :> ReqBody '[JSON] ClientInfo :> Post '[JSON] Email
```

What we are going to get with **servant-client** here is three functions, one to query each endpoint:

```
position :: Int -- ^ value for "x"
          -> Int -- ^ value for "y"
          -> ClientM Position

hello :: Maybe String -- ^ an optional value for "name"
       -> ClientM HelloMessage

marketing :: ClientInfo -- ^ value for the request body
          -> ClientM Email
```

Each function makes available as an argument any value that the response may depend on, as evidenced in the API type. How do we get these functions? By calling the function `client`. It takes one argument:

- a `Proxy` to your API,

```
api :: Proxy API
api = Proxy

position :<|> hello :<|> marketing = client api
```

`client api` returns client functions for our *entire* API, combined with `:<|>`, which we can pattern match on as above. You could say `client` “calculates” the correct type and number of client functions for the API type it is given (via a `Proxy`), as well as their implementations.

If you have an `EmptyAPI` in your API, **servant-client** will hand you a value of type `EmptyClient` in the corresponding slot, where `data EmptyClient = EmptyClient`, as a way to indicate that you can’t do anything useful with it.

```
type API' = API :<|> EmptyAPI

api' :: Proxy API'
api' = Proxy

(position' :<|> hello' :<|> marketing') :<|> EmptyClient = client api'
```

```
-- | URI scheme to use
data Scheme =
    Http -- ^ http://
  | Https -- ^ https://
  deriving

-- | Simple data type to represent the target of HTTP requests
-- for servant's automatically-generated clients.
data BaseUrl = BaseUrl
  { baseUrlScheme :: Scheme -- ^ URI scheme to use
  , baseUrlHost :: String -- ^ host (eg "haskell.org")
  , baseUrlPort :: Int -- ^ port (eg 80)
  , baseUrlPath :: String -- ^ path (eg "/a/b/c")
  }
```

That’s it. Let’s now write some code that uses our client functions.

```
queries :: ClientM (Position, HelloMessage, Email)
queries = do
  pos <- position 10 10
  message <- hello (Just "servant")
  em <- marketing (ClientInfo "Alp" "alp@foo.com" 26 ["haskell", "mathematics"])
  return (pos, message, em)

run :: IO ()
run = do
  manager' <- newManager defaultManagerSettings
  res <- runClientM queries (mkClientEnv manager' (BaseUrl Http "localhost" 8081 ""))
  case res of
    Left err -> putStrLn $ "Error: " ++ show err
    Right (pos, message, em) -> do
      print pos
      print message
      print em
```

Here's the output of the above code running against the appropriate server:

```
Position {xCoord = 10, yCoord = 10}
HelloMessage {msg = "Hello, servant"}
Email {from = "great@company.com", to = "alp@foo.com", subject = "Hey Alp, we miss_
↳you!", body = "Hi Alp,\n\nSince you've recently turned 26, have you checked out our_
↳latest haskell, mathematics products? Give us a visit!"}
```

The types of the arguments for the functions are the same as for (server-side) request handlers.

1.4.1 Changing the monad the client functions live in

Just like `hoistServer` allows us to change the monad in which request handlers of a web application live, we also have `hoistClient` for changing the monad in which *client functions* live. Consider the following trivial API:

```
type HoistClientAPI = Get '[JSON] Int :<|> Capture "n" Int :> Post '[JSON] Int

hoistClientAPI :: Proxy HoistClientAPI
hoistClientAPI = Proxy
```

We already know how to derive client functions for this API, and as we have seen above they all return results in the `ClientM` monad when using `servant-client`. However, `ClientM` is rarely (or never) the actual monad we need to use the client functions in. Sometimes we need to run them in `IO`, sometimes in a custom monad stack. `hoistClient` is a very simple solution to the problem of “changing” the monad the clients run in.

```
hoistClient
  :: HasClient ClientM api    -- we need a valid API
  => Proxy api                -- a Proxy to the API type
  -> (forall a. m a -> n a)   -- a "monad conversion function" (natural transformation)
  -> Client m api             -- clients in the source monad
  -> Client n api             -- result: clients in the target monad
```

The “conversion function” argument above, just like the ones given to `hoistServer`, must be able to turn an `m a` into an `n a` for any choice of type `a`.

Let's see this in action on our example. We first derive our client functions as usual, with all of them returning a result in `ClientM`.

```

getIntClientM :: ClientM Int
postIntClientM :: Int -> ClientM Int
getIntClientM :<|> postIntClientM = client hoistClientAPI

```

And we finally decide that we want the handlers to run in IO instead, by “post-applying” `runClientM` to a fixed client environment.

```

-- our conversion function has type: forall a. ClientM a -> IO a
-- the result has type:
-- Client IO HoistClientAPI = IO Int :<|> (Int -> IO Int)
getClientM :: ClientEnv -> Client IO HoistClientAPI
getClientM clientEnv
  = hoistClient hoistClientAPI
    ( fmap (either (error . show) id)
      . flip runClientM clientEnv
      )
    (client hoistClientAPI)

```

1.4.2 Querying Streaming APIs.

Consider the following streaming API type:

```

type StreamAPI = "positionStream" :> StreamGet NewlineFraming JSON (SourceIO Position)

```

Note that we use the same `SourceIO` type as on the server-side (this is different from `servant-0.14`). However, we have to use different client, `Servant.Client.Streaming`, which can stream (but has different API).

In any case, here’s how we write a function to query our API:

```

streamAPI :: Proxy StreamAPI
streamAPI = Proxy

posStream :: S.ClientM (SourceIO Position)
posStream = S.client streamAPI

```

We’ll get back a `SourceIO Position`. Instead of `runClientM`, the streaming client provides `withClientM`: the underlying HTTP connection is open only until the inner functions exits. Inside the block we can e.g just print out all elements from a `SourceIO`, to give some idea of how to work with them.

```

printSourceIO :: Show a => ClientEnv -> S.ClientM (SourceIO a) -> IO ()
printSourceIO env c = S.withClientM c env $ \e -> case e of
  Left err -> putStrLn $ "Error: " ++ show err
  Right rs -> foreach fail print rs

```

The stream is parsed and provided incrementally. So the above loop prints out each result as soon as it is received on the stream, rather than waiting until they are all available to print them at once.

You now know how to use **servant-client**!

1.5 Generating Javascript functions to query an API

We will now see how **servant** lets you turn an API type into javascript functions that you can call to query a webservice.

For this, we will consider a simple page divided in two parts. At the top, we will have a search box that lets us search in a list of Haskell books by author/title with a list of results that gets updated every time we enter or remove a character,

while at the bottom we will be able to see the classical [probabilistic method to approximate pi](#), using a webservice to get random points. Finally, we will serve an HTML file along with a couple of Javascript files, among which one that's automatically generated from the API type and which will provide ready-to-use functions to query your API.

The source for this tutorial section is a literate haskell file, so first we need to have some language extensions and imports:

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE OverloadedStrings #-}
{-# LANGUAGE TypeOperators #-}

module Javascript where

import Control.Monad.IO.Class
import Data.Aeson
import Data.Proxy
import Data.Text as T (Text)
import Data.Text.IO as T (writeFile, readFile)
import GHC.Generics
import Language.Javascript.JQuery
import Network.Wai
import Network.Wai.Handler.Warp
import qualified Data.Text as T
import Servant
import Servant.JS
import System.Random
```

Now let's have the API type(s) and the accompanying datatypes.

```
type API = "point"  => Get '[JSON] Point
         :<|> "books" => QueryParam "q" Text => Get '[JSON] (Search Book)

type API' = API :<|> Raw

data Point = Point
  { x :: Double
  , y :: Double
  } deriving Generic

instance ToJSON Point

data Search a = Search
  { query   :: Text
  , results :: [a]
  } deriving Generic

mkSearch :: Text -> [a] -> Search a
mkSearch = Search

instance ToJSON a => ToJSON (Search a)

data Book = Book
  { author :: Text
  , title  :: Text
  , year   :: Int
  } deriving Generic
```

(continues on next page)

(continued from previous page)

```
instance ToJSON Book

book :: Text -> Text -> Int -> Book
book = Book
```

We need a “book database”. For the purpose of this guide, let’s restrict ourselves to the following books.

```
books :: [Book]
books =
  [ book "Paul Hudak" "The Haskell School of Expression: Learning Functional
↳ Programming through Multimedia" 2000
  , book "Bryan O'Sullivan, Don Stewart, and John Goerzen" "Real World Haskell" 2008
  , book "Miran Lipovača" "Learn You a Haskell for Great Good!" 2011
  , book "Graham Hutton" "Programming in Haskell" 2007
  , book "Simon Marlow" "Parallel and Concurrent Programming in Haskell" 2013
  , book "Richard Bird" "Introduction to Functional Programming using Haskell" 1998
  ]
```

Now, given an optional search string `q`, we want to perform a case insensitive search in that list of books. We’re obviously not going to try and implement the best possible algorithm, this is out of scope for this tutorial. The following simple linear scan will do, given how small our list is.

```
searchBook :: Monad m => Maybe Text -> m (Search Book)
searchBook Nothing = return (mkSearch "" books)
searchBook (Just q) = return (mkSearch q books')

  where books' = filter (\b -> q' `T.isInfixOf` T.toLower (author b)
                        || q' `T.isInfixOf` T.toLower (title b)
                        )
                        books
        q' = T.toLower q
```

We also need an endpoint that generates random points (x, y) with $-1 \leq x, y \leq 1$. The code below uses `random`’s `System.Random`.

```
randomPoint :: MonadIO m => m Point
randomPoint = liftIO . getStdRandom $ \g ->
  let (rx, g') = randomR (-1, 1) g
      (ry, g'') = randomR (-1, 1) g'
  in (Point rx ry, g'')
```

If we add static file serving, our server is now complete.

```
api :: Proxy API
api = Proxy

api' :: Proxy API'
api' = Proxy

server :: Server API
server = randomPoint
      :<|> searchBook

server' :: Server API'
server' = server
       :<|> serveDirectoryFileServer "static"
```

(continues on next page)

(continued from previous page)

```
app :: Application
app = serve api' server'

main :: IO ()
main = run 8000 app
```

Why two different API types, proxies and servers though? Simply because we don't want to generate javascript functions for the `Raw` part of our API type, so we need a `Proxy` for our API type `API'` without its `Raw` endpoint.

The `EmptyAPI` combinator needs no special treatment as it generates no Javascript functions: an empty API has no endpoints to access.

Very similarly to how one can derive haskell functions, we can derive the javascript with just a simple function call to `jsForAPI` from `Servant.JS`.

```
apiJS1 :: Text
apiJS1 = jsForAPI api jquery
```

This `Text` contains 2 Javascript functions, 'getPoint' and 'getBooks':

```
var getPoint = function (onSuccess, onError)
{
  $.ajax(
    { url: '/point'
      , success: onSuccess
      , error: onError
      , type: 'GET'
    });
}

var getBooks = function (q, onSuccess, onError)
{
  $.ajax(
    { url: '/books' + '?q=' + encodeURIComponent (q)
      , success: onSuccess
      , error: onError
      , type: 'GET'
    });
}
```

We created a directory `static` that contains two static files: `index.html`, which is the entrypoint to our little web application; and `ui.js`, which contains some hand-written javascript. This javascript code assumes the two generated functions `getPoint` and `getBooks` in scope. Therefore we need to write the generated javascript into a file:

```
writeJSFiles :: IO ()
writeJSFiles = do
  T.writeFile "static/api.js" apiJS1
  jq <- T.readFile =<< Language.Javascript.JQuery.file
  T.writeFile "static/jq.js" jq
```

(We're also writing the jquery library into a file, as it's also used by `ui.js`.) `static/api.js` will be included in `index.html` and the two generated functions will therefore be available in `ui.js`.

And we're good to go. You can start the `main` function of this file and go to `http://localhost:8000/`. Start typing in the name of one of the authors in our database or part of a book title, and check out how long it takes to approximate pi using the method mentioned above.

1.5.1 Customizations

Instead of calling `jquery`, you can call its variant `jqueryWith`. Here are the type definitions

```
jquery :: JavaScriptGenerator
jqueryWith :: CommonGeneratorOptions -> JavaScriptGenerator
```

The `CommonGeneratorOptions` will let you define different behaviors to change how functions are generated. Here is the definition of currently available options:

```
data CommonGeneratorOptions = CommonGeneratorOptions
{
  -- | function generating function names
  functionNameBuilder :: FunctionName -> Text
  -- | name used when a user wants to send the request body (to let you redefine it)
  , requestBody :: Text
  -- | name of the callback parameter when the request was successful
  , successCallback :: Text
  -- | name of the callback parameter when the request reported an error
  , errorCallback :: Text
  -- | namespace on which we define the js function (empty means local var)
  , moduleName :: Text
  -- | a prefix that should be prepended to the URL in the generated JS
  , urlPrefix :: Text
}
```

This pattern is available with all supported backends, and default values are provided.

1.5.2 Vanilla support

If you don't use JQuery for your application, you can reduce your dependencies to simply use the `XMLHttpRequest` object from the standard API.

Use the same code as before but simply replace the previous `apiJS` with the following one:

```
apiJS2 :: Text
apiJS2 = jsForAPI api vanillaJS
```

The rest is *completely* unchanged.

The output file is a bit different, but it has the same parameters,

```
var getPoint = function(onSuccess, onError)
{
  var xhr = new XMLHttpRequest();
  xhr.open('GET', '/point', true);
  xhr.setRequestHeader("Accept", "application/json");
  xhr.onreadystatechange = function (e) {
    if (xhr.readyState == 4) {
      if (xhr.status == 204 || xhr.status == 205) {
        onSuccess();
      } else if (xhr.status >= 200 && xhr.status < 300) {
        var value = JSON.parse(xhr.responseText);
        onSuccess(value);
      } else {
```

(continues on next page)

(continued from previous page)

```
        var value = JSON.parse(xhr.responseText);
        onError(value);
    }
}
xhr.send(null);
}

var getBooks = function(q, onSuccess, onError)
{
    var xhr = new XMLHttpRequest();
    xhr.open('GET', '/books' + '?q=' + encodeURIComponent(q), true);
    xhr.setRequestHeader("Accept", "application/json");
    xhr.onreadystatechange = function (e) {
        if (xhr.readyState == 4) {
            if (xhr.status == 204 || xhr.status == 205) {
                onSuccess();
            } else if (xhr.status >= 200 && xhr.status < 300) {
                var value = JSON.parse(xhr.responseText);
                onSuccess(value);
            } else {
                var value = JSON.parse(xhr.responseText);
                onError(value);
            }
        }
    }
    xhr.send(null);
}
```

And that's all, your web service can of course be accessible from those two clients at the same time!

1.5.3 Axios support

Simple usage

If you use Axios library for your application, we support that too!

Use the same code as before but simply replace the previous `apiJS` with the following one:

```
apiJS3 :: Text
apiJS3 = jsForAPI api $ axios defAxiosOptions
```

The rest is *completely* unchanged.

The output file is a bit different,

```
var getPoint = function()
{
    return axios({ url: '/point'
        , method: 'get'
    });
}
```

(continues on next page)

(continued from previous page)

```

var getBooks = function(q)
{
  return axios({ url: '/books' + '?q=' + encodeURIComponent(q)
    , method: 'get'
  });
}

```

Caution: In order to support the promise style of the API, there are no `onSuccess` nor `onError` callback functions.

Defining Axios configuration

Axios lets you define a ‘configuration’ to determine the behavior of the program when the AJAX request is sent.

We mapped this into a configuration

```

data AxiosOptions = AxiosOptions
{ -- | indicates whether or not cross-site Access-Control requests
  -- should be made using credentials
  withCredentials :: !Bool
  -- | the name of the cookie to use as a value for xsrf token
  , xsrfCookieName :: !(Maybe Text)
  -- | the name of the header to use as a value for xsrf token
  , xsrfHeaderName :: !(Maybe Text)
}

```

1.5.4 Angular support

Simple usage

You can apply the same procedure as with `vanillaJS` and `jquery`, and generate top level functions.

The difference is that `angular` Generator always takes an argument.

```

apiJS4 :: Text
apiJS4 = jsForAPI api $ angular defAngularOptions

```

The generated code will be a bit different than previous generators. An extra argument `$http` will be added to let Angular magical Dependency Injector operate.

Caution: In order to support the promise style of the API, there are no `onSuccess` nor `onError` callback functions.

```

var getPoint = function($http)
{
  return $http(
    { url: '/point'
    , method: 'GET'
  });
}

var getBooks = function($http, q)
{
  return $http(

```

(continues on next page)

(continued from previous page)

```
{ url: '/books' + '?q=' + encodeURIComponent(q)
, method: 'GET'
});
}
```

You can then build your controllers easily

```
app.controller("MyController", function($http) {
  this.getPoint = getPoint($http)
  .success(/* Do something */)
  .error(/* Report error */);

  this.getPoint = getBooks($http, q)
  .success(/* Do something */)
  .error(/* Report error */);
});
```

Service generator

You can also generate automatically a service to wrap the whole API as a single Angular service:

```
app.service('MyService', function($http) {
  return ({
    postCounter: function()
    {
      return $http(
        { url: '/counter'
        , method: 'POST'
        });
    },
    getCounter: function()
    {
      return $http(
        { url: '/books' + '?q=' + encodeURIComponent(q), true);
        , method: 'GET'
        });
    }
  });
});
```

To do so, you just have to use an alternate generator.

```
apiJS5 :: Text
apiJS5 = jsForAPI api $ angularService defAngularOptions
```

Again, it is possible to customize some portions with the options.

```
data AngularOptions = AngularOptions
  { -- | When generating code with wrapInService, name of the service to generate,
  ↪default is 'app'
  serviceName :: Text
  , -- | beginning of the service definition
  prologue :: Text -> Text -> Text
  , -- | end of the service definition
```

(continues on next page)

(continued from previous page)

```
epilogue :: Text
}
```

1.5.5 Custom function name builder

Servant comes with three name builders included:

- camelCase (the default)
- concatCase
- snakeCase

Keeping the JQuery as an example, let's see the impact:

```
apiJS6 :: Text
apiJS6 = jsForAPI api $ jqueryWith defCommonGeneratorOptions { functionNameBuilder=
↳snakeCase }
```

This Text contains 2 Javascript functions:

```
var get_point = function (onSuccess, onError)
{
  $.ajax(
    { url: '/point'
      , success: onSuccess
      , error: onError
      , type: 'GET'
    });
}

var get_books = function (q, onSuccess, onError)
{
  $.ajax(
    { url: '/books' + '?q=' + encodeURIComponent (q)
      , success: onSuccess
      , error: onError
      , type: 'GET'
    });
}
```

1.6 Documenting an API

The source for this tutorial section is a literate haskell file, so first we need to have some language extensions and imports:

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE FlexibleInstances #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE OverloadedStrings #-}
{-# LANGUAGE TypeOperators #-}
{-# OPTIONS_GHC -fno-warn-orphans #-}
```

(continues on next page)

(continued from previous page)

```

module Docs where

import Data.ByteString.Lazy (ByteString)
import Data.Proxy
import Data.Text.Lazy.Encoding (encodeUtf8)
import Data.Text.Lazy (pack)
import Network.HTTP.Types
import Network.Wai
import Servant.API
import Servant.Docs
import Servant.Server
import Web.FormUrlEncoded(FromForm(..), ToForm(..))

```

And we'll import some things from one of our earlier modules (Serving an API):

```

import Server (Email(..), ClientInfo(..), Position(..), HelloMessage(..),
              server3, emailForClient)

```

Like client function generation, documentation generation amounts to inspecting the API type and extracting all the data we need to then present it in some format to users of your API.

This time however, we have to assist **servant**. While it is able to deduce a lot of things about our API, it can't magically come up with descriptions of the various pieces of our APIs that are human-friendly and explain what's going on "at the business-logic level". A good example to study for documentation generation is our webservice with the /position, /hello and /marketing endpoints from earlier:

```

type ExampleAPI = "position" :> Capture "x" Int :> Capture "y" Int :> Get '[JSON]_
  ↳Position
    :<|> "hello" :> QueryParam "name" String :> Get '[JSON] HelloMessage
    :<|> "marketing" :> ReqBody '[JSON] ClientInfo :> Post '[JSON] Email

exampleAPI :: Proxy ExampleAPI
exampleAPI = Proxy

```

While **servant** can see e.g. that there are 3 endpoints and that the response bodies will be in JSON, it doesn't know what influence the captures, parameters, request bodies and other combinators have on the webservice. This is where some manual work is required.

For every capture, request body, response body, query param, we have to give some explanations about how it influences the response, what values are possible and the likes. Here's how it looks like for the parameters we have above.

```

instance ToCapture (Capture "x" Int) where
  toCapture _ =
    DocCapture "x" -- name
      "(integer) position on the x axis" -- description

instance ToCapture (Capture "y" Int) where
  toCapture _ =
    DocCapture "y" -- name
      "(integer) position on the y axis" -- description

instance ToSample Position where
  toSamples _ = singleSample (Position 3 14) -- example of output

instance ToParam (QueryParam "name" String) where

```

(continues on next page)

(continued from previous page)

```

toParam _ =
  DocQueryParam "name" -- name
                ["Alp", "John Doe", "..."] -- example of values (not necessarily_
↳exhaustive)
                "Name of the person to say hello to." -- description
                Normal -- Normal, List or Flag

instance ToSample HelloMessage where
  toSamples _ =
    [ ("When a value is provided for 'name'", HelloMessage "Hello, Alp")
    , ("When 'name' is not specified", HelloMessage "Hello, anonymous coward")
    ]
    -- multiple examples to display this time

ci :: ClientInfo
ci = ClientInfo "Alp" "alp@foo.com" 26 ["haskell", "mathematics"]

instance ToSample ClientInfo where
  toSamples _ = singleSample ci

instance ToSample Email where
  toSamples _ = singleSample (emailForClient ci)

```

Types that are used as request or response bodies have to instantiate the `ToSample` typeclass which lets you specify one or more examples of values. `Captures` and `QueryParams` have to instantiate their respective `ToCapture` and `ToParam` classes and provide a name and some information about the concrete meaning of that argument, as illustrated in the code above. The `EmptyAPI` combinator needs no special treatment as it generates no documentation: an empty API has no endpoints to document.

With all of this, we can derive docs for our API.

```

apiDocs :: API
apiDocs = docs exampleAPI

```

API is a type provided by **servant-docs** that stores all the information one needs about a web API in order to generate documentation in some format. Out of the box, **servant-docs** only provides a pretty documentation printer that outputs **Markdown**, but the **servant-pandoc** package can be used to target many useful formats.

servant's markdown pretty printer is a function named `markdown`.

```

markdown :: API -> String

```

That lets us see what our API docs look like in markdown, by looking at `markdown apiDocs`.

```

## GET /hello

#### GET Parameters:

- name
  - **Values**: *Alp, John Doe, ...*
  - **Description**: Name of the person to say hello to.

#### Response:

- Status code 200
- Headers: []

```

(continues on next page)

```

- Supported content types are:
  - `application/json;charset=utf-8`
  - `application/json`

- When a value is provided for 'name' (`application/json;charset=utf-8`, `application/
↪json`):
  ```javascript
{"msg":"Hello, Alp"}
  ```

- When 'name' is not specified (`application/json;charset=utf-8`, `application/json`):
  ```javascript
{"msg":"Hello, anonymous coward"}
  ```

## POST /marketing

#### Request:

- Supported content types are:
  - `application/json;charset=utf-8`
  - `application/json`

- Example (`application/json;charset=utf-8`, `application/json`):
  ```javascript
{"clientAge":26,"clientEmail":"alp@foo.com","clientName":"Alp","clientInterestedIn":[
↪"haskell","mathematics"]}
  ```

#### Response:

- Status code 200
- Headers: []

- Supported content types are:
  - `application/json;charset=utf-8`
  - `application/json`

- Example (`application/json;charset=utf-8`, `application/json`):
  ```javascript
{"subject":"Hey Alp, we miss you!","body":"Hi Alp,\n\nSince you've recently turned 26,
↪ have you checked out our latest haskell, mathematics products? Give us a visit!",
↪ "to":"alp@foo.com","from":"great@company.com"}
  ```

## GET /position/:x/:y

#### Captures:

```

(continues on next page)

(continued from previous page)

```

- *x*: (integer) position on the x axis
- *y*: (integer) position on the y axis

#### Response:

- Status code 200
- Headers: []

- Supported content types are:
  - `application/json;charset=utf-8`
  - `application/json`

- Example (`application/json;charset=utf-8`, `application/json`):

  ```javascript
 {"yCoord":14,"xCoord":3}
  ```

```

However, we can also add one or more introduction sections to the document. We just need to tweak the way we generate apiDocs. We will also convert the content to a lazy ByteString since this is what **wai** expects for Raw endpoints.

```

docsBS :: ByteString
docsBS = encodeUtf8
        . pack
        . markdown
        $ docsWithIntros [intro] exampleAPI

where intro = DocIntro "Welcome" ["This is our super webservice's API.", "Enjoy!"]

```

docsWithIntros just takes an additional parameter, a list of DocIntros that must be displayed before any endpoint docs.

More customisation can be done with the markdownWith function, which allows customising some of the parameters used when generating Markdown. The most obvious of these is how to handle when a request or response body has multiple content types. For example, if we make a slight change to the /marketing endpoint of our API so that the request body can also be encoded as a form:

```

type ExampleAPI2 = "position"  => Capture "x" Int  => Capture "y" Int  => Get '[JSON]
->Position
    :<|> "hello"  => QueryParam "name" String => Get '[JSON] HelloMessage
    :<|> "marketing" => ReqBody '[JSON, FormUrlEncoded] ClientInfo => Post '[JSON]
->Email

instance ToForm ClientInfo
instance FromForm ClientInfo

exampleAPI2 :: Proxy ExampleAPI2
exampleAPI2 = Proxy

api2Docs :: API
api2Docs = docs exampleAPI2

```

The relevant output of markdown api2Docs is now:

```
#### Request:

- Supported content types are:

  - `application/json;charset=utf-8`
  - `application/json`
  - `application/x-www-form-urlencoded`

- Example (`application/json;charset=utf-8`, `application/json`):

  ```javascript
 {"clientAge":26,"clientEmail":"alp@foo.com","clientName":"Alp","clientInterestedIn":["
 ↪ "haskell","mathematics"]}]
  ```

- Example (`application/x-www-form-urlencoded`):

  ```
 clientAge=26&clientEmail=alp%40foo.com&clientName=Alp&clientInterestedIn=haskell&
 ↪ clientInterestedIn=mathematics
  ```
```

If, however, you don't want the extra example encoding shown, then you can use `markdownWith` (`defRenderingOptions & requestExamples .~ FirstContentType`) to get behaviour identical to `markdown apiDocs`.

We can now serve the API *and* the API docs with a simple server.

```
type DocsAPI = ExampleAPI :<|> Raw

api :: Proxy DocsAPI
api = Proxy

server :: Server DocsAPI
server = Server.server3 :<|> Tagged serveDocs where
  serveDocs _ respond =
    respond $ responseLBS ok200 [plain] docsBS
  plain = ("Content-Type", "text/plain")

app :: Application
app = serve api server
```

And if you spin up this server and request anything else than `/position`, `/hello` and `/marketing`, you will see the API docs in markdown. This is because `serveDocs` is attempted if the 3 other endpoints don't match and systematically succeeds since its definition is to just return some fixed bytestring with the `text/plain` content type.

1.7 Authentication in Servant

Once you've established the basic routes and semantics of your API, it's time to consider protecting parts of it. Authentication and authorization are broad and nuanced topics; as servant began to explore this space we started small with one of HTTP's earliest authentication schemes: [Basic Authentication](#).

Servant 0.5 shipped with out-of-the-box support for Basic Authentication. However, we recognize that every web application is its own beautiful snowflake and are offering experimental support for generalized or ad-hoc authentication.

In this tutorial we'll build two APIs. One protecting certain routes with Basic Authentication and another protecting the same routes with a custom, in-house authentication scheme.

1.7.1 Basic Authentication

When protecting endpoints with basic authentication, we need to specify two items:

1. The **realm** of authentication as per the Basic Authentication spec.
2. The datatype returned by the server after authentication is verified. This is usually a `User` or `Customer` datatype.

With those two items in mind, *servant* provides the following combinator:

```
data BasicAuth (realm :: Symbol) (userData :: *)
```

You can use this combinator to protect an API as follows:

```
{-# LANGUAGE DataKinds           #-}
{-# LANGUAGE DeriveGeneric       #-}
{-# LANGUAGE FlexibleContexts     #-}
{-# LANGUAGE FlexibleInstances    #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE OverloadedStrings   #-}
{-# LANGUAGE ScopedTypeVariables  #-}
{-# LANGUAGE TypeFamilies        #-}
{-# LANGUAGE TypeOperators       #-}
{-# LANGUAGE UndecidableInstances #-}

module Authentication where

import Data.Aeson                (ToJSON)
import Data.ByteString           (ByteString)
import Data.Map                  (Map, fromList)
import qualified Data.Map        as Map
import Data.Proxy                (Proxy (Proxy))
import Data.Text                 (Text)
import GHC.Generics              (Generic)
import Network.Wai               (Request, requestHeaders)
import Network.Wai.Handler.Warp (run)
import Servant.API               ((:<|>) ((:<|>)), (:>), BasicAuth,
                                Get, JSON)
import Servant.API.BasicAuth     (BasicAuthData (BasicAuthData))
import Servant.API.Experimental.Auth (AuthProtect)
import Servant                   (throwError)
import Servant.Server            (BasicAuthCheck (BasicAuthCheck),
                                BasicAuthResult ( Authorized
                                                , Unauthorized
                                                ),
                                Context ((:.), EmptyContext),
                                err401, err403, errBody, Server,
                                serveWithContext, Handler)
import Servant.Server.Experimental.Auth (AuthHandler, AuthServerData,
                                        mkAuthHandler)
import Servant.Server.Experimental.Auth ()
import Web.Cookie                 (parseCookies)

-- | private data that needs protection
```

(continues on next page)

```

newtype PrivateData = PrivateData { ssshhh :: Text }
  deriving (Eq, Show, Generic)

instance ToJSON PrivateData

-- | public data that anyone can use.
newtype PublicData = PublicData { somedata :: Text }
  deriving (Eq, Show, Generic)

instance ToJSON PublicData

-- | A user we'll grab from the database when we authenticate someone
newtype User = User { userName :: Text }
  deriving (Eq, Show)

-- | a type to wrap our public api
type PublicAPI = Get '[JSON] [PublicData]

-- | a type to wrap our private api
type PrivateAPI = Get '[JSON] PrivateData

-- | our API
type BasicAPI = "public"  => PublicAPI
               :<|> "private" => BasicAuth "foo-realm" User => PrivateAPI

-- | a value holding a proxy of our API type
basicAuthApi :: Proxy BasicAPI
basicAuthApi = Proxy

```

You can see that we've prefixed our public API with "public" and our private API with "private." Additionally, the private parts of our API use the `BasicAuth` combinator to protect them under a Basic Authentication scheme (the realm for this authentication is "foo-realm").

Unfortunately we're not done. When someone makes a request to our "private" API, we're going to need to provide to servant the logic for validating usernames and passwords. This adds a certain conceptual wrinkle in servant's design that we'll briefly discuss. If you want the **TL;DR**: we supply a lookup function to servant's new `Context` primitive.

Until now, all of servant's API combinators extracted information from a request or dictated the structure of a response (e.g. a `Capture` param is pulled from the request path). Now consider an API resource protected by basic authentication. Once the required `WWW-Authenticate` header is checked, we need to verify the username and password. But how? One solution would be to force an API author to provide a function of type `BasicAuthData -> Handler User` and servant should use this function to authenticate a request. Unfortunately this didn't work prior to 0.5 because all of servant's machinery was engineered around the idea that each combinator can extract information from only the request. We cannot extract the function `BasicAuthData -> Handler User` from a request! Are we doomed?

Servant 0.5 introduced `Context` to handle this. The type machinery is beyond the scope of this tutorial, but the idea is simple: provide some data to the `serve` function, and that data is propagated to the functions that handle each combinator. Using `Context`, we can supply a function of type `BasicAuthData -> Handler User` to the `BasicAuth` combinator handler. This will allow the handler to check authentication and return a `User` to downstream handlers if successful.

In practice we wrap `BasicAuthData -> Handler User` into a slightly different function to better capture the semantics of basic authentication:

```
-- | The result of authentication/authorization
data BasicAuthResult usr
  = Unauthorized
  | BadPassword
  | NoSuchUser
  | Authorized usr
  deriving (Eq, Show, Read, Generic, Typeable, Functor)

-- | Datatype wrapping a function used to check authentication.
newtype BasicAuthCheck usr = BasicAuthCheck
  { unBasicAuthCheck :: BasicAuthData
    -> IO (BasicAuthResult usr)
  }
  deriving (Generic, Typeable, Functor)
```

We now use this datatype to supply servant with a method to authenticate requests. In this simple example the only valid username and password is "servant" and "server", respectively, but in a real, production application you might do some database lookup here.

```
-- | 'BasicAuthCheck' holds the handler we'll use to verify a username and password.
authCheck :: BasicAuthCheck User
authCheck =
  let check (BasicAuthData username password) =
        if username == "servant" && password == "server"
        then return (Authorized (User "servant"))
        else return Unauthorized
  in BasicAuthCheck check
```

And now we create the Context used by servant to find BasicAuthCheck:

```
-- | We need to supply our handlers with the right Context. In this case,
-- Basic Authentication requires a Context Entry with the 'BasicAuthCheck' value
-- tagged with "foo-tag" This context is then supplied to 'server' and threaded
-- to the BasicAuth HasServer handlers.
basicAuthServerContext :: Context (BasicAuthCheck User ': '[])
basicAuthServerContext = authCheck :. EmptyContext
```

We're now ready to write our server method that will tie everything together:

```
-- | an implementation of our server. Here is where we pass all the handlers to our_
↳ endpoints.
-- In particular, for the BasicAuth protected handler, we need to supply a function
-- that takes 'User' as an argument.
basicAuthServer :: Server BasicAPI
basicAuthServer =
  let publicAPIHandler = return [PublicData "foo", PublicData "bar"]
      privateAPIHandler (user :: User) = return (PrivateData (userName user))
  in publicAPIHandler :<|> privateAPIHandler
```

Finally, our main method and a sample session working with our server:

```
-- | hello, server!
basicAuthMain :: IO ()
basicAuthMain = run 8080 (serveWithContext basicAuthApi
                                         basicAuthServerContext
                                         basicAuthServer
                                         )
```

(continues on next page)

```
{- Sample session

$ curl -XGET localhost:8080/public
[{"somedata":"foo"}, {"somedata":"bar"}

$ curl -iXGET localhost:8080/private
HTTP/1.1 401 Unauthorized
transfer-encoding: chunked
Date: Thu, 07 Jan 2016 22:36:38 GMT
Server: Warp/3.1.8
WWW-Authenticate: Basic realm="foo-realm"

$ curl -iXGET localhost:8080/private -H "Authorization: Basic c2VydmFudDpzZXJ2ZXI="
HTTP/1.1 200 OK
transfer-encoding: chunked
Date: Thu, 07 Jan 2016 22:37:58 GMT
Server: Warp/3.1.8
Content-Type: application/json
{"ssshhh":"servant"}
-}
```

1.7.2 Generalized Authentication

Sometimes your server's authentication scheme doesn't quite fit with the standards (or perhaps servant hasn't rolled-out support for that new, fancy authentication scheme). For such a scenario, servant 0.5 provides easy and simple experimental support to roll your own authentication.

Why experimental? We worked on the design for authentication for a long time. We really struggled to find a nice, type-safe niche in the design space. In fact, `Context` came out of this work, and while it really fit for schemes like Basic and JWT, it wasn't enough to fully support something like OAuth or HMAC, which have flows, roles, and other fancy ceremonies. Further, we weren't sure *how* people will use auth.

So, in typical startup fashion, we developed an MVP of 'generalized auth' and released it in an experimental module, with the hope of getting feedback from you! So, if you're reading this or using generalized auth support, please give us your feedback!

What is Generalized Authentication?

TL;DR: you throw a tagged `AuthProtect` combinator in front of the endpoints you want protected and then supply a function `Request -> Handler a`, where `a` is the type of your choice representing the data returned by successful authentication - e.g., a `User` or, in our example below, `Account`. This function is run anytime a request matches a protected endpoint. It precisely solves the "I just need to protect these endpoints with a function that does some complicated business logic" and nothing more. Behind the scenes we use a type family instance (`AuthServerData`) and `Context` to accomplish this.

Generalized Authentication in Action

Let's implement a trivial authentication scheme. We will protect our API by looking for a cookie named `"servant-auth-cookie"`. This cookie's value will contain a key from which we can lookup an `Account`.

```

-- | An account type that we "fetch from the database" after
-- performing authentication
newtype Account = Account { unAccount :: Text }

-- | A (pure) database mapping keys to accounts.
database :: Map ByteString Account
database = fromList [ ("key1", Account "Anne Briggs")
                    , ("key2", Account "Bruce Cockburn")
                    , ("key3", Account "Ghédalia Tazartès")
                    ]

-- | A method that, when given a password, will return an Account.
-- This is our bespoke (and bad) authentication logic.
lookupAccount :: ByteString -> Handler Account
lookupAccount key = case Map.lookup key database of
    Nothing -> throwError (err403 { errBody = "Invalid Cookie" })
    Just usr -> return usr
    
```

For generalized authentication, servant exposes the `AuthHandler` type, which is used to wrap the `Request -> Handler Account` logic. Let's create a value of type `AuthHandler Request Account` using the above `lookupAccount` method (note: we depend upon `cookie`'s `parseCookies` for this):

```

--- | The auth handler wraps a function from Request -> Handler Account.
--- We look for a token in the request headers that we expect to be in the cookie.
--- The token is then passed to our `lookupAccount` function.
authHandler :: AuthHandler Request Account
authHandler = mkAuthHandler handler
  where
    maybeToEither e = maybe (Left e) Right
    throw401 msg = throwError $ err401 { errBody = msg }
    handler req = either throw401 lookupAccount $ do
        cookie <- maybeToEither "Missing cookie header" $ lookup "cookie" $
        ↪ requestHeaders req
        ↪ maybeToEither "Missing token in cookie" $ lookup "servant-auth-cookie" $
        ↪ parseCookies cookie
    
```

Let's now protect our API with our new, bespoke authentication scheme. We'll re-use the endpoints from our Basic Authentication example.

```

-- | Our API, with auth-protection
type AuthGenAPI = "private" :> AuthProtect "cookie-auth" :> PrivateAPI
                :<|> "public" :> PublicAPI

-- | A value holding our type-level API
genAuthAPI :: Proxy AuthGenAPI
genAuthAPI = Proxy
    
```

Now we need to bring everything together for the server. We have the `AuthHandler Request Account` value and an `AuthProtected` endpoint. To bind these together, we need to provide a `Type Family` instance that tells the `HasServer` instance that our `Context` will supply a `Account` (via `AuthHandler Request Account`) and that downstream combinators will have access to this `Account` value (or an error will be thrown if authentication fails).

```

-- | We need to specify the data returned after authentication
type instance AuthServerData (AuthProtect "cookie-auth") = Account
    
```

Note that we specify the type-level tag `"cookie-auth"` when defining the type family instance. This allows us to

have multiple authentication schemes protecting a single API.

We now construct the `Context` for our server, allowing us to instantiate a value of type `Server AuthGenAPI`, in addition to the server value:

```
-- | The context that will be made available to request handlers. We supply the
-- "cookie-auth"-tagged request handler defined above, so that the 'HasServer'
↳instance
-- of 'AuthProtect' can extract the handler and run it on the request.
genAuthServerContext :: Context (AuthHandler Request Account ': '[])
genAuthServerContext = authHandler :. EmptyContext

-- | Our API, where we provide all the author-supplied handlers for each end
-- point. Note that 'privateDataFunc' is a function that takes 'Account' as an
-- argument. We don't worry about the authentication instrumentation here,
-- that is taken care of by supplying context
genAuthServer :: Server AuthGenAPI
genAuthServer =
  let privateDataFunc (Account name) =
        return (PrivateData ("this is a secret: " <> name))
        publicData = return [PublicData "this is a public piece of data"]
    in privateDataFunc :<|> publicData
```

We're now ready to start our server (and provide a sample session)!

```
-- | run our server
genAuthMain :: IO ()
genAuthMain = run 8080 (serveWithContext genAuthAPI genAuthServerContext
↳genAuthServer)

{- Sample Session:

$ curl -XGET localhost:8080/private
Missing auth header

$ curl -XGET localhost:8080/private -H "Cookie: servant-auth-cookie=key3"
[{"ssshhh":"this is a secret: Ghédalia Tazartès"}]

$ curl -XGET localhost:8080/private -H "Cookie: servant-auth-cookie=bad-key"
Invalid Cookie

$ curl -XGET localhost:8080/public
[{"somedata":"this is a public piece of data"}]
-}
```

Recap

Creating a generalized, ad-hoc authentication scheme was fairly straight forward:

1. use the `AuthProtect` combinator to protect your API.
2. choose an application-specific data type used by your server when authentication is successful (in our case this was `Account`).
3. Create a value of `AuthHandler Request Account` which encapsulates the authentication logic (`Request -> Handler Account`). This function will be executed every time a request matches a protected route.

4. Provide an instance of the `AuthServerData` type family, specifying your application-specific data type returned when authentication is successful (in our case this was `Account`).

Caveats:

1. The module `Servant.Server.Experimental.Auth` contains an orphan `HasServer` instance for the `AuthProtect` combinator. You may be get orphan instance warnings when using this.
2. Generalized authentication requires the `UndecidableInstances` extension.

1.7.3 Client-side Authentication

Basic Authentication

As of 0.5, *servant-client* comes with support for basic authentication! Endpoints protected by Basic Authentication will require a value of type `BasicAuthData` to complete the request.

You can find more comprehensive Basic Authentication example in the [Cookbook](#).

Generalized Authentication

Servant 0.5 also shipped with support for generalized authentication. Similar to the server-side support, clients need to supply an instance of the `AuthClientData` type family specifying the datatype the client will use to marshal an unauthenticated request into an authenticated request. Generally, this will look like:

```
import           Servant.Common.Reg      (Req, addHeader)

-- | The datatype we'll use to authenticate a request. If we were wrapping
-- something like OAuth, this might be a Bearer token.
type instance AuthClientData (AuthProtect "cookie-auth") = String

-- | A method to authenticate a request
authenticateReq :: String -> Req -> Req
authenticateReq s req = addHeader "my-bespoke-header" s req
```

Now, if the client method for our protected endpoint was `getProtected`, then we could perform authenticated requests as follows:

```
-- | one could curry this to make it simpler to work with.
result = runExceptT (getProtected (mkAuthenticateReq "secret" authenticateReq))
```


This page is a *collective effort* whose goal is to show how to solve many common problems with servant. If you're interested in contributing examples of your own, feel free to open an issue or a pull request on our [github repository](#) or even to just get in touch with us on the `##haskell-servant` IRC channel on [libera.chat](https://web.libera.chat/#haskell-servant) or on 'the mailing list'.

The scope is very wide. Simple and fancy authentication schemes, file upload, type-safe links, working with CSV, .zip archives, you name it!

2.1 Structuring APIs

In this recipe, we will see a few simple ways to structure your APIs by splitting them up into smaller “sub-APIs” or by sharing common structure between different parts. Let's start with the usual throat clearing.

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE TypeOperators #-}
{-# LANGUAGE KindSignatures #-}
import Data.Aeson
import GHC.Generics
import GHC.TypeLits
import Network.Wai.Handler.Warp
import Servant
```

Our application will consist of three different “sub-APIs”, with a few endpoints in each of them. Our global API is defined as follows.

```
type API = FactoringAPI
    :<|> SimpleAPI "users" User UserId
    :<|> SimpleAPI "products" Product ProductId
```

We simply join the three different parts with `:<|>`, as if each sub-API was just a simple endpoint. The first part, `FactoringAPI`, shows how we can “factor out” combinators that are common to several endpoints, just like we turn $a * b + a * c$ into $a * (b + c)$ in algebra.

(It should be noted that the `(<|>)` operator is not the only way of combining endpoints with Servant. Other techniques are shown in subsequent cookbooks. See [record-based alternative for implementing APIs](#))

```
-- Two endpoints:
-- - GET /x/<some 'Int'>[?y=<some 'Int'>]
-- - POST /x/<some 'Int'>
type FactoringAPI =
  "x" :> Capture "x" Int :>
    (   QueryParam "y" Int :> Get '[JSON] Int
      :<|>
        Post '[JSON] Int
    )

{- this is equivalent to:

type FactoringAPI' =
  "x" :> Capture "x" Int :> QueryParam "y" Int :> Get '[JSON] Int :<|>
  "x" :> Capture "x" Int :> Post '[JSON] Int
-}
```

You can see that both endpoints start with a static path fragment, `/x`, then capture some arbitrary `Int` until they finally differ. Now, this also has an effect on the server for such an API, and its type in particular. While the server for `FactoringAPI'` would be made of a function of type `Int -> Maybe Int -> Handler Int` and a function of type `Int -> Handler Int` glued with `<|>`, a server for `FactoringAPI` (without the `'`) reflects the “factorisation” and therefore, `Server FactoringAPI` is `Int -> (Maybe Int -> Handler Int :<|> Handler Int)`. That is, the server must be a function that takes an `Int` (the `Capture`) and returns two values glued with `<|>`, one of type `Maybe Int -> Handler Int` and the other of type `Handler Int`. Let’s provide such a server implementation, with those “nested types”.

Tip: you can load this module in `ghci` and ask for the concrete type that `Server FactoringAPI` “resolves to” by typing `:kind! Server FactoringAPI`.

```
factoringServer :: Server FactoringAPI
factoringServer x = getXY :<|> postX

  where getXY Nothing = return x
        getXY (Just y) = return (x + y)

        postX = return (x - 1)
```

If you want to avoid the “nested types” and the need to manually dispatch the arguments (like `x` above) to the different request handlers, and would just like to be able to declare the API type as above but pretending that the `Capture` is not factored out, that every combinator is “distributed” (i.e that all endpoints are specified like `FactoringAPI'` above), then you should look at `flatten` from the `servant-flatten` package.

Next come the two sub-APIs defined in terms of this `SimpleAPI` type, but with different parameters. That type is just a good old Haskell type synonym that abstracts away a pretty common structure in web services, where you have:

- one endpoint for listing a bunch of entities of some type
- one endpoint for accessing the entity with a given identifier
- one endpoint for creating a new entity

There are many variants on this theme (endpoints for deleting, paginated listings, etc). The simple definition below reproduces such a structure, but instead of picking concrete types for the entities and their identifiers, we simply let the user of the type decide, by making those types parameters of `SimpleAPI`. While we’re at it, we’ll put all our endpoints under a common prefix that we also take as a parameter.

```

-- Three endpoints:
--   - GET /<name>
--   - GET /<name>/<some 'i'>
--   - POST /<name>
type SimpleAPI (name :: Symbol) a i = name :>
  (
    Get '[JSON] [a]
  :<|> Capture "id" i    :> Get '[JSON] a
  :<|> ReqBody '[JSON] a :> Post '[JSON] NoContent
  )

```

Symbol is the kind of type-level strings, which is what servant uses for representing static path fragments. We can even provide a little helper function for creating a server for that API given one handler for each endpoint as arguments.

```

simpleServer
  :: Handler [a]
  -> (i -> Handler a)
  -> (a -> Handler NoContent)
  -> Server (SimpleAPI name a i)
simpleServer listAs getA postA =
  listAs :<|> getA :<|> postA

{- you could alternatively provide such a definition
   but with the handlers running in another monad,
   or even an arbitrary one!

simpleAPIServer
  :: m [a]
  -> (i -> m a)
  -> (a -> m NoContent)
  -> ServerT (SimpleAPI name a i) m
simpleAPIServer listAs getA postA =
  listAs :<|> getA :<|> postA

   and use 'hoistServer' on the result of `simpleAPIServer`
   applied to your handlers right before you call `serve`.
-}

```

We can use this to define servers for the user and product related sections of the API.

```

userServer :: Server (SimpleAPI "users" User UserId)
userServer = simpleServer
  (return [])
  (\userid -> return $
    if userid == 0
    then User "john" 64
    else User "everybody else" 10
  )
  (\_user -> return NoContent)

productServer :: Server (SimpleAPI "products" Product ProductId)
productServer = simpleServer
  (return [])
  (\_productid -> return $ Product "Great stuff")
  (\_product -> return NoContent)

```

Finally, some dummy types and the serving part.

```

type UserId = Int

data User = User { username :: String, age :: Int }
  deriving Generic

instance FromJSON User
instance ToJSON User

type ProductId = Int

data Product = Product { productname :: String }
  deriving Generic

instance FromJSON Product
instance ToJSON Product

api :: Proxy API
api = Proxy

main :: IO ()
main = run 8080 . serve api $
  factoringServer :<|> userServer :<|> productServer

```

This program is available as a cabal project [here](#).

2.1.1 Record-based alternative for implementing APIs

It should be noted that the (`:<|>`) is not the only way of combining endpoints. Servant offers a convenient way to design APIs with records avoiding the ordering constraint of the operator.

A simple case is approached in the [Record-based APIs: the simple case](#) cookbook, which deals with flat APIs where every endpoint is on the same level. Also, a more complex example with nested record is discussed in [Record-based APIs: the nested records case](#) in which we implement an API tree with many branches.

2.2 Record-based APIs: the simple case

This cookbook explains how to implement an API with a simple record-based structure. We only deal with non-nested APIs in which every endpoint is on the same level.

If a you need nesting because you have different branches in your API tree, you might want to jump directly to the [Record-based APIs: the nested records case](#) cookbook that broaches the subject.

Shall we begin?

2.2.1 Why would I want to use Records over the alternative `:<|>` operator?

With a record-based API, we don't need to care about the declaration order of the endpoints. For example, with the `:<|>` operator there's room for error when the order of the API type

```

type API1 = "version" :> Get '[JSON] Version
           :<|> "movies" :> Get '[JSON] [Movie]

```

does not follow the `Handler` implementation order

```
apiHandler :: ServerT API1 Handler
apiHandler =   getMovies
              :<|> getVersion
```

GHC could scold you with a very tedious message such as :

```

• Couldn't match type 'Handler NoContent'
  with 'Movie -> Handler NoContent'
  Expected type: ServerT MovieCatalogAPI Handler
  Actual type: Handler Version
    :<|> ((Maybe SortBy -> Handler [Movie])
      :<|> ((MovieId -> Handler (Maybe Movie))
        :<|> ((MovieId -> Movie -> Handler NoContent)
          :<|> (MovieId -> Handler NoContent))))

• In the expression:
  versionHandler
    :<|>
      movieListHandler
        :<|>
          getMovieHandler :<|> updateMovieHandler :<|> deleteMovieHandler
In an equation for 'server':
  server
    = versionHandler
      :<|>
        movieListHandler
          :<|>
            getMovieHandler :<|> updateMovieHandler :<|> deleteMovieHandler
|
226 | server = versionHandler
```

On the contrary, with the record-based technique, we refer to the routes by their name:

```
data API mode = API
  { list   :: "list"  :> ...
  , delete :: "delete" :> ...
  }
```

and GHC follows the lead :

```

• Couldn't match type 'NoContent' with 'Movie'
  Expected type: AsServerT Handler :- Delete '[JSON] Movie
  Actual type: Handler NoContent

• In the 'delete' field of a record
  In the expression:
  MovieAPI
    {get = getMovieHandler movieId,
     update = updateMovieHandler movieId,
     delete = deleteMovieHandler movieId}
In an equation for 'movieHandler':
  movieHandler movieId
    = MovieAPI
      {get = getMovieHandler movieId,
       update = updateMovieHandler movieId,
       delete = deleteMovieHandler movieId}
|
252 |     , delete = deleteMovieHandler movieId
```

So, records are more readable for a human, and GHC gives you more accurate error messages.

What are we waiting for?

```
{-# LANGUAGE DataKinds    #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE RankNTypes   #-}
{-# LANGUAGE TypeOperators #-}
module Main (main, api, getLink, routesLinks, cliGet) where

import Control.Exception      (throwIO)
import Control.Monad.Trans.Reader (ReaderT, runReaderT)
import Data.Proxy             (Proxy (..))
import Network.Wai.Handler.Warp (run)
import System.Environment     (getArgs)

import Servant
import Servant.Client

import Servant.API.Generic
import Servant.Client.Generic
import Servant.Server.Generic
```

The usage is simple, if you only need a collection of routes. First you define a record with field types prefixed by a parameter mode:

```
data Routes mode = Routes
  { _get :: mode :- Capture "id" Int -> Get '[JSON] String
  , _put :: mode :- ReqBody '[JSON] Int -> Put '[JSON] Bool
  }
  deriving (Generic)
```

Then we'll use this data type to define API, links, server and client.

2.2.2 API

You can get a `Proxy` of the API using `genericApi`:

```
api :: Proxy (ToServantApi Routes)
api = genericApi (Proxy :: Proxy Routes)
```

It's recommended to use `genericApi` function, as then you'll get better error message, for example if you forget to derive `Generic`.

2.2.3 Links

The clear advantage of record-based generics approach, is that we can get safe links very conveniently. We don't need to define endpoint types, as field accessors work as proxies:

```
getLink :: Int -> Link
getLink = fieldLink _get
```

We can also get all links at once, as a record:

```
routesLinks :: Routes (AsLink Link)
routesLinks = allFieldLinks
```

2.2.4 Client

Even more power starts to show when we generate a record of client functions. Here we use `genericClientHoist` function, which lets us simultaneously hoist the monad, in this case from `ClientM` to `IO`.

```
cliRoutes :: Routes (AsClientT IO)
cliRoutes = genericClientHoist
  (\x -> runClientM x env >>= either throwIO return)
  where
    env = error "undefined environment"

cliGet :: Int -> IO String
cliGet = _get cliRoutes
```

2.2.5 Server

Finally, probably the most handy usage: we can convert record of handlers into the server implementation:

```
record :: Routes AsServer
record = Routes
  { _get = return . show
  , _put = return . odd
  }

app :: Application
app = genericServe record

main :: IO ()
main = do
  args <- getArgs
  case args of
    ("run":_) -> do
      putStrLn "Starting cookbook-generic at http://localhost:8000"
      run 8000 app
      -- see this cookbook below for custom-monad explanation
    ("run-custom-monad":_) -> do
      putStrLn "Starting cookbook-generic with a custom monad at http://
↳localhost:8000"
      run 8000 (appMyMonad AppCustomState)
    _ -> putStrLn "To run, pass 'run' argument: cabal new-run cookbook-generic run
↳"
```

2.2.6 Using record-based APIs together with a custom monad

If your app uses a custom monad, here's how you can combine it with generics.

```
data AppCustomState =
  AppCustomState

type AppM = ReaderT AppCustomState Handler

getRouteMyMonad :: Int -> AppM String
getRouteMyMonad = return . show
```

(continues on next page)

(continued from previous page)

```

putRouteMyMonad :: Int -> AppM Bool
putRouteMyMonad = return . odd

recordMyMonad :: Routes (AsServerT AppM)
recordMyMonad = Routes {_get = getRouteMyMonad, _put = putRouteMyMonad}

-- natural transformation
nt :: AppCustomState -> AppM a -> Handler a
nt s x = runReaderT x s

appMyMonad :: AppCustomState -> Application
appMyMonad state = genericServeT (nt state) recordMyMonad

```

2.3 Record-based APIs: the nested records case

Available in Servant 0.19 or higher

Servant offers a very natural way of constructing APIs with nested records, called `NamedRoutes`.

This cookbook explains how to implement such nested-record-based-APIs using `NamedRoutes` through the example of a Movie Catalog. If you don't need the nested aspect of the record-based API, you might want to look at [Record-based APIs: the simple case](#) cookbook which covers a simpler implementation in which every endpoint is on the same level.

First, we start by constructing the domain types of our Movie Catalog. After, we show you how to implement the API type with the `NamedRoutes` records. Lastly, we make a Server and a Client out of the API type.

However, it should be understood that this cookbook does *not* dwell on the built-in servant combinators as the [Structuring APIs](#) cookbook already covers that angle.

2.3.1 Boilerplate time!

First, let's get rid of the the extensions and imports boilerplate in order to focus on our new technique:

```

{-# LANGUAGE DataKinds           #-}
{-# LANGUAGE DeriveAnyClass      #-}
{-# LANGUAGE DerivingStrategies #-}
{-# LANGUAGE DeriveGeneric       #-}
{-# LANGUAGE OverloadedStrings  #-}
{-# LANGUAGE TypeOperators       #-}

import GHC.Generics              ( Generic )
import Data.Aeson                ( FromJSON, ToJSON )
import Data.Proxy                ( Proxy(..) )
import Network.Wai.Handler.Warp ( run )

import Servant                   ( NamedRoutes
                                , Handler, serve )
import Servant.API               ( Capture, Delete, Get, Put, QueryParam, ReqBody
                                , JSON, NoContent(..)
                                , FromHttpApiData(..), ToHttpApiData(..)
                                , (>) )
import Servant.API.Generic       ( (->) )

```

(continues on next page)

(continued from previous page)

```
import Servant.Client          ( AsClientT, ClientM, client
                              , (//), (/:) )
import Servant.Client.Generic  ()

import Servant.Server         ( Application, ServerT )
import Servant.Server.Generic ( AsServer )
```

2.3.2 Domain context

Now that we've handled the boilerplate, we can dive into our Movie Catalog domain.

Consider a `Movie` constructed from a `Title` and a `Year` of publication.

```
data Movie = Movie
  { movieId :: MovieId
  , title  :: Title
  , year  :: Year
  }
  deriving stock Generic
  deriving anyclass (FromJSON, ToJSON)

type MovieId = String
type Title   = String
type Year     = Int
```

Let's forget about the deriving stuff for now and think about the API that we want to make.

```
"version" -> Get Version
/
api       "list" -> Get [Movie] ?sortBy= Title | Year      (sort by the Title or
↳the Year)
 \       /
  "movies"           \      Get Movie
                    \      /
                    Capture MovieId - Put Movie
                              \
                              Delete MovieId
```

In this example, we create a very simple endpoint for the `Version`, and several complex endpoints that use nested records for the CRUD part of the movie.

So, the URLs would look like

- GET `.../version`
- GET `.../movies/list?sortBy=Title`
- GET `.../movies//`
- PUT `.../movies//`
- DELETE `.../movies/`

API Type

Now that we have a very clear idea of the API we want to make, we need to transform it into usable Haskell code:

```
data API mode = API
  { version :: mode :- "version" :> Get '[JSON] Version
  , movies :: mode :- "movies" :> NamedRoutes MoviesAPI
  } deriving stock Generic

type Version = String -- This will do for the sake of example.
```

Here, we see the first node of our tree. It contains the two branches “version” and “movies” respectively:

The “version” branch is very simple and self-explanatory. The “movies” branch will contain another node, represented by another record (see above). That is why we need the `NamedRoutes` helper.

Note:

The `mode` type parameter indicates into which implementation the record’s `Generic` representation will be transformed—as a client or as a server. We will discuss that later.

Let’s jump into the “movies” subtree node:

```
data MoviesAPI mode = MoviesAPI
  { list :: mode :- "list" :> QueryParam "SortBy" SortBy :> Get '[JSON] [Movie]
  , movie :: mode :- Capture "movieId" MovieId :> NamedRoutes MovieAPI
  } deriving stock Generic

data SortBy = Year | Title

instance ToHttpApiData SortBy where
  toQueryParam Year = "year"
  toQueryParam Title = "title"

instance FromHttpApiData SortBy where
  parseQueryParam "year" = Right Year
  parseQueryParam "title" = Right Title
  parseQueryParam param = Left $ param <> " is not a valid value"
```

So, remember, this type represents the `MoviesAPI` node that we’ve connected earlier to the main API tree.

In this subtree, we illustrated both an endpoint with a **query param** and also, a **capture** with a subtree underneath it.

So, let’s go deeper into our API tree.

```
data MovieAPI mode = MovieAPI
  { get :: mode :- Get '[JSON] (Maybe Movie)
  , update :: mode :- ReqBody '[JSON] Movie :> Put '[JSON] NoContent
  , delete :: mode :- Delete '[JSON] NoContent
  } deriving stock Generic
```

As you can see, we end up implementing the deepest routes of our API.

Small detail: as our main API tree is also a record, we need the `NamedRoutes` helper. To improve readability, we suggest you create a type alias:

```
type MovieCatalogAPI = NamedRoutes API
```

That’s it, we have our `MovieCatalogAPI` type!

Let’s make a server and a client out of it!

2.3.3 The Server

As you know, we can't talk about a server, without addressing the handlers.

First, we take our handlers...

```

versionHandler :: Handler Version
versionHandler = pure "0.0.1"

movieListHandler :: Maybe SortBy -> Handler [Movie]
movieListHandler _ = pure moviesDB

moviesDB :: [Movie]
moviesDB =
  [ Movie "1" "Se7en" 1995
  , Movie "2" "Minority Report" 2002
  , Movie "3" "The Godfather" 1972
  ]

getMovieHandler :: MovieId -> Handler (Maybe Movie)
getMovieHandler requestMovieId = go moviesDB
  where
    go [] = pure Nothing
    go (movie:ms) | movieId movie == requestMovieId = pure $ Just movie
    go (m:ms) = go ms

updateMovieHandler :: MovieId -> Movie -> Handler NoContent
updateMovieHandler requestedMovieId newMovie =
  -- update the movie list in the database...
  pure NoContent

deleteMovieHandler :: MovieId -> Handler NoContent
deleteMovieHandler _ =
  -- delete the movie from the database...
  pure NoContent

```

And assemble them together with the record structure, which is the glue here.

```

server :: API AsServer
server =
  API
  { version = versionHandler
  , movies = moviesHandler
  }

moviesHandler :: MoviesAPI AsServer
moviesHandler =
  MoviesAPI
  { list = movieListHandler
  , movie = movieHandler
  }

movieHandler :: MovieId -> MovieAPI AsServer
movieHandler movieId = MovieAPI
  { get = getMovieHandler movieId
  , update = updateMovieHandler movieId
  , delete = deleteMovieHandler movieId
  }

```

As you might have noticed, we build our handlers out of the same record types we used to define our API: `MoviesAPI` and `MovieAPI`. What kind of magic is this ?

Finally, we can run the server and connect the API routes to the handlers as usual:

```
api :: Proxy MovieCatalogAPI
api = Proxy

main :: IO ()
main = run 8081 app

app :: Application
app = serve api server
```

Yay! That's done and we've got our server!

2.3.4 The Client

The client, so to speak, is very easy to implement:

```
movieCatalogClient :: API (AsClientT ClientM)
movieCatalogClient = client api -- remember: api :: Proxy MovieCatalogAPI
```

We've also introduced some operators that help navigate through the nested records.

`(//)` is used to jump from one record to another. `(/:)` is used to provide a parameter, whether it be a query param or a capture.

Let's use those nice helpers for our movie catalog:

```
listMovies :: Maybe SortBy -> ClientM [Movie]
listMovies sortBy = movieCatalogClient // movies // list /: sortBy

getMovie :: MovieId -> ClientM (Maybe Movie)
getMovie movieId = movieCatalogClient // movies // movie /: movieId // get

updateMovie :: MovieId -> Movie -> ClientM NoContent
updateMovie movieId newMovie = movieCatalogClient // movies // movie /: movieId //
↳update /: newMovie

deleteMovie :: MovieId -> ClientM NoContent
deleteMovie movieId = movieCatalogClient // movies // movie /: movieId // delete
```

Done! We've got our client!

2.3.5 Conclusion

We hope that you found this cookbook helpful, and that you now feel more confident using the record-based APIs, nested or not.

If you are interested in further understanding the built-in Servant combinators, see [Structuring APIs](#).

Since `NamedRoutes` is based on the `Generic` mechanism, you might want to have a look at [Sandy Maguire's *Thinking with Types*](#) book.

2.4 Serving web applications over HTTPS

This short recipe shows how one can serve a servant application over HTTPS, by simply using `warp-tls` instead of `warp` to provide us a `run` function for running the `Application` that we get by calling `serve`.

As usual, we start by clearing our throat of a few language extensions and imports.

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE TypeOperators #-}
import Network.Wai
import Network.Wai.Handler.Warp
import Network.Wai.Handler.WarpTLS
import Servant
```

No need to work with a complicated API here, let's make it as simple as it gets:

```
type API = Get '[JSON] Int

api :: Proxy API
api = Proxy

server :: Server API
server = return 10

app :: Application
app = serve api server
```

It's now time to actually run the `Application`. The `warp-tls` package provides two functions for running an `Application`, called `runTLS` and `runTLSSocket`. We will be using the first one.

It takes two arguments, the `TLS settings` (certificates, keys, ciphers, etc) and the `warp settings` (port, logger, etc).

We will be using very simple settings for this example but you are of course invited to read the documentation for those types to find out about all the knobs that you can play with.

```
main :: IO ()
main = runTLS tlsOpts warpOpts app

where tlsOpts = tlsSettings "cert.pem" "secret-key.pem"
      warpOpts = setPort 8080 defaultSettings
```

This program is available as a cabal project [here](#).

2.5 Overview

This doc will walk through a single-module implementation of a servant API connecting to a MySQL database. It will also include some basic CRUD operations.

Once you can wrap your head around this implementation, understanding more complex features like resource pools would be beneficial next steps.

The only *prerequisite* is that you have a MySQL database open on port 3306 of your machine. Docker is an easy way to manage this.

2.5.1 Setup

- The mysql database should be up and running on 127.0.0.1:3306
- Our API will be exposed on localhost:8080

2.5.2 REST actions available

Get all people

```
/people GET
```

Get person by ID

```
/people/:id GET
```

Insert a new person

```
/people POST
{
  "name": "NewName",
  "age": 24
}
```

Delete a person

```
/people/:id DELETE
```

2.5.3 Other notes

At the time of writing this issue may occur when building your project:

```
setup: Missing dependencies on foreign libraries:
* Missing (or bad) C libraries: ssl, crypto
```

If using stack, this can be fixed by adding the following lines to your `stack.yaml`:

```
extra-include-dirs:
- /usr/local/opt/openssl/include
extra-lib-dirs:
- /usr/local/opt/openssl/lib
```

Or for cabal, running your builds with these configurations passed as options.

2.5.4 Implementation: Main.hs

Let's jump in:

```
{-# LANGUAGE DataKinds          #-}
{-# LANGUAGE DeriveGeneric      #-}
{-# LANGUAGE FlexibleInstances   #-}
{-# LANGUAGE GADTs              #-}
{-# LANGUAGE GeneralizedNewtypeDeriving #-}
```

(continues on next page)

(continued from previous page)

```

{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE QuasiQuotes           #-}
{-# LANGUAGE TemplateHaskell      #-}
{-# LANGUAGE TypeFamilies         #-}
{-# LANGUAGE TypeOperators        #-}
module Lib where

import Control.Monad.IO.Class      (liftIO)
import Control.Monad.Logger        (NoLoggingT (..))
import Control.Monad.Trans.Reader  (runReaderT)
import Control.Monad.Trans.Resource (ResourceT, runResourceT)
import Data.Aeson as JSON
import Data.Int                    (Int64 (..))
import Data.Text                   (Text)
import qualified Data.Text          as T
import qualified Data.Text.IO       as T
import Database.Persist
import Database.Persist.MySQL      (ConnectInfo (..),
                                     SqlBackend (..),
                                     defaultConnectInfo, fromSqlKey, runSqlPool, toSqlKey, withMySQLConn)
import Database.Persist.Sql        (SqlPersistT, runSqlConn)
import Database.Persist.TH         (mkMigrate, mkPersist,
                                     persistLowerCase, share,
                                     sqlSettings)
import Database.Persist.Types     (PersistValue (PersistInt64))
import Servant                     (Handler, throwError)

import GHC.Generics
import Network.Wai
import Network.Wai.Handler.Warp
import Servant
import Servant.API
import System.Environment          (getArgs)

share [mkPersist sqlSettings, mkMigrate "migrateAll"] [persistLowerCase|
Person json
  Id   Int Primary Unique
  name Text
  age  Text
  deriving Eq Show Generic
|]

type Api =
  "person" :> Get '[JSON] [Person]
  <|> "person" :> Capture "id" Int :> Get '[JSON] Person
  <|> "person" :> Capture "id" Int :> Delete '[JSON] ()
  <|> "person" :> ReqBody '[JSON] Person :> Post '[JSON] Person

apiProxy :: Proxy Api
apiProxy = Proxy

app :: Application
app = serve apiProxy server

-- Run a database operation, and lift the result into a Handler.

```

(continues on next page)

```

-- This minimises usage of IO operations in other functions
runDB :: SqlPersistT (ResourceT (NoLoggingT IO)) a -> Handler a
runDB a = liftIO $ runNoLoggingT $ runResourceT $ withMySQLConn connInfo $ runSqlConn_
↳ a

-- Change these out to suit your local setup
connInfo :: ConnectInfo
connInfo = defaultConnectInfo { connectHost = "127.0.0.1", connectUser = "root",
↳ connectPassword = "abcd", connectDatabase = "test-database" }

doMigration :: IO ()
doMigration = runNoLoggingT $ runResourceT $ withMySQLConn connInfo $ runReaderT $
↳ runMigration migrateAll

server :: Server Api
server =
  personGET :<|>
  personGETById :<|>
  personDELETE :<|>
  personPOST
  where
    personGET = selectPersons
    personGETById id = selectPersonById id
    personDELETE id = deletePerson id
    personPOST personJson = createPerson personJson

selectPersons :: Handler [Person]
selectPersons = do
  personList <- runDB $ selectList [] []
  return $ map (\(Entity _ u) -> u) personList

selectPersonById :: Int -> Handler Person
selectPersonById id = do
  sqlResult <- runDB $ get $ PersonKey id
  case sqlResult of
    Just person -> return person
    Nothing -> throwError err404 { errBody = JSON.encode "Person with ID not found." }

createPerson :: Person -> Handler Person
createPerson person = do
  attemptCreate <- runDB $ insert person
  case attemptCreate of
    PersonKey k -> return person
    _ -> throwError err503 { errBody = JSON.encode "Could not create Person."
↳ }

deletePerson :: Int -> Handler ()
deletePerson id = do runDB $ delete $ PersonKey id

startApp :: IO ()
startApp = do
  args <- getArgs
  let arg1 = if not (null args) then Just (head args) else Nothing
  case arg1 of
    Just "migrate" -> doMigration
    _ -> run 8080 app

```


2.5.5 Sample requests

Assuming that you have the db running and have first run `stack exec run migrate`, the following sample requests will test your API:

Create a person

```
curl -X POST \
  http://localhost:8080/person \
  -H 'Accept: */*' \
  -H 'Accept-Encoding: gzip, deflate' \
  -H 'Cache-Control: no-cache' \
  -H 'Connection: keep-alive' \
  -H 'Content-Length: 62' \
  -H 'Content-Type: application/json' \
  -H 'Host: localhost:8080' \
  -H 'cache-control: no-cache' \
  -d '{
    "name": "Jake",
    "age": "25"
  }'
```

Get all persons

```
curl -X GET \
  http://localhost:8080/person \
  -H 'Accept: */*' \
  -H 'Accept-Encoding: gzip, deflate' \
  -H 'Cache-Control: no-cache' \
  -H 'Connection: keep-alive' \
  -H 'Content-Length: 33' \
  -H 'Content-Type: application/json' \
  -H 'Host: localhost:8080' \
  -H 'cache-control: no-cache'
```

Get person by ID

```
curl -X GET \
  http://localhost:8080/person/1 \
  -H 'Accept: */*' \
  -H 'Accept-Encoding: gzip, deflate' \
  -H 'Cache-Control: no-cache' \
  -H 'Connection: keep-alive' \
  -H 'Content-Type: application/json' \
  -H 'Host: localhost:8080' \
  -H 'cache-control: no-cache'
```

2.6 SQLite database

Let's see how we can write a simple web application that uses an [SQLite](#) database to store simple textual messages. As usual, we start with a little bit of throat clearing.

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE OverloadedStrings #-}
{-# LANGUAGE TypeOperators #-}
```

(continues on next page)

(continued from previous page)

```
import Control.Concurrent
import Control.Exception (bracket)
import Control.Monad.IO.Class
import Database.SQLite.Simple
import Network.HTTP.Client (newManager, defaultManagerSettings)
import Network.Wai.Handler.Warp
import Servant
import Servant.Client
```

We will only care about a single type here, the messages. We want to be able to add a new one and retrieve them all, using two different endpoints.

```
type Message = String

type API = ReqBody '[PlainText] Message -> Post '[JSON] NoContent
        :<|> Get '[JSON] [Message]

api :: Proxy API
api = Proxy
```

We proceed with a simple function for creating a table for holding our messages if it doesn't already exist.

```
initDB :: FilePath -> IO ()
initDB dbfile = withConnection dbfile $ \conn ->
  execute_ conn
    "CREATE TABLE IF NOT EXISTS messages (msg text not null)"
```

Next, our server implementation. It will be parametrised (take as an argument) by the name of the file that contains our SQLite database. The handlers are straightforward. One takes care of inserting a new value in the database while the other fetches all messages and returns them. We also provide a function for serving our web app given an SQLite database file, which simply calls servant-server's `serve` function.

```
server :: FilePath -> Server API
server dbfile = postMessage :<|> getMessages

  where postMessage :: Message -> Handler NoContent
        postMessage msg = do
          liftIO . withConnection dbfile $ \conn ->
            execute conn
              "INSERT INTO messages VALUES (?)"
              (Only msg)
          return NoContent

        getMessages :: Handler [Message]
        getMessages = fmap (map fromOnly) . liftIO $
          withConnection dbfile $ \conn ->
            query_ conn "SELECT msg FROM messages"

runApp :: FilePath -> IO ()
runApp dbfile = run 8080 (serve api $ server dbfile)
```

Let's also derive some clients for our API and use them to insert two messages and retrieve them in `main`.

```
postMsg :: Message -> ClientM NoContent
getMsgs :: ClientM [Message]
postMsg :<|> getMsgs = client api
```

(continues on next page)

(continued from previous page)

```

main :: IO ()
main = do
  -- you could read this from some configuration file,
  -- environment variable or somewhere else instead.
  let dbfile = "test.db"
      initDB dbfile
      mgr <- newManager defaultManagerSettings
      bracket (forkIO $ runApp dbfile) killThread $ \_ -> do
        ms <- flip runClientM (mkClientEnv mgr (BaseUrl Http "localhost" 8080 "")) $ do
          postMsg "hello"
          postMsg "world"
          getMsgs
        print ms

```

This program prints `Right ["hello", "world"]` the first time it is executed, `Right ["hello", "world", "hello", "world"]` the second time and so on.

The entire source for this example is available as a cabal project [here](#).

2.7 PostgreSQL connection pool

Let's see how we can write a simple web application that uses a [PostgreSQL](#) database to store simple textual messages, just like in the [SQLite cookbook recipe](#). The main difference, besides the database technology, is that in this example we will be using a pool of connections to talk to the database server. The pool abstraction will be provided by the `resource-pool` library.

As usual, we start with a little bit of throat clearing.

```

{-# LANGUAGE DataKinds #-}
{-# LANGUAGE OverloadedStrings #-}
{-# LANGUAGE TypeOperators #-}
import Data.ByteString (ByteString)
import Control.Concurrent
import Control.Exception (bracket)
import Control.Monad.IO.Class
import Data.Pool
import Database.PostgreSQL.Simple
import Network.HTTP.Client (newManager, defaultManagerSettings)
import Network.Wai.Handler.Warp
import Servant
import Servant.Client

type DBConnectionString = ByteString

```

We will only care about a single type here, the messages. We want to be able to add a new one and retrieve them all, using two different endpoints.

```

type Message = String

type API = ReqBody '[PlainText] Message -> Post '[JSON] NoContent
         :<|> Get '[JSON] [Message]

api :: Proxy API
api = Proxy

```

We proceed with a simple function for creating a table for holding our messages if it doesn't already exist, given a PostgreSQL connection string.

```
initDB :: DBConnectionString -> IO ()
initDB connstr = bracket (connectPostgreSQL connstr) close $ \conn -> do
  execute_ conn
    "CREATE TABLE IF NOT EXISTS messages (msg text not null)"
  return ()
```

Next, our server implementation. It will be parametrised (take as argument) by the pool of database connections that handlers can use to talk to the PostgreSQL database. The resource pool abstraction allows us to flexibly set up a whole bunch of PostgreSQL connections tailored to our needs and then to forget about it all by simply asking for a connection using `withResource`.

The handlers are straightforward. One takes care of inserting a new value in the database while the other fetches all messages and returns them. We also provide a function for serving our web app given a PostgreSQL connection pool, which simply calls servant-server's `serve` function.

```
server :: Pool Connection -> Server API
server conns = postMessage :<|> getMessages

  where postMessage :: Message -> Handler NoContent
        postMessage msg = do
          liftIO . withResource conns $ \conn ->
            execute conn
              "INSERT INTO messages VALUES (?)"
              (Only msg)
          return NoContent

        getMessages :: Handler [Message]
        getMessages = fmap (map fromOnly) . liftIO $
          withResource conns $ \conn ->
            query_ conn "SELECT msg FROM messages"

runApp :: Pool Connection -> IO ()
runApp conns = run 8080 (serve api $ server conns)
```

We will also need a function for initialising our connection pool. `resource-pool` is quite configurable, feel free to wander in [its documentation](#) to gain a better understanding of how it works and what the configuration knobs are. I will be using some dummy values in this example.

```
initConnectionPool :: DBConnectionString -> IO (Pool Connection)
initConnectionPool connStr =
  createPool (connectPostgreSQL connStr)
    close
    2 -- stripes
    60 -- unused connections are kept open for a minute
    10 -- max. 10 connections open per stripe
```

Let's finally derive some clients for our API and use them to insert two messages and retrieve them in `main`, after setting up our pool of database connections.

```
postMsg :: Message -> ClientM NoContent
getMsgs :: ClientM [Message]
postMsg :<|> getMsgs = client api

main :: IO ()
```

(continues on next page)

(continued from previous page)

```

main = do
  -- you could read this from some configuration file,
  -- environment variable or somewhere else instead.
  -- you will need to either change this connection string OR
  -- set some environment variables (see
  -- https://www.postgresql.org/docs/9.5/static/libpq-params.html)
  -- to point to a running PostgreSQL server for this example to work.
  let connStr = ""
  pool <- initConnectionPool connStr
  initDB connStr
  mgr <- newManager defaultManagerSettings
  bracket (forkIO $ runApp pool) killThread $ \_ -> do
    ms <- flip runClientM (mkClientEnv mgr (BaseUrl Http "localhost" 8080 "")) $ do
      postMsg "hello"
      postMsg "world"
      getMsgs
    print ms

```

This program prints `Right ["hello", "world"]` the first time it is executed, `Right ["hello", "world", "hello", "world"]` the second time and so on.

You could alternatively have the handlers live in `ReaderT (Pool Connection)` and access the pool using e.g `ask`, but this would be more complicated than simply taking the pool as argument.

The entire source for this example is available as a cabal project [here](#).

2.8 Using a custom monad

In this section we will create an API for a book shelf without any backing DB storage. We will keep state in memory and share it between requests using `Reader` monad and `STM`.

We start with a pretty standard set of imports and definition of the model:

```

{-# LANGUAGE DataKinds #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE TypeOperators #-}

import Control.Concurrent (forkIO, killThread)
import Control.Concurrent.STM.TVar (TVar, newTVar, readTVar,
writeTVar)
import Control.Exception (bracket)
import Control.Monad.IO.Class (liftIO)
import Control.Monad.STM (atomically)
import Control.Monad.Trans.Reader (ReaderT, ask, runReaderT)
import Data.Aeson (FromJSON, ToJSON)
import GHC.Generics (Generic)
import Network.HTTP.Client (defaultManagerSettings,
newManager)
import Network.Wai.Handler.Warp (run)

import Servant
import Servant.Client

newtype Book = Book String deriving (Show, Generic)
instance ToJSON Book
instance FromJSON Book

```

Now, let's define the API for book storage. For the sake of simplicity we'll only have methods for getting all books and adding a new one.

```
type GetBooks = Get '[JSON] [Book]
type AddBook = ReqBody '[JSON] Book :=> PostCreated '[JSON] Book
type BooksAPI = "books" :=> (GetBooks :<|> AddBook)

api :: Proxy BooksAPI
api = Proxy
```

Next, we define the state and the monad to run our handlers

```
data State = State
  { books :: TVar [Book]
  }

type AppM = ReaderT State Handler
```

Note that we can't use State monad here, because state will not be shared between requests.

We can now define handlers in terms of AppM...

```
server :: ServerT BooksAPI AppM
server = getBooks :<|> addBook
  where getBooks :: AppM [Book]
        getBooks = do
          State{books = p} <- ask
          liftIO $ atomically $ readTVar p

        addBook :: Book -> AppM Book
        addBook book = do
          State{books = p} <- ask
          liftIO $ atomically $ readTVar p >>= writeTVar p . (book :)
          return book
```

...and transform AppM to Handler by simply using runReaderT

```
nt :: State -> AppM a -> Handler a
nt s x = runReaderT x s

app :: State -> Application
app s = serve api $ hoistServer api (nt s) server
```

Finally, we end up with the following program

```
main :: IO ()
main = do
  let port = 8080
      mgr <- newManager defaultManagerSettings
      initialBooks <- atomically $ newTVar []
      let runApp = run port $ app $ State initialBooks
          bracket (forkIO runApp) killThread $ \_ -> do
            let getBooksClient :<|> addBookClient = client api
                let printBooks = getBooksClient >>= liftIO . print
                    _ <- flip runClientM (mkClientEnv mgr (BaseUrl Http "localhost" port "")) $ do
                        _ <- printBooks
                        _ <- addBookClient $ Book "Harry Potter and the Order of the Phoenix"
                        _ <- printBooks
```

(continues on next page)

(continued from previous page)

```

_ <- addBookClient $ Book "To Kill a Mockingbird"
_ <- printBooks
_ <- addBookClient $ Book "The Picture of Dorian Gray"
printBooks
return ()

```

When run, it outputs the following:

```

Running cookbook-using-custom-monad...
[]
[Book "Harry Potter and the Order of the Phoenix"]
[Book "To Kill a Mockingbird",Book "Harry Potter and the Order of the Phoenix"]
[Book "The Picture of Dorian Gray",Book "To Kill a Mockingbird",Book "Harry Potter,
↳and the Order of the Phoenix"]

```

To use Raw endpoints, look at the `servant-rawm` package.

2.9 Inspecting, debugging, simulating clients and more

or simply put: *a practical introduction to `Servant.Client.Free`*.

Someone asked on IRC how one could access the intermediate Requests (resp. Responses) produced (resp. received) by client functions derived using `servant-client`. My response to such inquiries is: to extend `servant-client` in an ad-hoc way (e.g for testing or debugging purposes), use `Servant.Client.Free`. This recipe shows how.

First the module header, but this time We'll comment the imports.

```

{-# LANGUAGE DataKinds #-}
{-# LANGUAGE TypeOperators #-}
module Main (main) where

```

We will primarily use `Servant.Client.Free`, it doesn't re-export anything from `free` package, so we need to import it as well.

```

import Control.Monad.Free
import Servant.Client.Free

```

Also we'll use `servant-client` internals, which uses `http-client`, so let's import them *qualified*

```

import qualified Servant.Client.Internal.HttpClient as I
import qualified Network.HTTP.Client as HTTP

```

The rest of the imports are for a server we implement here for completeness.

```

import Servant
import Network.Wai.Handler.Warp (run)
import System.Environment (getArgs)

```

2.9.1 API & Main

We'll work with a very simple API:

```
type API = "square" :> Capture "n" Int :> Get '[JSON] Int

api :: Proxy API
api = Proxy
```

Next we implement a main. If passed "server" it will run server, if passed "client" it will run a test function (to be defined next). This should be pretty straightforward:

```
main :: IO ()
main = do
  args <- getArgs
  case args of
    ("server":_) -> do
      putStrLn "Starting cookbook-using-free-client at http://localhost:8000"
      run 8000 $ serve api $ \n -> return (n * n)
    ("client":_) ->
      test
  _ -> do
    putStrLn "Try:"
    putStrLn "cabal new-run cookbook-using-free-client server"
    putStrLn "cabal new-run cookbook-using-free-client client"
```

2.9.2 Test

In the client part, we will use a `Servant.Client.Free` client. Because we have a single endpoint API, we'll get a single client function, running in the `Free ClientF` (`free`) monad:

```
getSquare :: Int -> Free ClientF Int
getSquare = client api
```

Such clients are “client functions without a backend”, so to speak, or where the backend has been abstracted out. To be more precise, `ClientF` is a functor that precisely represents the operations servant-client-core needs from an http client backend. So if we are to emulate one or augment what such a backend does, it will be by interpreting all those operations, the way we want to. This also means we get access to the requests and responses and can do anything we want with them, right when they are produced or consumed, respectively.

Next, we can write our small test. We'll pass a value to `getSquare` and inspect the `Free` structure. The first three possibilities are self-explanatory:

```
test :: IO ()
test = case getSquare 42 of
  Pure n ->
    putStrLn $ "ERROR: got pure result: " ++ show n
  Free (Throw err) ->
    putStrLn $ "ERROR: got error right away: " ++ show err
```

We are interested in `RunRequest`, that's what client should block on:

```
Free (RunRequest req k) -> do
```

Then we need to prepare the context, get HTTP (connection) Manager and `BaseUrl`:

```
burl <- parseBaseUrl "http://localhost:8000"
mgr <- HTTP.newManager HTTP.defaultManagerSettings
```


Now we can use `servant-client`'s internals to convert servant's `Request` to `http-client`'s `Request`, and we can inspect it:

```
let req' = I.defaultMakeClientRequest burl req
putStrLn $ "Making request: " ++ show req'
```

`servant-client`'s request does a little more, but this is good enough for our demo. We get back an `http-client` `Response` which we can also inspect.

```
res' <- HTTP.httpLbs req' mgr
putStrLn $ "Got response: " ++ show res'
```

And we continue by turning `http-client`'s `Response` into servant's `Response`, and calling the continuation. We should get a `Pure` value.

```
let res = I.clientResponseToResponse id res'

case k res of
  Pure n ->
    putStrLn $ "Expected 1764, got " ++ show n
  _ ->
    putStrLn "ERROR: didn't get a response"
```

So that's it. Using `Free` we can evaluate servant clients step-by-step, and validate that the client functions or the `HTTP` client backend does what we expect (e.g by printing requests/responses on the fly). In fact, using `Servant.Client.Free` is a little simpler than defining a custom `RunClient` instance, especially for those cases where it is handy to have the full sequence of client calls and responses available for us to inspect, since `RunClient` only gives us access to one `Request` or `Response` at a time.

On the other hand, a “batch collection” of requests and/or responses can be achieved with both free clients and a custom `RunClient` instance rather easily, for example by using a `Writer [(Request, Response)] monad`.

Here is an example of running our small `test` against a running server:

```
Making request: Request {
  host           = "localhost"
  port           = 8000
  secure         = False
  requestHeaders = [("Accept", "application/json;charset=utf-8,application/json
↳")]
  path           = "/square/42"
  queryString    = ""
  method         = "GET"
  proxy          = Nothing
  rawBody        = False
  redirectCount  = 10
  responseTimeout = ResponseTimeoutDefault
  requestVersion = HTTP/1.1
}

Got response: Response
{ responseStatus = Status {statusCode = 200, statusMessage = "OK"}
, responseVersion = HTTP/1.1
, responseHeaders =
  [ ("Transfer-Encoding", "chunked")
  , ("Date", "Thu, 05 Jul 2018 21:12:41 GMT")
  , ("Server", "Warp/3.2.22")
  , ("Content-Type", "application/json;charset=utf-8")
```

(continues on next page)

(continued from previous page)

```

]
, responseBody = "1764"
, responseCookieJar = CJ {expose = []}
, responseClose' = ResponseClose
}

```

Expected 1764, got 1764

2.10 Customizing errors from Servant

Servant handles a lot of parsing and validation of the input request. When it can't parse something: query parameters, URL parts or request body, it will return appropriate HTTP codes like 400 Bad Request.

These responses will contain the error message in their body without any formatting. However, it is often desirable to be able to provide custom formatting for these error messages, for example, to wrap them in JSON.

Recently Servant got a way to add such formatting. This Cookbook chapter demonstrates how to use it.

Extensions and imports:

```

{-# LANGUAGE DataKinds           #-}
{-# LANGUAGE DeriveGeneric       #-}
{-# LANGUAGE OverloadedStrings   #-}
{-# LANGUAGE PolyKinds           #-}
{-# LANGUAGE TypeFamilies        #-}
{-# LANGUAGE TypeOperators       #-}

import      Data.Aeson
import      Data.Proxy
import      Data.Text
import      GHC.Generics
import      Network.Wai
import      Network.Wai.Handler.Warp

import      Servant

import      Data.String.Conversions
           (cs)
import      Servant.API.ContentTypes

```

The API (from `greet.hs` example in Servant sources):

```

-- | A greet message data type
newtype Greet = Greet { _msg :: Text }
  deriving (Generic, Show)

instance FromJSON Greet
instance ToJSON Greet

-- API specification
type TestApi =
  -- GET /hello/:name?capital={true, false} returns a Greet as JSON
  "hello"  => Capture "name" Text => QueryParam "capital" Bool => Get '[JSON]_
  ↪ Greet

```

(continues on next page)

(continued from previous page)

```

    -- POST /greet with a Greet as JSON in the request body,
    -- returns a Greet as JSON
    <|> "greet" :> ReqBody '[JSON] Greet :> Post '[JSON] Greet

    -- DELETE /greet/:greetid
    <|> "greet" :> Capture "greetid" Text :> Delete '[JSON] NoContent

testApi :: Proxy TestApi
testApi = Proxy

-- Server-side handlers.
--
-- There's one handler per endpoint, which, just like in the type
-- that represents the API, are glued together using <|>.
--
-- Each handler runs in the 'Handler' monad.
server :: Server TestApi
server = helloH <|> postGreetH <|> deleteGreetH

where helloH name Nothing = helloH name (Just False)
      helloH name (Just False) = return . Greet $ "Hello, " <> name
      helloH name (Just True) = return . Greet . toUpper $ "Hello, " <> name

      postGreetH greet = return greet

      deleteGreetH _ = return NoContent

```

2.10.1 Error formatters

servant-server provides an `ErrorFormatter` type to specify how the error message will be formatted. A formatter is just a function accepting three parameters:

- `TypeRep` from `Data.Typeable`: this is a runtime representation of the type of the combinator (like `Capture` or `ReqBody`) that generated the error. It can be used to display its name (with `show`) or even dynamically dispatch on the combinator type. See the docs for `Data.Typeable` and `Type.Reflection` modules.
- `Request`: full information for the request that led to the error.
- `String`: specific error message from the combinator.

The formatter is expected to produce a `ServerError` which will be returned from the handler.

Additionally, there is `NotFoundErrorMessageFormatter`, which accepts only `Request` and can customize the error in case when no route can be matched (HTTP 404).

Let's make two formatters. First one will wrap our error in a JSON:

```

{
  "error": "ERROR MESSAGE",
  "combinator": "NAME OF THE COMBINATOR"
}

```

Additionally, this formatter will examine the `Accept` header of the request and generate JSON message only if client can accept it.

```

customFormatter :: ErrorFormatter
customFormatter tr req err =
  let
    -- aeson Value which will be sent to the client
    value = object ["combinator" .= show tr, "error" .= err]
    -- Accept header of the request
    accH = getAcceptHeader req
  in
    -- handleAcceptH is Servant's function that checks whether the client can accept a
    -- certain message type.
    -- In this case we call it with "Proxy '[JSON]" argument, meaning that we want to
    ↪return a JSON.
    case handleAcceptH (Proxy :: Proxy '[JSON]) accH value of
      -- If client can't handle JSON, we just return the body the old way
      Nothing -> err400 { errBody = cs err }
      -- Otherwise, we return the JSON formatted body and set the "Content-Type" header.
      Just (ctypeH, body) -> err400
        { errBody = body
          , errHeaders = [("Content-Type", cs ctypeH)]
        }

notFoundFormatter :: NotFoundErrorFormatter
notFoundFormatter req =
  err404 { errBody = cs $ "Not found path: " <> rawPathInfo req }

```

If you don't need to react to the Accept header, you can just unconditionally return the JSON like this (with encode from Data.Aeson):

```

err400
  { errBody = encode body
    , errHeaders = [("Content-Type", "application/json")]
  }

```

2.10.2 Passing formatters to Servant

Servant uses the Context to configure formatters. You only need to add a value of type ErrorFormatters to your context. This is a record with the following fields:

- bodyParserErrorFormatter :: ErrorFormatter
- urlParseErrorFormatter :: ErrorFormatter
- headerParseErrorFormatter :: ErrorFormatter
- notFoundErrorFormatter :: NotFoundErrorFormatter

Default formatters are exported as defaultErrorFormatters, so you can use record update syntax to set the only ones you need:

```

customFormatters :: ErrorFormatters
customFormatters = defaultErrorFormatters
  { bodyParserErrorFormatter = customFormatter
    , notFoundErrorFormatter = notFoundFormatter
  }

```

And at last, use serveWithContext to run your server as usual:

```
app :: Application
app = serveWithContext testApi (customFormatters :: EmptyContext) server

main :: IO ()
main = run 8000 app
```

Now if we try to request something with a wrong body, we will get a nice error:

```
$ http -j POST localhost:8000/greet 'foo=bar'
HTTP/1.1 400 Bad Request
Content-Type: application/json;charset=utf-8
Date: Fri, 17 Jul 2020 13:34:18 GMT
Server: Warp/3.3.12
Transfer-Encoding: chunked

{
  "combinator": "ReqBody",
  "error": "Error in $: parsing Main.Greet (Greet) failed, key \"_msg\" not found"
}
```

Notice the Content-Type header set by our combinator.

2.11 Listing alternative responses and exceptions in your API types

Servant allows you to talk about the exceptions you throw in your API types. This is not limited to actual exceptions, you can write handlers that respond with arbitrary open unions of types.

2.11.1 Compatibility

:warning: This cookbook is compatible with GHC 8.6.1 or higher :warning:

2.11.2 Preliminaries

```
{-# LANGUAGE ConstraintKinds #-}
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE DeriveGeneric #-}
{-# LANGUAGE DerivingStrategies #-}
{-# LANGUAGE DeriveAnyClass #-}
{-# LANGUAGE DerivingVia #-}
{-# LANGUAGE FlexibleContexts #-}
{-# LANGUAGE FlexibleInstances #-}
{-# LANGUAGE GeneralizedNewtypeDeriving #-}
{-# LANGUAGE InstanceSigs #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE OverloadedStrings #-}
{-# LANGUAGE ScopedTypeVariables #-}
{-# LANGUAGE StandaloneDeriving #-}
{-# LANGUAGE TypeApplications #-}
{-# LANGUAGE TypeFamilies #-}
{-# LANGUAGE TypeOperators #-}
{-# LANGUAGE UndecidableInstances #-}
{-# OPTIONS_GHC -Wall -Wno-orphans #-}
```

(continues on next page)

(continued from previous page)

```

import Control.Concurrent (threadDelay)
import Control.Concurrent.Async (async)
import Control.Monad (when)
import Control.Monad.Except (ExceptT (..), MonadError (..), MonadTrans (..),
↳runExceptT)
import Data.Aeson (FromJSON (..), ToJSON (..))
import Data.Aeson.Encode.Pretty (encodePretty)
import Data.String.Conversions (cs)
import Data.Swagger (ToSchema)
import Data.Typeable (Proxy (Proxy))
import qualified GHC.Generics as GHC
import qualified Network.HTTP.Client as Client
import qualified Network.Wai.Handler.Warp as Warp
import Servant.API
import Servant.Client
import Servant.Server
import Servant.Swagger

```

2.11.3 The API

This looks like a Verb-based routing table, except that UVerb has no status, and carries a list of response types rather than a single one. Each entry in the list carries its own response code.

```

type API =
  "fixx"  => Capture "bool" Bool
         := UVerb 'GET' '[JSON]' '[FisxUser, WithStatus 303 String]
  "<|>" "arian"
         := UVerb 'GET' '[JSON]' '[WithStatus 201 ArianUser]

```

Here are the details:

```

data FisxUser = FisxUser {name :: String}
  deriving (Eq, Show, GHC.Generic)

instance ToJSON FisxUser
instance FromJSON FisxUser
instance ToSchema FisxUser

-- | 'HasStatus' allows us to can get around 'WithStatus' if we want
-- to, and associate the status code with our resource types directly.
--
-- (To avoid orphan instances and make it more explicit what's in the
-- API and what isn't, we could even introduce a newtype 'Resource'
-- that wraps all the types we're using in our routing table, and then
-- define lots of 'HasStatus' instances for @Resource This@ and
-- @Resource That@.)
instance HasStatus FisxUser where
  type StatusOf FisxUser = 203

data ArianUser = ArianUser
  deriving (Eq, Show, GHC.Generic)

instance ToJSON ArianUser

```

(continues on next page)

(continued from previous page)

```
instance FromJSON ArianUser
instance ToSchema ArianUser
```

2.11.4 Server, Client, Swagger

You can just respond with any of the elements of the union in handlers.

```
fixx :: Bool -> Handler (Union '[FisxUser, WithStatus 303 String])
fixx True = respond (FisxUser "fixx")
fixx False = respond (WithStatus @303 ("still fixx" :: String))

arian :: Handler (Union '[WithStatus 201 ArianUser])
arian = respond (WithStatus @201 ArianUser)
```

You can create client functions like you're used to:

```
fixxCliet :: Bool -> ClientM (Union '[FisxUser, WithStatus 303 String])
arianClient :: ClientM (Union '[WithStatus 201 ArianUser])
(fixxCliet :<|> arianClient) = client (Proxy @API)
```

... and that's basically it! Here are a few sample commands that show you how the swagger docs look like and how you can handle the result unions in clients:

```
main :: IO ()
main = do
  putStrLn . cs . encodePretty $ toSwagger (Proxy @API)
  _ <- async . Warp.run 8080 $ serve (Proxy @API) (fixx :<|> arian)
  threadDelay 50000
  mgr <- Client.newManager Client.defaultManagerSettings
  let cenv = mkClientEnv mgr (BaseUrl Http "localhost" 8080 "")
      result <- runClientM (fixxCliet True) cenv
      print $ foldMapUnion (Proxy @Show) show <$> result
      print $ matchUnion @FisxUser <$> result
      print $ matchUnion @(WithStatus 303 String) <$> result
  pure ()
```

2.11.5 Idiomatic exceptions

Since `UVerb` (probably) will mostly be used for error-like responses, it may be desirable to be able to early abort handler, like with current servant one would use `throwError` with `ServerError`.

```
newtype UVerbT xs m a = UVerbT { unUVerbT :: ExceptT (Union xs) m a }
  deriving (Functor, Applicative, Monad, MonadTrans)

-- | Deliberately hide 'ExceptT's 'MonadError' instance to be able to use
-- underlying monad's instance.
instance MonadError e m => MonadError e (UVerbT xs m) where
  throwError = lift . throwError
  catchError (UVerbT act) h = UVerbT $ ExceptT $
    runExceptT act `catchError` (runExceptT . unUVerbT . h)

-- | This combinator runs 'UVerbT'. It applies 'respond' internally, so the handler
-- may use the usual 'return'.
```

(continues on next page)

(continued from previous page)

```
runUVerbT :: (Monad m, HasStatus x, IsMember x xs) => UVerbT xs m x -> m (Union xs)
runUVerbT (UVerbT act) = either id id <$> runExceptT (act >>= respond)

-- | Short-circuit 'UVerbT' computation returning one of the response types.
throwUVerb :: (Monad m, HasStatus x, IsMember x xs) => x -> UVerbT xs m a
throwUVerb = UVerbT . ExceptT . fmap Left . respond
```

Example usage:

```
data Foo = Foo Int Int Int
  deriving (Show, Eq, GHC.Generic, ToJSON)
  deriving HasStatus via WithStatus 200 Foo

data Bar = Bar
  deriving (Show, Eq, GHC.Generic)

instance ToJSON Bar

h :: Handler (Union '[Foo, WithStatus 400 Bar])
h = runUVerbT $ do
  when ({- something bad -} True) $
    throwUVerb $ WithStatus @400 Bar

  when ({- really bad -} False) $
    throwError $ err500

  -- a lot of code here...

  return $ Foo 1 2 3
```

2.11.6 Related Work

There is the [issue from 2017](#) that was resolved by the introduction of `UVerb`, with a long discussion on alternative designs.

[servant-checked-exceptions](#) is a good solution to the problem, but it restricts the user to JSON and a very specific envelop encoding for the union type, which is often not acceptable. (One good reason for this design choice is that it makes writing clients easier, where you need to get to the union type from one representative, and you don't want to run several parsers in the hope that the ones that should will always error out so you can try until the right one returns a value.)

[servant-exceptions](#) is another shot at the problem. It is inspired by [servant-checked-exceptions](#), so it may be worth taking a closer look. The README claims that [cardano-sl](#) also has some code for generalized error handling.

In an earlier version of the `UVerb` implementation, we have used some code from [world-peace](#), but that package itself wasn't flexible enough, and we had to use [sop-core](#) to implement the `HasServer` instance.

Here is a blog post we found on the subject: <https://lukwagoallan.com/posts/unifying-servant-server-error-responses>

(If you have anything else, please add it here or let us know.)

```
main :: IO ()
main = return ()
```


2.12 Basic Authentication

Let's see a simple example of a web application with a single endpoint, protected by Basic Authentication.

First, some throat clearing.

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE OverloadedStrings #-}
{-# LANGUAGE TypeOperators #-}
import Control.Concurrent
import Control.Exception
import qualified Data.Map as Map
import qualified Data.Text as T
import Data.Text.Encoding (decodeUtf8)
import Network.HTTP.Client (newManager, defaultManagerSettings)
import Network.Wai.Handler.Warp
import Servant
import Servant.Client
```

We will be dealing with a very simple model of users, as shown below. Our “user database” will just be a map from usernames to full user details. For the sake of simplicity, it will just be read only but the same code could be used with mutable references, database connections, files and more in place of our Map.

```
type Username = T.Text
type Password = T.Text
type Website = T.Text

data User = User
  { user :: Username
  , pass :: Password
  , site :: Website
  } deriving (Eq, Show)

-- could be a postgres connection, a file, anything.
type UserDB = Map.Map Username User

-- create a "database" from a list of users
createUserDB :: [User] -> UserDB
createUserDB users = Map.fromList [ (user u, u) | u <- users ]

-- our test database
userDB :: UserDB
userDB = createUserDB
  [ User "john" "shhhh" "john.com"
  , User "foo" "bar" "foobar.net"
  ]
```

Our API will contain a single endpoint, returning the authenticated user's own website.

```
-- a 'GET /mysite' endpoint, protected by basic authentication
type API = BasicAuth "People's websites" User :> "mysite" :> Get '[JSON] Website

{- if there were more endpoints to be protected, one could write:
type API = BasicAuth "People's websites" User :>
  ( "foo" :> Get '[JSON] Foo
  :</> "bar" :> Get '[JSON] Bar
  )
```

(continues on next page)

```

-}

api :: Proxy API
api = Proxy

server :: Server API
server usr = return (site usr)

```

In order to protect our endpoint ("mysite" :> Get '[JSON] Website), we simply drop the `BasicAuth` combinator in front of it. Its first parameter, "People's websites" in our example, is the realm, which is an arbitrary string identifying the protected resources. The second parameter, `User` in our example, corresponds to the type we want to use to represent authenticated users. It could be anything.

When using `BasicAuth` in an API, the server implementation “gets” an argument of the authenticated user type used with `BasicAuth`, `User` in our case, in the “corresponding spot”. In this example, the server implementation simply returns the `site` field of the authenticated user. More realistic applications would have endpoints that take other arguments and where a lot more logic would be implemented. But in a sense, `BasicAuth` adds an argument just like `Capture`, `QueryParam`, `ReqBody` and friends. But instead of performing some form of decoding logic behind the scenes, servant runs some “basic auth check” that the user provides.

In our case, we need access to our user database, so we simply take it as an argument. A more serious implementation would probably take a database connection or even a connection pool.

```

-- provided we are given a user database, we can supply
-- a function that checks the basic auth credentials
-- against our database.
checkBasicAuth :: UserDB -> BasicAuthCheck User
checkBasicAuth db = BasicAuthCheck $ \basicAuthData ->
  let username = decodeUtf8 (basicAuthUsername basicAuthData)
      password = decodeUtf8 (basicAuthPassword basicAuthData)
  in
  case Map.lookup username db of
    Nothing -> return NoSuchUser
    Just u   -> if pass u == password
                then return (Authorized u)
                else return BadPassword

```

This check simply looks up the user in the “database” and makes sure the right password was used. For reference, here are the definitions of `BasicAuthResult` and `BasicAuthCheck`:

```

-- | The result of authentication/authorization
data BasicAuthResult usr
  = Unauthorized
  | BadPassword
  | NoSuchUser
  | Authorized usr
  deriving (Eq, Show, Read, Generic, Typeable, Functor)

-- | Datatype wrapping a function used to check authentication.
newtype BasicAuthCheck usr = BasicAuthCheck
  { unBasicAuthCheck :: BasicAuthData
    -> IO (BasicAuthResult usr)
  }
  deriving (Generic, Typeable, Functor)

```

This is all great, but how is our `BasicAuth` combinator supposed to know that it should use our `checkBasicAuth` from above? The answer is that it simply expects to find a `BasicAuthCheck` value for the right user type in the

Context with which we serve the application, where `Context` is just servant's way to allow users to communicate some configuration of sorts to combinators. It is nothing more than an heterogeneous list and we can create a context with our auth check and run our application with it with the following code:

```
runApp :: UserDB -> IO ()
runApp db = run 8080 (serveWithContext api ctx server)

where ctx = checkBasicAuth db :: EmptyContext
```

`ctx` above is just a context with one element, `checkBasicAuth db`, whose type is `BasicAuthCheck User`. In order to say that we want to serve our application using the supplied context, we just have to use `serveWithContext` in place of `serve`.

Finally, let's derive a client to this endpoint as well in order to see our server in action!

```
getSite :: BasicAuthData -> ClientM Website
getSite = client api

main :: IO ()
main = do
  mgr <- newManager defaultManagerSettings
  bracket (forkIO $ runApp userDB) killThread $ \_ ->
    runClientM (getSite u) (mkClientEnv mgr (BaseUrl Http "localhost" 8080 ""))
    >>= print

where u = BasicAuthData "foo" "bar"
```

This program prints `Right "foobar.net"`, as expected. Feel free to change this code and see what happens when you specify credentials that are not in the database.

The entire program covered here is available as a literate Haskell file [here](#), along with a `cabal` project.

2.13 Streaming out-of-the-box

In other words, without streaming libraries.

2.13.1 Introduction

- Servant supports streaming
- Some basic usage doesn't require usage of streaming libraries, like `conduit`, `pipes`, `machines` or `streaming`. We have bindings for them though.
- Similar example is bundled with each of our streaming library interop packages (see `servant-pipes`, `servant-conduit` and `servant-machines`)
- `SourceT` doesn't have `Prelude` with handy combinators, so we have to write things ourselves. (Note to self: `mapM` and `foldM` would be handy to have).

2.13.2 Code

```
{-# LANGUAGE BangPatterns #-}
{-# LANGUAGE DataKinds   #-}
{-# LANGUAGE DeriveGeneric #-}
```

(continues on next page)

(continued from previous page)

```

{-# LANGUAGE TypeOperators #-}
module Main (main) where

import           Control.Concurrent
                (threadDelay)
import           Control.Monad.IO.Class
                (MonadIO (..))
import qualified Data.ByteString          as BS
import           Data.Maybe
                (fromMaybe)
import           Network.HTTP.Client
                (defaultManagerSettings, newManager)
import           Network.Wai
                (Application)
import           System.Environment
                (getArgs, lookupEnv)
import           Text.Read
                (readMaybe)

import           Servant
import           Servant.Client.Streaming
import qualified Servant.Types.SourceT as S

import qualified Network.Wai.Handler.Warp    as Warp

type FastAPI = "get"  => Capture "num" Int  => StreamGet NewlineFraming JSON (SourceIO_
->Int)

type API = FastAPI
  :<|> "slow"  => Capture "num" Int  => StreamGet NewlineFraming JSON (SourceIO Int)
  -- monad can be ResourceT IO too.
  :<|> "readme" => StreamGet NoFraming OctetStream (SourceIO BS.ByteString)
  -- we can have streaming request body
  :<|> "proxy"
    :> StreamBody NoFraming OctetStream (SourceIO BS.ByteString)
    :> StreamPost NoFraming OctetStream (SourceIO BS.ByteString)

api :: Proxy API
api = Proxy

server :: Server API
server = fast :<|> slow :<|> readme :<|> proxy where
  fast n = liftIO $ do
    putStrLn $ "/get/" ++ show n
    return $ fastSource n

  slow n = liftIO $ do
    putStrLn $ "/slow/" ++ show n
    return $ slowSource n

  readme = liftIO $ do
    putStrLn "/proxy"
    return (S.readFile "README.md")

  proxy c = liftIO $ do
    putStrLn "/proxy"
    return c

```

(continues on next page)

(continued from previous page)

```

-- for some reason unfold leaks?
fastSource = S.fromStepT . mk where
  mk m
    | m < 0      = S.Stop
    | otherwise = S.Yield m (mk (m - 1))

slowSource m = S.mapStepT delay (fastSource m) where
  delay S.Stop      = S.Stop
  delay (S.Error err) = S.Error err
  delay (S.Skip s)   = S.Skip (delay s)
  delay (S.Effect ms) = S.Effect (fmap delay ms)
  delay (S.Yield x s) = S.Effect $
    S.Yield x (delay s) <$ threadDelay 1000000

app :: Application
app = serve api server

cli :: Client ClientM FastAPI
cli :<|> _ :<|> _ :<|> _ = client api

main :: IO ()
main = do
  args <- getArgs
  case args of
    ("server":_) -> do
      putStrLn "Starting cookbook-basic-streaming at http://localhost:8000"
      port <- fromMaybe 8000 . (>= readMaybe) <$> lookupEnv "PORT"
      Warp.run port app
    ("client":ns:_) -> do
      n <- maybe (fail $ "not a number: " ++ ns) pure $ readMaybe ns
      mgr <- newManager defaultManagerSettings
      burl <- parseBaseUrl "http://localhost:8000/"
      withClientM (cli n) (mkClientEnv mgr burl) $ \me -> case me of
        Left err -> print err
        Right src -> do
          x <- S.unSourceT src (go (0 :: Int))
          print x
          where
            go !acc S.Stop      = return acc
            go !acc (S.Error err) = print err >> return acc
            go !acc (S.Skip s)   = go acc s
            go !acc (S.Effect ms) = ms >>= go acc
            go !acc (S.Yield _ s) = go (acc + 1) s
    _ -> do
      putStrLn "Try:"
      putStrLn "cabal new-run cookbook-basic-streaming server"
      putStrLn "cabal new-run cookbook-basic-streaming client 10"
      putStrLn "time curl -H 'Accept: application/json' localhost:8000/slow/5"

```

2.14 Combining JWT-based authentication with basic access authentication

In this example we will make a service with [basic HTTP authentication](#) for Haskell clients and other programs, as well as with [JWT-based authentication](#) for web browsers. Web browsers will still use basic HTTP authentication to retrieve JWTs though.

Warning: this is insecure when done over plain HTTP, so [TLS](#) should be used. See [warp-tls](#) for that.

While basic authentication comes with Servant itself, [servant-auth](#) and [servant-auth-server](#) packages are needed for the JWT-based one.

This recipe uses the following ingredients:

```
{-# LANGUAGE OverloadedStrings, TypeFamilies, DataKinds,
     DeriveGeneric, TypeOperators #-}
import Data.Aeson
import GHC.Generics
import Data.Proxy
import System.IO
import Network.HTTP.Client (newManager, defaultManagerSettings)
import Network.Wai.Handler.Warp
import Servant as S
import Servant.Client
import Servant.Auth as SA
import Servant.Auth.Server as SAS
import Control.Monad.IO.Class (liftIO)
import Data.Map as M
import Data.ByteString (ByteString)

port :: Int
port = 3001
```

2.14.1 Authentication

Below is how we'll represent a user: usually user identifier is handy to keep around, along with their role if [role-based access control](#) is used, and other commonly needed information, such as an organization identifier:

```
data AuthenticatedUser = AUser { auID :: Int
                                , auOrgID :: Int
                                } deriving (Show, Generic)
```

The following instances are needed for JWT:

```
instance ToJSON AuthenticatedUser
instance FromJSON AuthenticatedUser
instance ToJWT AuthenticatedUser
instance FromJWT AuthenticatedUser
```

We'll have to use a bit of imagination to pretend that the following `Map` is a database connection pool:

```
type Login      = ByteString
type Password   = ByteString
type DB         = Map (Login, Password) AuthenticatedUser
type Connection = DB
```

(continues on next page)

(continued from previous page)

```
type Pool a      = a

initConnPool :: IO (Pool Connection)
initConnPool = pure $ fromList [ ("user", "pass"), AUser 1 1)
                                , ("user2", "pass2"), AUser 2 1) ]
```

See the “PostgreSQL connection pool” recipe for actual connection pooling, and we proceed to an authentication function that would use our improvised DB connection pool and credentials provided by a user:

```
authCheck :: Pool Connection
           -> BasicAuthData
           -> IO (AuthResult AuthenticatedUser)
authCheck connPool (BasicAuthData login password) = pure $
  maybe SAS.Indefinite Authenticated $ M.lookup (login, password) connPool
```

Warning: make sure to use a proper password hashing function in functions like this: see `bcrypt`, `scrypt`, `pgcrypto`.

Unlike `Servant.BasicAuth`, `Servant.Auth` uses `FromBasicAuthData` type class for the authentication process itself. But since our connection pool will be initialized elsewhere, we’ll have to pass it somehow: it can be done via a context entry and `BasicAuthCfg` type family. We can actually pass a function at once, to make it a bit more generic:

```
type instance BasicAuthCfg = BasicAuthData -> IO (AuthResult AuthenticatedUser)

instance FromBasicAuthData AuthenticatedUser where
  fromBasicAuthData authData authCheckFunction = authCheckFunction authData
```

2.14.2 API

Test API with a couple of endpoints:

```
type TestAPI = "foo" :> Capture "i" Int :> Get '[JSON] ()
              :<|> "bar" :> Get '[JSON] ()
```

We’ll use this for server-side functions, listing the allowed authentication methods using the `Auth` combinator:

```
type TestAPIServer =
  Auth '[SA.JWT, SA.BasicAuth] AuthenticatedUser :> TestAPI
```

But `Servant.Auth.Client` only supports JWT-based authentication, so we’ll have to use regular `Servant.BasicAuth` to derive client functions that use basic access authentication:

```
type TestAPIClient = S.BasicAuth "test" AuthenticatedUser :> TestAPI
```

2.14.3 Client

Client code in this setting is the same as it would be with just `Servant.BasicAuth`, using `servant-client`:

```
testClient :: IO ()
testClient = do
  mgr <- newManager defaultManagerSettings
  let (foo :<|> _) = client (Proxy :: Proxy TestAPIClient)
                        (BasicAuthData "name" "pass")
```

(continues on next page)

(continued from previous page)

```
res <- runClientM (foo 42)
  (mkClientEnv mgr (BaseUrl Http "localhost" port ""))
hPutStrLn stderr $ case res of
  Left err -> "Error: " ++ show err
  Right r -> "Success: " ++ show r
```

2.14.4 Server

Server code is slightly different – we’re getting `AuthResult` here:

```
server :: Server TestAPIServer
server (Authenticated user) = handleFoo <|> handleBar
  where
    handleFoo :: Int -> Handler ()
    handleFoo n = liftIO $ hPutStrLn stderr $
      concat ["foo: ", show user, " / ", show n]
    handleBar :: Handler ()
    handleBar = liftIO testClient
```

Catch-all for `BadPassword`, `NoSuchUser`, and `Indefinite`:

```
server _ = throwAll err401
```

With `Servant.Auth`, we’ll have to put both `CookieSettings` and `JWTSettings` into context even if we’re not using those, and we’ll put a partially applied `authCheck` function there as well, so that `FromBasicAuthData` will be able to use it, while it will use our connection pool. Otherwise it is similar to the usual way:

```
mkApp :: Pool Connection -> IO Application
mkApp connPool = do
  myKey <- generateKey
  let jwtCfg = defaultJWTSettings myKey
      authCfg = authCheck connPool
      cfg = jwtCfg .. defaultCookieSettings .. authCfg .. EmptyContext
      api = Proxy :: Proxy TestAPIServer
  pure $ serveWithContext api cfg server
```

Finally, the main function:

```
main :: IO ()
main = do
  connPool <- initConnPool
  let settings =
      setPort port $
      setBeforeMainLoop (hPutStrLn stderr
        ("listening on port " ++ show port)) $
      defaultSettings
  runSettings settings =<< mkApp connPool
```

2.14.5 Usage

Now we can try it out with `curl`. First of all, let’s ensure that it fails with `err401` if we’re not authenticated:


```

import Control.Monad.IO.Class (liftIO)
import Control.Monad.Reader
import Data.Aeson
import Data.Default
import Data.Proxy
import Data.Text
import Data.Time.Clock ( UTCTime, getCurrentTime )
import GHC.Generics
import Network.Wai (Middleware)
import Network.Wai.Handler.Warp as Warp
import Network.Wai.Middleware.RequestLogger
import Network.Wai.Middleware.RequestLogger.JSON
import Servant as S
import Servant.Auth as SA
import Servant.Auth.Server as SAS
import System.Log.FastLogger
                                ( ToLogStr(..)
                                , LoggerSet
                                , defaultBufSize
                                , newStdoutLoggerSet
                                , flushLogStr
                                , pushLogStrLn )

port :: Int
port = 3001

```

2.15.1 Custom Monad

Let's say we'd like to create a custom monad based on `ReaderT env` in order to hold access to a config object as well as some logging utilities.

With that, we could define an `AppCtx` and `AppM` like this:

```

type AppM = ReaderT AppCtx Handler

data AppCtx = AppCtx {
  _getConfig  :: SiteConfig
  , _getLogger :: LoggerSet
}

data SiteConfig = SiteConfig {
  environment  :: !Text
  , version    :: !Text
  , adminUsername :: !Text
  , adminPasswd  :: !Text
} deriving (Generic, Show)

```

This `SiteConfig` is a simple example: it refers to our deployment environment as well as an application version. For instance, we may do something different based on the environment our app is deployed into. When emitting log messages, we may want to include information about the deployed version of our application.

In addition, we're going to identify a single admin user in our config and use that definition to authenticate requests inside our handlers. This is not too flexible (and probably not too secure...), but it works as a simple example.

2.15.2 Logging

A common contemporary pattern is to emit log messages as JSON for later ingestion into a database like Elasticsearch.

To emit JSON log messages, we'll create a `LogMessage` object and make it so we can turn it into a JSON-encoded `LogStr` (a type from `fast-logger`).

```
data LogMessage = LogMessage {
  message      :: !Text
  , timestamp  :: !UTCTime
  , level      :: !Text
  , lversion   :: !Text
  , lenvironment :: !Text
} deriving (Eq, Show, Generic)

instance FromJSON LogMessage
instance ToJSON LogMessage where
  toEncoding = genericToEncoding defaultOptions

instance ToLogStr LogMessage where
  toLogStr = toLogStr . encode
```

Eventually, when we'd like to emit a log message inside one of our Handlers, it'll look like this:

```
sampleHandler :: AppM LogMessage
sampleHandler = do
  config <- asks _getConfig
  logset <- asks _getLogger

  tstamp <- liftIO getCurrentTime
  let logMsg = LogMessage { message = "let's do some logging!"
                        , timestamp = tstamp
                        , level = "info"
                        , lversion = version config
                        , lenvironment = environment config
                        }

  -- emit log message
  liftIO $ pushLogStrLn logset $ toLogStr logMsg
  -- return handler result (for simplicity, result is also a LogMessage)
  pure logMsg
```

2.15.3 Authentication

To demonstrate the other part of this recipe, we are going to use a simple representation of a user, someone who may have access to an admin section of our site:

```
data AdminUser = AdminUser { name :: Text }
deriving (Eq, Show, Read, Generic)
```

The following instances are needed for JWT:

```
instance ToJSON AdminUser
instance FromJSON AdminUser
instance SAS.ToJWT AdminUser
instance SAS.FromJWT AdminUser
```

2.15.4 API

Now we can define our API.

We'll have an admin endpoint and a login endpoint that takes a LoginForm:

```
type AdminApi =
  "admin" :> Get '[JSON] LogMessage

type LoginApi =
  "login"
  :> ReqBody '[JSON] LoginForm
  :> Post '[JSON] (Headers '[ Header "Set-Cookie" SetCookie, Header "Set-Cookie"
↳SetCookie] LogMessage)

data LoginForm = LoginForm {
  username :: Text
  , password :: Text
} deriving (Eq, Show, Generic)

instance ToJSON LoginForm
instance FromJSON LoginForm
```

We can combine both APIs into one like so:

```
type AdminAndLogin auths = (SAS.Auth auths AdminUser :> AdminApi) :<|> LoginApi
```

2.15.5 Server

When we define our server, we'll have to define handlers for the AdminApi and the LoginApi and we'll have to supply JWTSettings and CookieSettings so our login handler can authenticate users:

```
adminServer :: SAS.CookieSettings -> SAS.JWTSettings -> ServerT (AdminAndLogin auths)
↳AppM
adminServer cs jwt = adminHandler :<|> loginHandler cs jwt
```

The admin route should receive an authenticated AdminUser as an argument or it should return a 401:

```
adminHandler :: AuthResult AdminUser -> AppM LogMessage
adminHandler (SAS.Authenticated adminUser) = do
  config <- asks _getConfig
  logset <- asks _getLogger

  tstamp <- liftIO getCurrentTime
  let logMsg = LogMessage { message = "Admin User accessing admin: " <> name
↳adminUser
                                , timestamp = tstamp
                                , level = "info"
                                , lversion = version config
                                , lenvironment = environment config
                                }
      -- emit log message
      liftIO $ pushLogStrLn logset $ toLogStr logMsg
      -- return handler result (for simplicity, result is a LogMessage)
      pure logMsg
  adminHandler _ = throwError err401
```

By contrast, the login handler is waiting for a POST with a login form.

If login is successful, it will set session cookies and return a value.

Here we're going to include lots of log messages:

```
loginHandler :: CookieSettings
              -> JWTSettings
              -> LoginForm
              -> AppM (Headers '[ Header "Set-Cookie" SetCookie, Header "Set-Cookie" _
↳SetCookie] LogMessage)
loginHandler cookieSettings jwtSettings form = do
  config    <- asks _getConfig
  logset    <- asks _getLogger

  tstamp   <- liftIO getCurrentTime
  let logMsg = LogMessage { message = "AdminUser login attempt failed!"
                          , timestamp = tstamp
                          , level = "info"
                          , lversion = version config
                          , lenvironment = environment config
                          }
  case validateLogin config form of
    Nothing -> do
      liftIO $ pushLogStrLn logset $ toLogStr logMsg
      throwError err401
    Just usr -> do
      mApplyCookies <- liftIO $ SAS.acceptLogin cookieSettings jwtSettings usr
      case mApplyCookies of
        Nothing -> do
          liftIO $ pushLogStrLn logset $ toLogStr logMsg
          throwError err401
        Just applyCookies -> do
          let successMsg = logMsg{message = "AdminUser successfully authenticated!"}
              liftIO $ pushLogStrLn logset $ toLogStr successMsg
              pure $ applyCookies successMsg
loginHandler _ _ _ = throwError err401

validateLogin :: SiteConfig -> LoginForm -> Maybe AdminUser
validateLogin config (LoginForm uname passwd ) =
  if (uname == adminUsername config) && (passwd == adminPasswd config)
  then Just $ AdminUser uname
  else Nothing
```

2.15.6 serveWithContext and hoistServerWithContext

In order to build a working server, we'll need to hoist our custom monad into Servant's Handler monad. We'll also need to pass in the proper context to ensure authentication will work.

This will require both `serveWithContext` and `hoistServerWithContext`.

Let's define the function which will create our Application:

```
adminLoginApi :: Proxy (AdminAndLogin '[JWT])
adminLoginApi = Proxy

mkApp :: Context '[SAS.CookieSettings, SAS.JWTSettings] -> CookieSettings -> _
↳JWTSettings -> AppCtx -> Application
```

(continues on next page)

(continued from previous page)

```
mkApp cfg cs jwtSettings ctx =
  serveWithContext adminLoginApi cfg $
    hoistServerWithContext adminLoginApi (Proxy :: Proxy '[SAS.CookieSettings, SAS.
↪JWTSettings])
    (flip runReaderT ctx) (adminServer cs jwtSettings)
```

One footnote: because we'd like our logs to be in JSON form, we'll also create a Middleware object so that Warp *also* will emit logs as JSON. This will ensure *all* logs are emitted as JSON:

```
jsonRequestLogger :: IO Middleware
jsonRequestLogger =
  mkRequestLogger $ def { outputFormat = CustomOutputFormatWithDetails formatAsJSON }
```

We now have all the pieces we need to serve our application inside a main function:

```
main :: IO ()
main = do
  -- typically, we'd create our config from environment variables
  -- but we're going to just make one here
  let config = SiteConfig "dev" "1.0.0" "admin" "secretPassword"

  warpLogger <- jsonRequestLogger
  appLogger <- newStdoutLoggerSet defaultBufSize

  tstamp <- getCurrentTime
  myKey <- generateKey

  let lgmsg = LogMessage {
      message = "My app starting up!"
    , timestamp = tstamp
    , level = "info"
    , lversion = version config
    , lenvironment = environment config
  }
  pushLogStrLn appLogger (toLogStr lgmsg) >> flushLogStr appLogger

  let ctx = AppCtx config appLogger

      warpSettings = Warp.defaultSettings
      portSettings = Warp.setPort port warpSettings
      settings = Warp.setTimeout 55 portSettings
      jwtCfg = defaultJWTSettings myKey
      cookieCfg = if environment config == "dev"
        then defaultCookieSettings{cookieIsSecure=SAS.NotSecure}
        else defaultCookieSettings
      cfg = cookieCfg :: jwtCfg :: EmptyContext

  Warp.runSettings settings $ warpLogger $ mkApp cfg cookieCfg jwtCfg ctx
```

2.15.7 Usage

Now we can run it and try it out with `curl`. In one terminal, let's run our application and see what our log output looks like:

```

{"message":"My app starting up!","timestamp":"2018-10-04T00:33:12.482568Z","level":
↪"info","lversion":"1.0.0","lenvironment":"dev"}

```

In another terminal, let's ensure that it fails with `err401` if we're not authenticated:

```

$ curl -v 'http://localhost:3001/admin'
...
< HTTP/1.1 401 Unauthorized

```

```

$ curl -v -XPOST 'http://localhost:3001/login' \
-H "Content-Type:application/json" \
-d '{"username": "bad", "password": "wrong"}'
...
< HTTP/1.1 401 Unauthorized

```

And in the other terminal with our log messages (from our JSON Middleware):

```

{"time":"03/Oct/2018:17:35:56 -0700","response":{"status":401,"size":null,"body":""},
↪"request":{"httpVersion":"1.1","path":"/admin","size":0,"body":"","durationMs":0.22,
↪"remoteHost":{"hostAddress":"127.0.0.1","port":51029},"headers":[{"Host",
↪"localhost:3001"}, ["User-Agent", "curl/7.60.0"], ["Accept", "*/*"]], "queryString": [],
↪"method":"GET"}}

```

Now let's see that authentication works, and that we get JWTs:

```

$ curl -v -XPOST 'http://localhost:3001/login' \
-H "Content-Type:application/json" \
-d '{"username": "admin", "password": "secretPassword"}'
...
< HTTP/1.1 200 OK
...
< Server: Warp/3.2.25
< Content-Type: application/json;charset=utf-8
< Set-Cookie: JWT-Cookie=eyJhbGciOiJIUzUxMiJ9.eyJkYXQiOiJ0bnRlZSI6ImFkbWluIn19.
↪SIOrcABKSO4mXnRifzqPw1HJUHVwuy32Qon7s1E_
↪c3vHosLXdXyX4V4eXOw9tMFoeIqgsXMZucqoFb36vAdKwQ; Path=/; HttpOnly; SameSite=Lax
< Set-Cookie: XSRF-TOKEN=y5PmrYHX3ywFUCwGRQqHh1TDheTLiQpwRQB3FFRd8N4=; Path=/
...
{"message":"AdminUser succesfully authenticated!","timestamp":"2018-10-04T00:37:44.
↪455441Z","level":"info","lversion":"1.0.0","lenvironment":"dev"}

```

And in the other terminal with our log messages (note that logging out passwords is insecure...):

```

{"message":"AdminUser succesfully authenticated!","timestamp":"2018-10-04T00:37:44.
↪455441Z","level":"info","lversion":"1.0.0","lenvironment":"dev"}
{"time":"03/Oct/2018:17:37:44 -0700","response":{"status":200,"size":null,"body":null}
↪,"request":{"httpVersion":"1.1","path":"/login","size":51,"body":{"\"username\": \
↪\"admin\", \"password\": \"secretPassword\""},"durationMs":0.23,"remoteHost":{"
↪\"hostAddress\":\"127.0.0.1\",\"port\":51044},"headers":[{"Host","localhost:3001"}, [\"User-
↪Agent\", \"curl/7.60.0\"], [\"Accept\", \"*/*\"], [\"Content-Type\", \"application/json\"], [
↪\"Content-Length\", \"51\"]], \"queryString\": [], \"method\": \"POST\"}}

```

Finally, let's make sure we can access a protected resource with our tokens:

```

$ export jwt=eyJhbGciOiJIUzUxMiJ9.eyJkYXQiOiJ0bnRlZSI6ImFkbWluIn19.
↪SIOrcABKSO4mXnRifzqPw1HJUHVwuy32Qon7s1E_
↪c3vHosLXdXyX4V4eXOw9tMFoeIqgsXMZucqoFb36vAdKwQ

```

(continues on next page)

(continued from previous page)

```
$ curl -v \
-H "Authorization: Bearer $jwt" \
'http://localhost:3001/admin'
...
< HTTP/1.1 200 OK
{"message":"Admin User accessing admin: admin","timestamp":"2018-10-04T00:58:07.
↪216605Z","level":"info","lversion":"1.0.0","lenvironment":"dev"}
```

And we should see this message logged-out as well:

```
{"message":"Admin User accessing admin: admin","timestamp":"2018-10-04T00:58:07.
↪216605Z","level":"info","lversion":"1.0.0","lenvironment":"dev"}
```

This program is available as a cabal project [here](#).

2.16 File Upload (multipart/form-data)

In this recipe, we will implement a web application with a single endpoint that can process `multipart/form-data` request bodies, which most commonly come from HTML forms that allow file upload.

As usual, a bit of throat clearing.

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE TypeOperators #-}
{-# LANGUAGE OverloadedStrings #-}

import Control.Concurrent
import Control.Exception
import Control.Monad
import Control.Monad.IO.Class
import Data.Text.Encoding (encodeUtf8)
import Network.Socket (withSocketsDo)
import Network.HTTP.Client hiding (Proxy)
import Network.HTTP.Client.MultipartFormData
import Network.Wai.Handler.Warp
import Servant
import Servant.Multipart

import qualified Data.ByteString.Lazy as LBS
```

Our API consists in a single POST endpoint at `/` that takes a `multipart/form-data` request body and pretty-prints the data it got to stdout before returning `0` (because why not).

```
type API = MultipartForm Mem (MultipartData Mem) -> Post '[JSON] Integer

api :: Proxy API
api = Proxy
```

Because of some technicalities, multipart form data is not represented as a good old content type like `JSON` in servant, that one could use with `ReqBody`, but instead is its own dedicated `ReqBody`-like combinator named `MultiPartForm`.

This combinator takes two parameters. The first one is the “backend” to use. Currently, you only have the choice between `Mem` and `Tmp`. The former loads the entire input in memory, even the uploaded files, while `Tmp` will stream uploaded files to some temporary directory.

The second parameter is the type you want the multipart data to be decoded to. Indeed there is a `FromMultipart` class that allows you to specify how to decode multipart form data from `MultipartData` to a custom type of yours. Here we use the trivial “decoding” to `MultipartData` itself, and simply will get our hands on the raw input. If you want to use a type of yours, see the documentation for `FromMultipart`.

Our only request handler has type `MultipartData Mem -> Handler Integer`. All it does is list the textual and file inputs that were sent in the multipart request body. The textual inputs are in the `inputs` field while the file inputs are in the `files` field of `multipartData`.

```
-- MultipartData consists in textual inputs,
-- accessible through its "inputs" field, as well
-- as files, accessible through its "files" field.
upload :: Server API
upload multipartData = do
  liftIO $ do
    putStrLn "Inputs:"
    forM_ (inputs multipartData) $ \input ->
      putStrLn $ " " ++ show (iName input)
        ++ " -> " ++ show (iValue input)

    forM_ (files multipartData) $ \file -> do
      let content = fdPayload file
          putStrLn $ "Content of " ++ show (fdFileName file)
          LBS.putStr content
      return 0

startServer :: IO ()
startServer = run 8080 (serve api upload)
```

Finally, a main function that brings up our server and sends some test request with `http-client` (and not `servant-client` this time, as `servant-multipart` does not yet have support for client generation).

```
main :: IO ()
main = withSocketsDo . bracket (forkIO startServer) killThread $ \_threadid -> do
  -- we fork the server in a separate thread and send a test
  -- request to it from the main thread.
  manager <- newManager defaultManagerSettings
  req <- parseRequest "http://localhost:8080/"
  resp <- flip httpLbs manager =<< formDataBody form req
  print resp

  where form =
    [ partBS "title" "World"
    , partBS "text" $ encodeUtf8 "Hello"
    , partFileSource "file" "./README.md"
    ]
```

If you run this, you should get:

```
$ cabal new-build cookbook-file-upload
[...]
$ dist-newstyle/build/x86_64-linux/ghc-8.2.1/cookbook-file-upload-0.1/x/cookbook-file-
↪upload/build/cookbook-file-upload/cookbook-file-upload
Inputs:
  "title" -> "World"
  "text" -> "Hello"
Content of "README.md"
# servant - A Type-Level Web DSL
```

(continues on next page)

```

![servant] (https://raw.githubusercontent.com/haskell-servant/servant/master/servant.
↳png)

## Getting Started

We have a [tutorial] (http://docs.servant.dev/en/stable/tutorial/index.html) that
introduces the core features of servant. After this article, you should be able
to write your first servant webservices, learning the rest from the haddocks'
examples.

[...]

Response {responseStatus = Status {statusCode = 200, statusMessage = "OK"},
↳responseVersion = HTTP/1.1, responseHeaders = [("Transfer-Encoding", "chunked"), (
↳"Date", "Fri, 08 Dec 2017 16:50:14 GMT"), ("Server", "Warp/3.2.13"), ("Content-Type",
↳"application/json;charset=utf-8")], responseBody = "0", responseCookieJar = CJ
↳{expose = []}, responseClose' = ResponseClose}

```

As usual, the code for this recipe is available in a cabal project [here](#).

2.17 Pagination

2.17.1 Overview

Let's see an approach to typed pagination with *Servant* using `servant-pagination`.

This module offers opinionated helpers to declare a type-safe and a flexible pagination mechanism for Servant APIs. This design, inspired by [Heroku's API](#), provides a small framework to communicate about a possible pagination feature of an endpoint, enabling a client to consume the API in different fashions (pagination with offset / limit, endless scroll using last referenced resources, ascending and descending ordering, etc.)

Therefore, client can provide a Range header with their request with the following format:

- Range: <field> [<value>][; offset <o>][; limit <l>][; order <asc|desc>]

For example: Range: createdAt 2017-01-15T23:14:67.000Z; offset 5; order desc indicates that the client is willing to retrieve the next batch of document in descending order that were created after the fifteenth of January, skipping the first 5.

As a response, the server may return the list of corresponding documents, and augment the response with 3 headers:

- Accept-Ranges: A comma-separated list of fields upon which a range can be defined
- Content-Range: Actual range corresponding to the content being returned
- Next-Range: Indicate what should be the next Range header in order to retrieve the next range

For example:

- Accept-Ranges: createdAt, modifiedAt
- Content-Range: createdAt 2017-01-15T23:14:51.000Z..2017-02-18T06:10:23.000Z
- Next-Range: createdAt 2017-02-19T12:56:28.000Z; offset 0; limit 100; order desc

2.17.2 Getting Started

Code-wise the integration is quite seamless and unobtrusive. `servant-pagination` provides a `Ranges` (`fields :: [Symbol]`) (`resource :: *`) \rightarrow `*` data-type for declaring available ranges on a group of *fields* and a target *resource*. To each combination (`resource` + `field`) is associated a given type `RangeType` (`resource :: *`) (`field :: Symbol`) \rightarrow `*` as described by the type-family in the `HasPagination` type-class.

So, let's start with some imports and extensions to get this out of the way:

```
{-# LANGUAGE DataKinds           #-}
{-# LANGUAGE DeriveGeneric      #-}
{-# LANGUAGE FlexibleInstances   #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE TypeApplications   #-}
{-# LANGUAGE TypeFamilies       #-}
{-# LANGUAGE TypeOperators      #-}

import           Data.Aeson
                (ToJSON, genericToJSON)
import           Data.Maybe
                (fromMaybe)
import           Data.Proxy
                (Proxy (..))
import           GHC.Generics
                (Generic)
import           Servant
                ((:>), GetPartialContent, Handler, Header, Headers, JSON, Server,
↳addHeader)
import           Servant.Pagination
                (HasPagination (..), PageHeaders, Range (..), Ranges, RangeOptions(..
↳),
                applyRange, extractRange, returnRange)

import qualified Data.Aeson           as Aeson
import qualified Network.Wai.Handler.Warp as Warp
import qualified Servant
import qualified Servant.Pagination   as Pagination
```

Declaring the Resource

Servant APIs are rather resource-oriented, and so is `servant-pagination`. This guide shows a basic example working with JSON (as you could tell from the import list already). To make the world a better colored place, let's create an API to retrieve colors – with pagination.

```
data Color = Color
  { name :: String
  , rgb  :: [Int]
  , hex  :: String
  } deriving (Eq, Show, Generic)

instance ToJSON Color where
  toJSON =
    genericToJSON Aeson.defaultOptions

colors :: [Color]
```

(continues on next page)

(continued from previous page)

```
colors =
  [ Color "Black" [0, 0, 0] "#000000"
  , Color "Blue" [0, 0, 255] "#0000ff"
  , Color "Green" [0, 128, 0] "#008000"
  , Color "Grey" [128, 128, 128] "#808080"
  , Color "Purple" [128, 0, 128] "#800080"
  , Color "Red" [255, 0, 0] "#ff0000"
  , Color "Yellow" [255, 255, 0] "#ffff00"
  ]
```

Declaring the Ranges

Now that we have defined our *resource* (a.k.a Color), we are ready to declare a new Range that will operate on a “name” field (genuinely named after the name fields from the Color record). For that, we need to tell servant-pagination two things:

- What is the type of the corresponding Range values
- How do we get one of these values from our resource

This is done via defining an instance of HasPagination as follows:

```
instance HasPagination Color "name" where
  type RangeType Color "name" = String
  getFieldValue _ = name
  -- getRangeOptions :: Proxy "name" -> Proxy Color -> RangeOptions
  -- getDefaultRange :: Proxy Color -> Range "name" String

defaultRange :: Range "name" String
defaultRange =
  getDefaultRange (Proxy @Color)
```

Note that getFieldValue :: Proxy "name" -> Color -> String is the minimal complete definition of the class. Yet, you can define getRangeOptions to provide different parsing options (see the last section of this guide). In the meantime, we’ve also defined a defaultRange as it will come in handy when defining our handler.

API

Good, we have a resource, we have a Range working on that resource, we can now declare our API using other Servant combinators we already know:

```
type API =
  "colors"
  :> Header "Range" (Ranges ["name"] Color)
  :> GetPartialContent '[JSON] (Headers MyHeaders [Color])

type MyHeaders =
  Header "Total-Count" Int ': PageHeaders ["name"] Color
```

PageHeaders is a type alias provided by the library to declare the necessary response headers we mentioned in introduction. Expanding the alias boils down to the following:

```
-- type MyHeaders =
-- '[ Header "Total-Count" Int
```

(continues on next page)

(continued from previous page)

```
-- , Header "Accept-Ranges" (AcceptRanges ["name"])
-- , Header "Content-Range" (ContentRange ["name"] Color)
-- , Header "Next-Range"    (Ranges ["name"] Color)
-- ]
```

As a result, we will need to provide all those headers with the response in our handler. Worry not, *servant-pagination* provides an easy way to lift a collection of resources into such handler.

Server

Time to connect the last bits by defining the server implementation of our colorful API. The `Ranges` type we've defined above (tied to the `Range` HTTP header) indicates the server to parse any `Range` header, looking for the format defined in introduction with fields and target types we have just declared. If no such header is provided, we will end up receiving `Nothing`. Otherwise, it will be possible to *extract* a `Range` from our `Ranges`.

```
server :: Server API
server = handler
  where
    handler :: Maybe (Ranges ["name"] Color) -> Handler (Headers MyHeaders [Color])
    handler mrange = do
      let range =
          fromMaybe defaultRange (mrange >>= extractRange)

          addHeader (length colors) <$> returnRange range (applyRange range colors)

main :: IO ()
main =
  Warp.run 1442 $ Servant.serve (Proxy @API) server
```

Let's try it out using different ranges to observe the server's behavior. As a reminder, here's the format we defined, where `<field>` here can only be name and `<value>` must parse to a `String`:

- Range: `<field> [<value>][; offset <o>][; limit <l>][; order <asc|desc>]`

Beside the target field, everything is pretty much optional in the `Range` HTTP header. Missing parts are deduced from the `RangeOptions` that are part of the `HasPagination` instance. Therefore, all following examples are valid requests to send to our server:

- 1 - `curl http://localhost:1442/colors -vH 'Range: name'`
- 2 - `curl http://localhost:1442/colors -vH 'Range: name; limit 2'`
- 3 - `curl http://localhost:1442/colors -vH 'Range: name Green; order asc; offset 1'`

Considering the following default options:

- `defaultRangeLimit: 100`
- `defaultRangeOffset: 0`
- `defaultRangeOrder: RangeDesc`

The previous ranges reads as follows:

- 1 - The first 100 colors, ordered by descending names
- 2 - The first 2 colors, ordered by descending names
- 3 - The 100 colors after `Green` (not included), ordered by ascending names.

2.17.3 Going Forward

Multiple Ranges

Note that in the simple above scenario, there's no ambiguity with `extractRange` and `returnRange` because there's only one possible `Range` defined on our resource. Yet, as you've most probably noticed, the `Ranges` combinator accepts a list of fields, each of which must declare a `HasPagination` instance. Doing so will make the other helper functions more ambiguous and type annotations are highly likely to be needed.

```
instance HasPagination Color "hex" where
  type RangeType Color "hex" = String
  getFieldValue _ = hex

-- to then define: Ranges ["name", "hex"] Color
```

Parsing Options

By default, `servant-pagination` provides an implementation of `getRangeOptions` for each `HasPagination` instance. However, this can be overridden when defining the instance to provide your own options. These options come into play when a `Range` header is received and isn't fully specified (`limit`, `offset`, `order` are all optional) to provide default fallback values for those.

For instance, let's say we wanted to change the default limit to 5 in a new range on `"rgb"`, we could tweak the corresponding `HasPagination` instance as follows:

```
instance HasPagination Color "rgb" where
  type RangeType Color "rgb" = Int
  getFieldValue _ = sum . rgb
  getRangeOptions _ _ = Pagination.defaultOptions { defaultRangeLimit = 5 }
```

2.18 Generating mock curl calls

In this example we will generate curl requests with mock post data from a servant API. This may be useful for testing and development purposes. Especially post requests with a request body are tedious to send manually.

Also, we will learn how to use the `servant-foreign` library to generate stuff from servant APIs.

Language extensions and imports:

```
{-# LANGUAGE DataKinds           #-}
{-# LANGUAGE DeriveGeneric       #-}
{-# LANGUAGE FlexibleContexts     #-}
{-# LANGUAGE FlexibleInstances    #-}
{-# LANGUAGE GeneralizedNewtypeDeriving #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE OverloadedStrings   #-}
{-# LANGUAGE RankNTypes          #-}
{-# LANGUAGE RecordWildCards     #-}
{-# LANGUAGE ScopedTypeVariables  #-}
{-# LANGUAGE TypeOperators       #-}

import           Control.Lens           ((^..))
import           Data.Aeson
import           Data.Aeson.Text
```

(continues on next page)

(continued from previous page)

```

import      Data.Proxy                (Proxy (Proxy))
import      Data.Text                 (Text)
import      Data.Text.Encoding        (decodeUtf8)
import qualified Data.Text.IO          as T.IO
import qualified Data.Text.Lazy        as LazyT
import      GHC.Generics
import      Servant                   ((:<|>), (:>), Get, JSON,
                                      Post, ReqBody)
import      Servant.Foreign           (Foreign, GenerateList,
                                      HasForeign, HasForeignType, Req,
                                      Segment, SegmentType (Cap, _
↳Static),
                                      argName, listFromAPI, path,
                                      reqBody, reqMethod, reqUrl, _
↳typeFor,
                                      unPathSegment, unSegment,)
import      Test.QuickCheck.Arbitrary
import      Test.QuickCheck.Arbitrary.Generic
import      Test.QuickCheck.Gen       (generate)
import qualified Data.Text             as T
    
```

Let's define our API:

```

type UserAPI = "users" :> Get '[JSON] [User]
              :<|> "new" :> "user" :> ReqBody '[JSON] User :> Post '[JSON] ()

data User = User
  { name :: String
  , age  :: Int
  , email :: String
  } deriving (Eq, Show, Generic)

instance Arbitrary User where
  arbitrary = genericArbitrary
  shrink    = genericShrink
instance ToJSON User
instance FromJSON User
    
```

Notice the `Arbitrary User` instance which we will later need to create mock data.

Also, the obligatory servant boilerplate:

```

api :: Proxy UserAPI
api = Proxy
    
```

2.18.1 servant-foreign and the HasForeignType Class

Servant-foreign allows us to look into the API we designed. The entry point is `listFromAPI` which takes three types and returns a list of endpoints:

```

listFromAPI :: (HasForeign lang ftype api, GenerateList ftype (Foreign ftype api)) => _
↳Proxy lang -> Proxy ftype -> Proxy api -> [Req ftype]
    
```

This looks a bit confusing... [Here](#) is the documentation for the `HasForeign` typeclass. We will not go into details here, but this allows us to create a value of type `ftype` for any type `a` in our API.

In our case we want to create a mock of every type `a`.

We create a new datatype that holds our mocked value. Well, not the mocked value itself. To mock it we need IO (random). So the promise of a mocked value after some IO is performed:

```
data NoLang
data Mocked = Mocked (IO Text)
```

Now, we create an instance of `HasForeignType` for `NoLang` and `Mocked` for every `a` that implements `ToJSON` and `Arbitrary`:

```
instance (ToJSON a, Arbitrary a) => HasForeignType NoLang Mocked a where
  typeFor _ _ _ =
    Mocked (genText (Proxy :: Proxy a))
```

What does `genText` do? It generates an arbitrary value of type `a` and encodes it as text. (And does some lazy to non-lazy text transformation we do not care about):

```
genText :: (ToJSON a, Arbitrary a) => Proxy a -> IO Text
genText p =
  fmap (\v -> LazyT.toStrict $ encodeToLazyText v) (genArb p)

genArb :: Arbitrary a => Proxy a -> IO a
genArb _ =
  generate arbitrary
```

Generating curl calls for every endpoint

Everything is prepared now and we can start generating some curl calls.

```
generateCurl :: (GenerateList Mocked (Foreign Mocked api), HasForeign NoLang Mocked_
->api)
=> Proxy api
-> Text
-> IO Text
generateCurl p host =
  fmap T.unlines body
  where
    body = mapM (generateEndpoint host)
      $ listFromAPI (Proxy :: Proxy NoLang) (Proxy :: Proxy Mocked) p
```

First, `listFromAPI` gives us a list of `Req Mocked`. Each `Req` describes one endpoint from the API type. We generate a curl call for each of them using the following helper.

```
generateEndpoint :: Text -> Req Mocked -> IO Text
generateEndpoint host req =
  case maybeBody of
    Just body ->
      body >>= \b -> return $ T.intercalate " " [ "curl", "-X", method, "-d", "" <>
->b <> ""
      , "-H 'Content-Type: application/json'"
-> ", host <> "/" <> url ]
    Nothing ->
      return $ T.intercalate " " [ "curl", "-X", method, host <> "/" <> url ]
  where
```

(continues on next page)

(continued from previous page)

```
method = decodeUtf8 $ req ^. reqMethod

url = T.intercalate "/" $ map segment (req ^. reqUrl . path)

maybeBody = fmap (\(Mocked io) -> io) (req ^. reqBody)
```

`servant-foreign` offers a multitude of lenses to be used with `Req`-values.

`reqMethod` gives us a straightforward `Network.HTTP.Types.Method`, `reqUrl` the url part and so on. Just take a look at [the docs](#).

But how do we get our mocked json string? This seems to be a bit too short to be true:

```
maybeBody = fmap (\(Mocked io) -> io) (req ^. reqBody)
```

But it is that simple! The docs say `reqBody` gives us a `Maybe f`. What is `f`, you ask? As defined in `generateCurl`, `f` is `Mocked` and contains a `IO Text`. How is this `Mocked` value created? The `HasForeignType :: typeFor` does it!

Of course only if the endpoint has a request body.

Some (incomplete) code for url segments:

```
segment :: Segment Mocked -> Text
segment seg =
  case unSegment seg of
    Static p ->
      unPathSegment p

    Cap arg ->
      -- Left as exercise for the reader: Mock args in the url
      unPathSegment $ arg ^. argName
```

And now, let's hook it all up in our main function:

```
main :: IO ()
main =
  generateCurl api "localhost:8081" >>= T.IO.putStrLn
```

Done:

```
curl -X GET localhost:8081/users
curl -X POST -d '{"email":"wV_b:z!(3DM V","age":10,"name":"=|W"}' -H 'Content-Type: application/json' localhost:8081/new/user
```

This is of course no complete curl call mock generator, many things including path arguments are missing. But it correctly generates mock calls for simple POST requests.

Also, we now know how to use `HasForeignType` and `listFromAPI` to generate anything we want.

2.19 Error logging with Sentry

In this recipe we will use [Sentry](#) to collect the runtime exceptions generated by our application. We will use the [raven-haskell](#) package, which is a client for a Sentry event server. Mind that this package is not present on [Stackage](#), so if we are using [Stack](#) we'll need to add it to our `extra-deps` section in the `stack.yaml` file.

To exemplify this we will need the following imports

```
{-# LANGUAGE DataKinds    #-}
{-# LANGUAGE TypeOperators #-}

import           Control.Exception           (Exception,
                                             SomeException, throw)
import           Data.ByteString.Char8      (unpack)
import           Network.Wai                (Request, rawPathInfo,
                                             requestHeaderHost)
import           Network.Wai.Handler.Warp   (defaultOnException,
                                             defaultSettings,
                                             runSettings,
                                             setOnException,
                                             setPort)

import           Servant
import           System.Log.Raven           (initRaven, register,
                                             silentFallback)
import           System.Log.Raven.Transport.HttpConduit (sendRecord)
import           System.Log.Raven.Types     (SentryLevel (Error),
                                             SentryRecord (..))
```

Just for the sake of the example we will use the following API which will throw an exception

```
type API = "break" :> Get '[JSON] ()

data MyException = MyException deriving (Show)

instance Exception MyException

server = breakHandler
  where breakHandler :: Handler ()
        breakHandler = do
          throw MyException
          return ()
```

First thing we need to do if we want to intercept and log this exception, we need to look in the section of our code where we run the warp application, and instead of using the simple `run` function from warp, we use the `runSettings` functions which allows to customise the handling of requests

```
main :: IO ()
main =
  let
    settings =
      setPort 8080 $
      setOnException sentryOnException $
      defaultSettings
  in
    runSettings settings $ serve (Proxy :: Proxy API) server
```

The definition of the `sentryOnException` function could look as follows

```
sentryOnException :: Maybe Request -> SomeException -> IO ()
sentryOnException mRequest exception = do
  sentryService <- initRaven
  "https://username:password@senty.host/id"
  id
  sendRecord
  silentFallback
```

(continues on next page)

(continued from previous page)

```

register
  sentryService
  "myLogger"
  Error
  (formatMessage mRequest exception)
  (recordUpdate mRequest exception)
  defaultOnException mRequest exception

```

It does three things. First it initializes the service which will communicate with Sentry. The parameters it receives are:

- the Sentry DSN, which is obtained when creating a new project on Sentry
- a default way to update sentry fields, where we use the identity function
- an event transport, which generally would be `sendRecord`, an HTTPS capable transport which uses http-conduit
- a fallback handler, which we choose to be `silentFallback` since later we are logging to the console anyway.

In the second step it actually sends our message to Sentry with the `register` function. Its arguments are:

- the configured Sentry service which we just created
- the name of the logger
- the error level (see [SentryLevel](#) for the possible options)
- the message we want to send
- an update function to handle the specific `SentryRecord`

Eventually it just delegates the error handling to the default warp mechanism.

The function `formatMessage` simply uses the request and the exception to return a string with the error message.

```

formatMessage :: Maybe Request -> SomeException -> String
formatMessage Nothing exception      = "Exception before request could be parsed: "
↳++ show exception
formatMessage (Just request) exception = "Exception " ++ show exception ++ " while
↳handling request " ++ show request

```

The only piece left now is the `recordUpdate` function which allows to decorate with other `attributes` the default `SentryRecord`.

```

recordUpdate :: Maybe Request -> SomeException -> SentryRecord -> SentryRecord
recordUpdate Nothing exception record      = record
recordUpdate (Just request) exception record = record
  { srCulprit = Just $ unpack $ rawPathInfo request
  , srServerName = fmap unpack $ requestHeaderHost request
  }

```

In this examples we set the raw path as the culprit and we use the `Host` header to populate the server name field.

You can try to run this code using the `cookbook-sentry` executable. You should obtain a `MyException` error in the console and, if you provided a valid Sentry DSN, you should also find your error in the Sentry interface.

2.20 How To Test Servant Applications

Even with a nicely structured API that passes Haskell's strict type checker, it's a good idea to write some tests for your application.

In this recipe we'll work through some common testing strategies and provide examples of utilizing these testing strategies in order to test Servant applications.

2.20.1 Testing strategies

There are many testing strategies you may wish to employ when testing your Servant application, but included below are three common testing patterns:

- We'll use `servant-client` to derive client functions and then send valid requests to our API, running in another thread. This is great for testing that our **business logic** is correctly implemented with only valid HTTP requests.
- We'll also use `hspec-wai` to make **arbitrary HTTP requests**, in order to test how our application may respond to invalid or otherwise unexpected requests.
- Finally, we can also use `servant-quickcheck` for **whole-API tests**, in order to assert that our entire application conforms to **best practices**.

2.20.2 Useful Libraries

The following libraries will often come in handy when we decide to test our Servant applications:

- `hspec`
- `hspec-wai`
- `QuickCheck`
- `servant-quickcheck`

2.20.3 Imports and Our Testing Module

This recipe starts with the following ingredients:

```
{-# LANGUAGE OverloadedStrings, TypeFamilies, DataKinds,
  DeriveGeneric, TypeOperators #-}
import           Prelude ()
import           Prelude.Compat

import qualified Control.Concurrent           as C
import           Control.Concurrent.MVar
import           Control.Exception           (bracket)
import           Control.Lens                hiding (Context)
import           Data.Aeson
import           Data.Aeson.Lens
import qualified Data.HashMap.Strict         as HM
import           Data.Text                   (Text, unpack)
import           GHC.Generics
import           Network.HTTP.Client         hiding (Proxy)
import           Network.HTTP.Types
import           Network.Wai
import qualified Network.Wai.Handler.Warp    as Warp

import           Servant
import           Servant.Client
import           Servant.Server
```

(continues on next page)

(continued from previous page)

```
import Servant.QuickCheck
import Servant.QuickCheck.Internal (serverDoesntSatisfy)

import Test.Hspec
import Test.Hspec.Wai
import Test.Hspec.Wai.Matcher
```

We're going to produce different Specs that represent different aspects of our application, and we'll ask hspec to run all of our different Specs. This is a common organizational method for testing modules:

```
spec :: Spec
spec = do
  businessLogicSpec
  thirdPartyResourcesSpec
  servantQuickcheckSpec
```

Often, codebases will use hspec's `autodiscover` pragma to find all testing modules and Specs inside, but we're going to explicitly make a main function to run our tests because we have only one spec defined above:

```
main :: IO ()
main = hspec spec
```

2.20.4 Testing Your Business Logic

Let's say we have an API that looks something like this:

```
data User = User {
  name :: Text
  , user_id :: Integer
} deriving (Eq, Show, Generic)

instance FromJSON User
instance ToJSON User

type UserApi =
  -- One endpoint: create a user
  "user" :> Capture "userId" Integer :> Post '[JSON] User
```

A real server would likely use a database to store, retrieve, and validate users, but we're going to do something really simple merely to have something to test. With that said, here's a sample handler, server, and Application for the endpoint described above:

```
userApp :: Application
userApp = serve (Proxy :: Proxy UserApi) userServer

userServer :: Server UserApi
userServer = createUser

createUser :: Integer -> Handler User
createUser userId = do
  if userId > 5000
  then pure $ User { name = "some user", user_id = userId }
  else throwError $ err400 { errBody = "userId is too small" }
```

Strategy 1: Spin Up a Server, Create a Client, Make Some Requests

One of the benefits of Servant's type-level DSL for describing APIs is that once you have provided a type-level description of your API, you can create clients, documentation, or other tools for it somewhat magically.

In this case, we'd like to *test* our server, so we can use `servant-client` to create a client, after which we'll run our server, and then make requests of it and see how it responds.

Let's write some tests:

```
withUserApp :: (Warp.Port -> IO ()) -> IO ()
withUserApp action =
  -- testWithApplication makes sure the action is executed after the server has
  -- started and is being properly shutdown.
  Warp.testWithApplication (pure userApp) action

businessLogicSpec :: Spec
businessLogicSpec =
  -- `around` will start our Server before the tests and turn it off after
  around withUserApp $ do
    -- create a test client function
    let createUser = client (Proxy :: Proxy UserApi)
        -- create a servant-client ClientEnv
        baseUrl <- runIO $ parseBaseUrl "http://localhost"
        manager <- runIO $ newManager defaultManagerSettings
        let clientEnv port = mkClientEnv manager (baseUrl { baseUrlPort = port })

    -- testing scenarios start here
    describe "POST /user" $ do
      it "should create a user with a high enough ID" $ \port -> do
        result <- runClientM (createUser 50001) (clientEnv port)
        result `shouldBe` (Right $ User { name = "some user", user_id = 50001})
      it "will it fail with a too-small ID?" $ \port -> do
        result <- runClientM (createUser 4999) (clientEnv port)
        result `shouldBe` (Right $ User { name = "some user", user_id = 50001})
```

Running These Tests

Let's run our tests and see what happens:

```
$ cabal new-test all
POST /user
  should create a user with a high enough ID
  should fail with a too-small ID FAILED [1]

Failures:

Testing.lhs:129:7:
  1) POST /user should fail with a too-small ID
     expected: Right (User {name = "some user", user_id = 50001})
     but got: Left (FailureResponse (Response {statusCode = Status
↳ {statusCode = 400, statusMessage = "Bad Request", responseHeaders = fromList [(
↳ "Transfer-Encoding", "chunked"), ("Date", "Fri, 12 Oct 2018 04:36:22 GMT"), ("Server",
↳ "Warp/3.2.25")], responseHttpVersion = HTTP/1.1, responseBody = "userId is too small
↳ })))
```

(continues on next page)

(continued from previous page)

```
To rerun use: --match "/POST /user/should fail with a too-small ID/"
```

Hmm. One passed and one failed! It looks like I *was* expecting a success response in the second test, but I actually got a failure. We should fix that, but first I'd like to introduce `hspec-wai`, which will give us different mechanisms for making requests of our application and validating the responses we get. We're also going to spin up a fake Elasticsearch server, so that our server can think it's talking to a real database.

2.20.5 Mocking 3rd Party Resources

Often our web applications will need to make their own web requests to other 3rd-party applications. These requests provide a lot of opportunity for failure and so we'd like to test that the right messages and failure values (in addition to success values) are returned from our application.

Define the 3rd-Party Resource

With Servant's type-level API definitions, assuming you've already defined the API you want to mock, it's relatively trivial to create a simple server for the purposes of running tests. For instance, consider an API server that needs to get data out of Elasticsearch. Let's first define the Elasticsearch server and client using Servant API descriptions:

```
type SearchAPI =
  -- We're using Aeson's Generic JSON `Value` to make things easier on
  -- ourselves. We're also representing only one Elasticsearch endpoint:
  -- get item by id
  "myIndex" :> "myDocType" :> Capture "docId" Integer :> Get '[JSON] Value

-- Here's our Servant Client function
getDocument = client (Proxy :: Proxy SearchAPI)

-- We can use these helpers when we want to make requests
-- using our client function
clientEnv :: Text -> Text -> IO ClientEnv
clientEnv esHost esPort = do
  baseUrl <- parseBaseUrl $ unpack $ esHost <> ":" <> esPort
  manager <- newManager defaultManagerSettings
  pure $ mkClientEnv manager baseUrl

runSearchClient :: Text -> Text -> ClientM a -> IO (Either ClientError a)
runSearchClient esHost esPort = (clientEnv esHost esPort >>=) . runClientM
```

Servant Server Example Using this 3rd-Party Resource

So we've got an Elasticsearch server and a client to talk to it. Let's now build a simple app server that uses this client to retrieve documents. This is somewhat contrived, but hopefully it illustrates the typical three-tier application architecture.

One note: we're also going to take advantage of `lens-aeson` here, which may look a bit foreign. The gist of it is that we're going to traverse a JSON `Value` from Elasticsearch and try to extract some kind of document to return.

Imagine, then, that this is our real server implementation:

```
type DocApi =
  "docs" :> Capture "docId" Integer :> Get '[JSON] Value
```

(continues on next page)

(continued from previous page)

```
docsApp :: Text -> Text -> Application
docsApp esHost esPort = serve (Proxy :: Proxy DocApi) $ docServer esHost esPort

docServer :: Text -> Text -> Server DocApi
docServer esHost esPort = getDocById esHost esPort

-- Our Handler tries to get a doc from Elasticsearch and then tries to parse
-- it. Unfortunately, there's a lot of opportunity for failure in these
-- actions
getDocById :: Text -> Text -> Integer -> Handler Value
getDocById esHost esPort docId = do
  -- Our Servant Client function returns Either ClientError Value here:
  docRes <- liftIO $ runSearchClient esHost esPort (getDocument docId)
  case docRes of
    Left err -> throwError $ err404 { errBody = "Failed looking up content" }
    Right value -> do
      -- we'll either fail to parse our document or we'll return it
      case value ^? _Object . ix "_source" of
        Nothing -> throwError $ err400 { errBody = "Failed parsing content" }
        Just obj -> pure obj
```

Testing Our Backend

So the above represents our application and is close to a server we may actually deploy. How then shall we test this application?

Ideally, we'd like it to make requests of a *real* Elasticsearch server, but we certainly don't want our tests to trigger requests to a live, production database. In addition, we don't want to depend on our real Elasticsearch server having specific, consistent results for us to test against, because that would make our tests flaky (and flaky tests are sometimes described as worse than not having tests at all).

One solution to this is to create a trivial Elasticsearch server as part of our testing code. We can do this relatively easily because we already have an API definition for it above. With a *real* server, we can then let our own application make requests of it and we'll simulate different scenarios in order to make sure our application responds the way we expect it to.

Let's start with some helpers which will allow us to run a testing version of our Elasticsearch server in another thread:

```
-- | We'll run the Elasticsearch server so we can test behaviors
withElasticsearch :: IO () -> IO ()
withElasticsearch action =
  bracket (liftIO $ C.forkIO $ Warp.run 9999 esTestApp)
    C.killThread
    (const action)

esTestApp :: Application
esTestApp = serve (Proxy :: Proxy SearchAPI) esTestServer

esTestServer :: Server SearchAPI
esTestServer = getESDocument

-- This is the *mock* handler we're going to use. We create it
-- here specifically to trigger different behavior in our tests.
getESDocument :: Integer -> Handler Value
getESDocument docId
```

(continues on next page)

(continued from previous page)

```

-- arbitrary things we can use in our tests to simulate failure:
-- we want to trigger different code paths.
| docId > 1000 = throwError err500
| docId > 500 = pure . Object $ HM.fromList [("bad", String "data")]
| otherwise = pure $ Object $ HM.fromList [("_source", Object $ HM.fromList [("a", _
↪String "b"))])]

```

Now, we should be ready to write some tests.

In this case, we're going to use `hspec-wai`, which will give us a simple way to run our application, make requests, and make assertions against the responses we receive.

Hopefully, this will simplify our testing code:

```

thirdPartyResourcesSpec :: Spec
thirdPartyResourcesSpec = around_ withElasticsearch $ do
  -- we call `with` from `hspec-wai` and pass *real* `Application`
  with (pure $ docsApp "localhost" "9999") $ do
    describe "GET /docs" $ do
      it "should be able to get a document" $
        -- `get` is a function from hspec-wai`.
        get "/docs/1" `shouldRespondWith` 200
      it "should be able to handle connection failures" $
        get "/docs/1001" `shouldRespondWith` 404
      it "should be able to handle parsing failures" $
        get "/docs/501" `shouldRespondWith` 400
      it "should be able to handle odd HTTP requests" $
        -- we can also make all kinds of arbitrary custom requests to see how
        -- our server responds using the `request` function:
        -- request :: Method -> ByteString -> [Header]
        --   -> LB.ByteString -> WaiSession SResponse
        request methodPost "/docs/501" [] "{\" `shouldRespondWith` 405"
      it "we can also do more with the Response using hspec-wai's matchers" $
        -- see also `MatchHeader` and JSON-matching tools as well...
        get "/docs/1" `shouldRespondWith` 200 { matchBody = MatchBody bodyMatcher }

bodyMatcher :: [Network.HTTP.Types.Header] -> Body -> Maybe String
bodyMatcher _ body = case (decode body :: Maybe Value) of
  -- success in this case means we return `Nothing`
  Just val | val == (Object $ HM.fromList [("a", String "b")]) -> Nothing
  _ -> Just "This is how we represent failure: this message will be printed"

```

Out of the box, `hspec-wai` provides a lot of useful tools for us to run tests against our application. What happens when we run these tests?

```

$ cabal new-test all
...

GET /docs
  should be able to get a document
  should be able to handle connection failures
  should be able to handle parsing failures
  should be able to handle odd HTTP requests
  we can also do more with the Response using hspec-wai's matchers

```

Fortunately, they all passed! Let's move to another strategy: whole-API testing.

2.20.6 Servant Quickcheck

`servant-quickcheck` is a project that allows users to write tests for whole Servant APIs using quickcheck-style property-checking mechanisms.

`servant-quickcheck` is great for asserting API-wide rules, such as “no endpoint throws a 500” or “all 301 status codes also come with a Location header”. The project even comes with a number of predicates that reference the [RFCs](#) they originate from.

In other words, it’s one way to assert that your APIs conform to specs and best practices.

Quickcheckable API

Let’s make an API and a server to demonstrate how to use `servant-quickcheck`:

```

type API = ReqBody '[JSON] String -> Post '[JSON] String
        :<|> Get '[JSON] Int
        :<|> BasicAuth "some-realm" () -> Get '[JSON] ()

api :: Proxy API
api = Proxy

server :: IO (Server API)
server = do
  mvar <- newMVar ""
  return $ (\x -> liftIO $ swapMVar mvar x)
         :<|> (liftIO $ readMVar mvar >>= return . length)
         :<|> (const $ return ())

```

Using `servant-quickcheck`

Let’s build some tests for our API using `servant-quickcheck`.

Similar to the above examples, we’re going to create Specs, but in this case, we’ll rely on a number of predicates available from `servant-quickcheck` to see if our API server conforms to best practices:

```

-- Let's set some QuickCheck values
args :: Args
args = defaultArgs { maxSuccess = 500 }

-- Here's a Servant Context object we'll use
ctx :: Context '[BasicAuthCheck ()]
ctx = BasicAuthCheck (const . return $ NoSuchUser) .. EmptyContext

servantQuickcheckSpec :: Spec
servantQuickcheckSpec = describe "" $ do
  it "API demonstrates best practices" $
    -- `withServerServer` and `withServantServerAndContext` come from `servant-
    -->quickcheck`
    withServantServerAndContext api ctx server $ \burl ->
      -- `serverSatisfies` and the predicates also come from `servant-quickcheck`
      serverSatisfies api burl args (unauthorizedContainsWWWAuthenticate
                                   <%> not500
                                   <%> onlyJsonObject -- this one isn't true!
                                   <%> mempty)

```

(continues on next page)

(continued from previous page)

```

it "API doesn't have these things implemented yet" $
  withServantServerAndContext api ctx server $ \burl -> do
    serverDoesntSatisfy api burl args (getsHaveCacheControlHeader
      <%> notAllowedContainsAllowHeader
      <%> mempty)

```

Let's see what happens when we run these tests:

```

API demonstrates best practices FAILED [2]
+++ OK, passed 500 tests.
API doesn't have these things implemented yet

src/Servant/QuickCheck/Internal/QuickCheck.hs:143:11:
2) Main[339:25] API demonstrates best practices
   Failed:
   Just Predicate failed
   Predicate: onlyJsonObjects

   Response:
     Status code: 200
     Headers:   "Transfer-Encoding": "chunked"
               "Date": "Fri, 12 Oct 2018 04:36:22 GMT"
               "Server": "Warp/3.2.25"
               "Content-Type": "application/json;charset=utf-8"
     Body: ""

   To rerun use: --match "/Main[339:25]/API demonstrates best practices/"

Randomized with seed 1046277487

Finished in 0.4306 seconds

```

Hmm. It looks like we *thought* our API only returned JSON objects, which is a best practice, but in fact, we *did* have an endpoint that returned an empty body, which you can see in the printed response above: `Body: ""`. We should consider revising our API to only return top-level JSON Objects in the future!

Other Cool Things

`servant-quickcheck` also has a cool mechanism where you can compare two API servers to demonstrate that they respond identically to requests. This may be useful if you are planning to rewrite one API in another language or with another web framework. You have to specify whether you're looking for `jsonEquality` vs regular `ByteString` equality, though.

2.20.7 Conclusion

There are lots of techniques for testing and we only covered a few here.

Useful libraries such as `hspec-wai` have ways of running `Wai Applications` and sending requests to them, while `Servant`'s type-level DSL for defining APIs allows us to more easily mock out servers and to derive clients, which will only craft valid requests.

Lastly, if you want a broad overview of where your application fits in with regard to best practices, consider using `servant-quickcheck`.

This program is available as a cabal project [here](#).

2.21 OpenID Connect

Use OpenID Connect to authenticate your users. This example use google OIDC provider. It was made for a working with single page application where some login token would be saved in the user agent local storage.

Workflow:

1. user is presented with a login button,
2. when the user clicks on the button it is redirected to the OIDC provider,
3. the user login in the OIDC provider,
4. the OIDC provider will redirect the user and provide a code,
5. the server will use this code to make a POST to the OIDC provider and will get back authentication infos,
6. The user will get display an HTML page that will save a secret identifying him in the local storage, then it will be redirected to /.

Let's put the imports behind us:

```
{-# LANGUAGE DataKinds           #-}
{-# LANGUAGE DeriveGeneric      #-}
{-# LANGUAGE DuplicateRecordFields #-}
{-# LANGUAGE FlexibleContexts   #-}
{-# LANGUAGE FlexibleInstances   #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE NoImplicitPrelude   #-}
{-# LANGUAGE OverloadedLists    #-}
{-# LANGUAGE OverloadedStrings  #-}
{-# LANGUAGE PartialTypeSignatures #-}
{-# LANGUAGE PolyKinds          #-}
{-# LANGUAGE RankNTypes         #-}
{-# LANGUAGE RecordWildCards    #-}
{-# LANGUAGE ScopedTypeVariables #-}
{-# LANGUAGE TypeFamilies       #-}
{-# LANGUAGE TypeOperators      #-}
{-# LANGUAGE TypeSynonymInstances #-}

module Main where

import           Protolude

import           Data.Aeson
                (FromJSON (..), (.:))

import qualified Data.Aeson           as JSON
import qualified Data.Aeson.Types     as AeT
import qualified Data.ByteString.Lazy as LBS
import qualified Data.List            as List
import qualified Data.Text             as Text
import           Jose.Jwt
                (Jwt (..), decodeClaims)
import           Network.HTTP.Client
                (Manager, newManager)
import           Network.HTTP.Client.TLS
                (tlsManagerSettings)
```

(continues on next page)

(continued from previous page)

```

import      Network.Wai.Handler.Warp
            (run)
import      Servant
import      Servant.HTML.Blaze
            (HTML)
import qualified System.Random                as Random
import      Text.Blaze
            (ToMarkup (..))
import qualified Text.Blaze.Html              as H
import      Text.Blaze.Html5
            ((!))
import qualified Text.Blaze.Html5            as H
import qualified Text.Blaze.Html5.Attributes as HA
import      Text.Blaze.Renderer.Utf8
            (renderMarkup)
import qualified Web.OIDC.Client              as O

```

You'll need to create a new OpenID Connect client in an OpenID Provider. This example was tested with Google.

You can find a list of public OIDC provider here: <https://connect2id.com/products/nimbus-oidc-connect-sdk/openid-connect-providers>

I copied some here:

- Google: <https://developers.google.com/identity/protocols/OpenIDConnect> more precisely: <https://console.developers.google.com/apis/credentials>
- Microsoft: [https://docs.microsoft.com/en-us/previous-versions/azure/dn645541\(v=azure.100\)](https://docs.microsoft.com/en-us/previous-versions/azure/dn645541(v=azure.100))
- Yahoo: https://developer.yahoo.com/oauth2/guide/openid_connect/
- PayPal: <https://developer.paypal.com/docs/integration/direct/identity/log-in-with-paypal/>

During the configuration you'll need to provide a redirect uri. The `redirect_uri` should correspond to the uri user will be redirected to after a successful login into the OpenID provider.

So during your test, you should certainly just use `http://localhost:3000/login/cb`. In general you should use your own domain name.

You'll then be given a `client_id` and a `client_password`. Fill those values in here:

```

oidcConf :: OIDCConf
oidcConf = OIDCConf { redirectUri = "http://localhost:3000/login/cb"
                    , clientId = "xxxxxxxxxxxx-xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx.apps.
↳googleusercontent.com"
                    , clientPassword = "*****" }

```

Then we declare our main server:

```

main :: IO ()
main = do
  oidcEnv <- initOIDC oidcConf
  run 3000 (app oidcEnv)

type API = IdentityRoutes Customer
        :<|> Get '[HTML] Homepage

api :: Proxy API
api = Proxy

```

(continues on next page)

```
server :: OIDCEnv -> Server API
server oidcEnv = serveOIDC oidcEnv handleOIDCLogin
                :<|> return Homepage

-- | Then main app
app :: OIDCEnv -> Application
app oidcEnv = serve api (server oidcEnv)
```

2.21.1 OIDC

That part try to separate concern, and certainly in a real world application that should be in its distinct module.

```
-- * OIDC

data OIDCConf =
  OIDCConf { redirectUri    :: ByteString
            , clientId      :: ByteString
            , clientPassword :: ByteString
            } deriving (Show, Eq)
```

First we need to initialize OIDC. A short explanation about it:

- to complete the workflow we need to make a POST request to the OIDC provider. So we need to create an http manager to make those call properly.
- Then in order to prevent replay attack, each time an user wants to login we should provide a random string called the state. When the user is redirected to the `redirect_uri`, the OIDC provider should provide the same state along a code parameter.

```
initOIDC :: OIDCConf -> IO OIDCEnv
initOIDC OIDCConf{..} = do
  mgr  <- newManager tlsManagerSettings
  prov <- O.discover "https://accounts.google.com" mgr
  let oidc = O.setCredentials clientId clientPassword redirectUri (O.newOIDC prov)
  return OIDCEnv { oidc = oidc
                  , mgr = mgr
                  , genState = genRandomBS
                  , prov = prov
                  , redirectUri = redirectUri
                  , clientId = clientId
                  , clientPassword = clientPassword
                  }

data OIDCEnv = OIDCEnv { oidc      :: O.OIDC
                       , mgr      :: Manager
                       , genState  :: IO ByteString
                       , prov     :: O.Provider
                       , redirectUri :: ByteString
                       , clientId  :: ByteString
                       , clientPassword :: ByteString
                       }
```

The IdentityRoutes are two endpoints:

- an endpoint to redirect the users to the OIDC Provider,

- another one the user will be redirected to from the OIDC Provider.

```

type IdentityRoutes a =
  "login" :> ( -- redirect User to the OpenID Provider
    Get '[JSON] NoContent
    -- render the page that will save the user creds in the user-agent
    :<|> "cb" :> QueryParam "error" Text
           :> QueryParam "code" Text
           :> Get '[HTML] User)

-- | gen a 302 redirect helper
redirects :: (StringConv s ByteString) => s -> Handler ()
redirects url = throwError err302 { errHeaders = [("Location",toS url)]}

```

That function will generate the URL to redirect the users to when they'll click on the login link: `https://yourdomain/login`.

```

genOIDCURL :: OIDCEnv -> IO ByteString
genOIDCURL OIDCEnv{..} = do
  st <- genState -- generate a random string
  let oidcCreds = O.setCredentials clientId clientPassword redirectUri (O.newOIDC_
  ↪prov)
  loc <- O.getAuthenticationRequestUrl oidcCreds [O.openId, O.email, O.profile] (Just_
  ↪st) []
  return (show loc)

handleLogin :: OIDCEnv -> Handler NoContent
handleLogin oidcenv = do
  loc <- liftIO (genOIDCURL oidcenv)
  redirects loc
  return NoContent

```

The `AuthInfo` is about the infos we can grab from OIDC provider.

To be more precise, the user should come with a `code` (a token) and POSTING that code to the correct OIDC provider endpoint should return a JSON object. One of the fields should be named `id_token` which should be a JWT containing all the information we need. Depending on the scopes we asked we might get more information.

```

-- | @AuthInfo@
data AuthInfo = AuthInfo { email      :: Text
                          , emailVerified :: Bool
                          , name      :: Text } deriving (Eq, Show, Generic)

instance FromJSON AuthInfo where
  parseJSON (JSON.Object v) = do
    email      :: Text <- v .: "email"
    emailVerified :: Bool <- v .: "email_verified"
    name      :: Text <- v .: "name"
    return $ AuthInfo (toS email) email_verified (toS name)
  parseJSON invalid = AeT.typeMismatch "Coord" invalid
instance JSON.ToJSON AuthInfo where
  toJSON (AuthInfo e ev n) =
    JSON.object [ "email"   JSON..= (toS e :: Text)
                 , "email_verified" JSON..= ev
                 , "name"   JSON..= (toS n :: Text)
                 ]

type LoginHandler = AuthInfo -> IO (Either Text User)

```

The `handleLoggedIn` is that part that will retrieve the information from the user once he is redirected from the OIDC Provider after login.

If the user is redirected to the `redirect_uri` but with an `error` query parameter then it means something went wrong. If there is no error query param but a `code` query param it means the user successfully logged in. From there we need to make a request to the token endpoint of the OIDC provider. It's a POST that should contain the code as well as the client id and secret. Making this HTTP POST is the responsibility of `requestTokens`.

From there we extract the `claims` of the JWT contained in one of the value of the JSON returned by the POST HTTP Request.

```
data User = User { userId      :: Text
                  , userSecret  :: Text
                  , localStorageKey :: Text
                  , redirectUrl  :: Maybe Text
                  } deriving (Show, Eq, Ord)

handleLoggedIn :: OIDCEnv
              -> LoginHandler -- ^ handle successful id
              -> Maybe Text  -- ^ error
              -> Maybe Text  -- ^ code
              -> Handler User

handleLoggedIn oidcenv handleSuccessfulId err mcode =
  case err of
    Just errorMsg -> forbidden errorMsg
    Nothing -> case mcode of
      Just oauthCode -> do
        tokens <- liftIO $ O.requestTokens (oidc oidcenv) (toS oauthCode) (mgr_
↳oidcenv)
        putText . show . O.claims . O.idToken $ tokens
        let jwt = toS . unJwt . O.jwt . O.idToken $ tokens
            eAuthInfo = decodeClaims jwt :: Either O.JwtError (O.JwtHeader, AuthInfo)
        case eAuthInfo of
          Left jwtErr -> forbidden $ "JWT decode/check problem: " <> show jwtErr
          Right (_, authInfo) ->
            if emailVerified authInfo
            then do
              user <- liftIO $ handleSuccessfulId authInfo
              either forbidden return user
            else forbidden "Please verify your email"
          Nothing -> do
            liftIO $ putText "No code param"
            forbidden "no code parameter given"
```

When you render a `User` with `blaze-html`, it will generate a page with a js that will put a secret for that user in the local storage. And it will redirect the user to `/`.

```
instance ToMarkup User where
  toMarkup User{..} = H.docTypeHtml $ do
    H.head $
      H.title "Logged In"
    H.body $ do
      H.h1 "Logged In"
      H.p (H.toHtml ("Successful login with id " <> userId))
      H.script (H.toHtml ("localStorage.setItem('" <> localStorageKey <> "', '" <>
↳userSecret <> "');"
                                     <> "localStorage.setItem('user-id', '" <> userId <> "');"
                                     <> "window.location='" <> fromMaybe "/" redirectUrl <> "';" -
↳- redirect the user to /
```

(continues on next page)

(continued from previous page)

```

    ));

serveOIDC :: OIDCEnv -> LoginHandler -> Server (IdentityRoutes a)
serveOIDC oidcenv loginHandler =
  handleLogin oidcenv :<|> handleLoggedIn oidcenv loginHandler

-- * Auth
type APIKey = ByteString
type Account = Text.Text
type Conf = [(APIKey,Account)]
data Customer = Customer {
  account :: Account
  , apiKey :: APIKey
  , mail :: Maybe Text
  , fullname :: Maybe Text
  }

```

Here is the code that displays the homepage. It should contain a link to the the /login URL. When the user clicks on this link it will be redirected to Google login page with some generated information.

The page also displays the content of the local storage. And in particular the items api-key and user-id. Those items should be set after a successful login when the user is redirected to /login/cb.

The logic used generally is to use that api-key to uniquely identify a user. Another option would have been to set a cookie.

```

data Homepage = Homepage

instance ToMarkup Homepage where
  toMarkup Homepage = H.docTypeHtml $ do
    H.head $ do
      H.title "OpenID Connect Servant Example"
      H.style (H.toHtml ("body { font-family: monospace; font-size: 18px; }" :: Text.
->Text))
    H.body $ do
      H.h1 "OpenID Connect Servant Example"
      H.div $
        H.a ! HA.href "/login" $ "Click here to login"
      H.ul $ do
        H.li $ do
          H.span "API Key in Local storage: "
          H.script (H.toHtml ("document.write(localStorage.getItem('api-key'));" ::
->Text.Text))
        H.li $ do
          H.span "User ID in Local storage: "
          H.script (H.toHtml ("document.write(localStorage.getItem('user-id'));" ::
->Text.Text))

```

We need some helpers to generate random string for generating state and API Keys.

```

-- | generate a random ByteString, not necessarily extremely good randomness
-- still the password will be long enough to be very difficult to crack
genRandomBS :: IO ByteString
genRandomBS = do
  g <- Random.newStdGen
  Random.randomRs (0, n) g & take 42 & fmap toChar & readable 0 & toS & return
  where

```

(continues on next page)

```

n = length letters - 1
toChar i = letters List!! i
letters = ['A'..'Z'] <> ['0'..'9'] <> ['a'..'z']
readable :: Int -> [Char] -> [Char]
readable _ [] = []
readable i str =
  let blocksize = case n of
    0 -> 8
    1 -> 4
    2 -> 4
    3 -> 4
    _ -> 12
    block = take blocksize str
    rest = drop blocksize str
  in if List.null rest
    then str
    else block <> "-" <> readable (i+1) rest

customerFromAuthInfo :: AuthInfo -> IO Customer
customerFromAuthInfo authInfo = do
  apikey <- genRandomBS
  return Customer { account = toS (email authInfo)
                  , apiKey = apikey
                  , mail = Just (toS (email authInfo))
                  , fullname = Just (toS (name authInfo))
                  }

handleOIDCLogin :: LoginHandler
handleOIDCLogin authInfo = do
  custInfo <- customerFromAuthInfo authInfo
  if emailVerified authInfo
    then return . Right . customerToUser $ custInfo
    else return (Left "You emails is not verified by your provider. Please verify_
->your email.")
  where
    customerToUser :: Customer -> User
    customerToUser c =
      User { userId = toS (account c)
          , userSecret = toS (apiKey c)
          , redirectUrl = Nothing
          , localStorageKey = "api-key"
          }

```

2.21.2 Error helpers

```

data Err = Err { errTitle :: Text
                , errMsg :: Text }

instance ToMarkup Err where
  toMarkup Err{..} = H.docTypeHtml $ do
    H.head $ do
      H.title "Error"
    H.body $ do
      H.h1 (H.a ! HA.href "/" $ "Home")
      H.h2 (H.toHtml errTitle)

```

(continues on next page)

(continued from previous page)

```

    H.p (H.toHtml errMsg)

format :: ToMarkup a => a -> LBS.ByteString
format err = toMarkup err & renderMarkup

appToErr :: ServerError -> Text -> ServerError
appToErr x msg = x
  { errBody = toS $ format (Err (toS (errReasonPhrase x)) msg)
  , errHeaders = [("Content-Type", "text/html")] }

unauthorized :: (MonadError ServerError m) => Text -> m a
unauthorized = throwError . unauthorizedErr

unauthorizedErr :: Text -> ServerError
unauthorizedErr = appToErr err401

forbidden :: (MonadError ServerError m) => Text -> m a
forbidden = throwError . forbiddenErr

forbiddenErr :: Text -> ServerError
forbiddenErr = appToErr err403

notFound :: (MonadError ServerError m) => Text -> m a
notFound = throwError . notFoundErr

notFoundErr :: Text -> ServerError
notFoundErr = appToErr err404

preconditionFailed :: (MonadError ServerError m) => Text -> m a
preconditionFailed = throwError . preconditionFailedErr

preconditionFailedErr :: Text -> ServerError
preconditionFailedErr = appToErr err412

serverError :: (MonadError ServerError m) => Text -> m a
serverError = throwError . serverErrorErr

serverErrorErr :: Text -> ServerError
serverErrorErr = appToErr err500

```

Example Projects

- **[example-servant-minimal](https://github.com/haskell-servant/example-servant-minimal):**
A minimal example for a web server written using **servant-server**, including a test-suite using **hspec**(<http://hspec.github.io/>) and **servant-client**.
- **[servant-examples](https://github.com/sras/servant-examples):**
Similar to [the cookbook](https://docs.servant.dev/en/latest/cookbook/index.html) but with no explanations, for developers who just want to look at code examples to find out how to do X or Y with servant.
- **[stack-templates](https://github.com/commercialhaskell/stack-templates)**
Repository for templates for haskell projects, including some templates using **servant**. These templates can be used with *stack new*.
- **[custom-monad](https://github.com/themoritz/diener):**

A custom monad that can replace *IO* in servant applications. It adds among other things logging functionality and a reader monad (for database connections). A full usage example of servant/diener is also provided.

- **[example-servant-elm](<https://github.com/haskell-servant/example-servant-elm>):**

An example for a project consisting of

- a backend web server written using **servant-server**,
- a frontend written in [elm](<http://elm-lang.org/>) using [servant-elm](<https://github.com/mattjbray/servant-elm>) to generate client functions in elm for the API,
- test-suites for both the backend and the frontend.

- **[servant-purescript](<https://github.com/eskimor/servant-purescript/tree/master/examples/central-counter>):**

An example consisting of

- a backend that uses *servant*
- a frontend written in [PureScript](<http://www.purescript.org/>) using [servant-purescript](<https://github.com/eskimor/servant-purescript>) to generate an API wrapper in PureScript to interface the web API with

- **[example-servant-persistent](<https://github.com/haskell-servant/example-servant-persistent>):**

An example for a web server written with **servant-server** and [persistent](<https://www.stackage.org/package/persistent>) for writing data into a database.

- **[full-example-servant-elm-auth-yeshql-postgresql](<https://github.com/aRkadeFR/FlashCard>):**

A full open source website written with **servant-server**, yeshql, postgresql and elm 0.19.

- **[import Servant github search](<https://github.com/search?q=%22import+Servant%22+language%3AHaskell&type=Code>)**

It has thousands of results and can be a good way to see how people use servant in their projects or even to discover servant-related libraries.

CHAPTER 3

Helpful Links

- the central documentation (this site): docs.servant.dev
- the github repo: github.com/haskell-servant/servant
- the issue tracker (Feel free to create issues and submit PRs!): <https://github.com/haskell-servant/servant/issues>
- the irc channel: [#haskell-servant](https://libera.chat) on libera.chat
- the mailing list: groups.google.com/forum/#!forum/haskell-servant
- blog posts and videos and slides of some talks on servant: www.servant.dev
- the servant packages on hackage:
 - hackage.haskell.org/package/servant
 - hackage.haskell.org/package/servant-server
 - hackage.haskell.org/package/servant-client
 - hackage.haskell.org/package/servant-blaze
 - hackage.haskell.org/package/servant-lucid
 - hackage.haskell.org/package/servant-cassava
 - hackage.haskell.org/package/servant-docs
 - hackage.haskell.org/package/servant-foreign
 - hackage.haskell.org/package/servant-js
 - hackage.haskell.org/package/servant-mock

servant has the following guiding principles:

- concision

This is a pretty wide-ranging principle. You should be able to get nice documentation for your web servers, and client libraries, without repeating yourself. You should not have to manually serialize and deserialize your resources, but only declare how to do those things *once per type*. If a bunch of your handlers take the same query parameters, you shouldn't have to repeat that logic for each handler, but instead just "apply" it to all of them at once. Your handlers shouldn't be where composition goes to die. And so on.

- flexibility

If we haven't thought of your use case, it should still be easily achievable. If you want to use templating library X, go ahead. Forms? Do them however you want, but without difficulty. We're not opinionated.

- separation of concerns

Your handlers and your HTTP logic should be separate. True to the philosophy at the core of HTTP and REST, with **servant** your handlers return normal Haskell datatypes - that's the resource. And then from a description of your API, **servant** handles the *presentation* (i.e., the Content-Types). But that's just one example.

- type safety

Want to be sure your API meets a specification? Your compiler can check that for you. Links you can be sure exist? You got it.

To stick true to these principles, we do things a little differently than you might expect. The core idea is *reifying the description of your API*. Once reified, everything follows. We think we might be the first web framework to reify API descriptions in an extensible way. We're pretty sure we're the first to reify it as *types*.